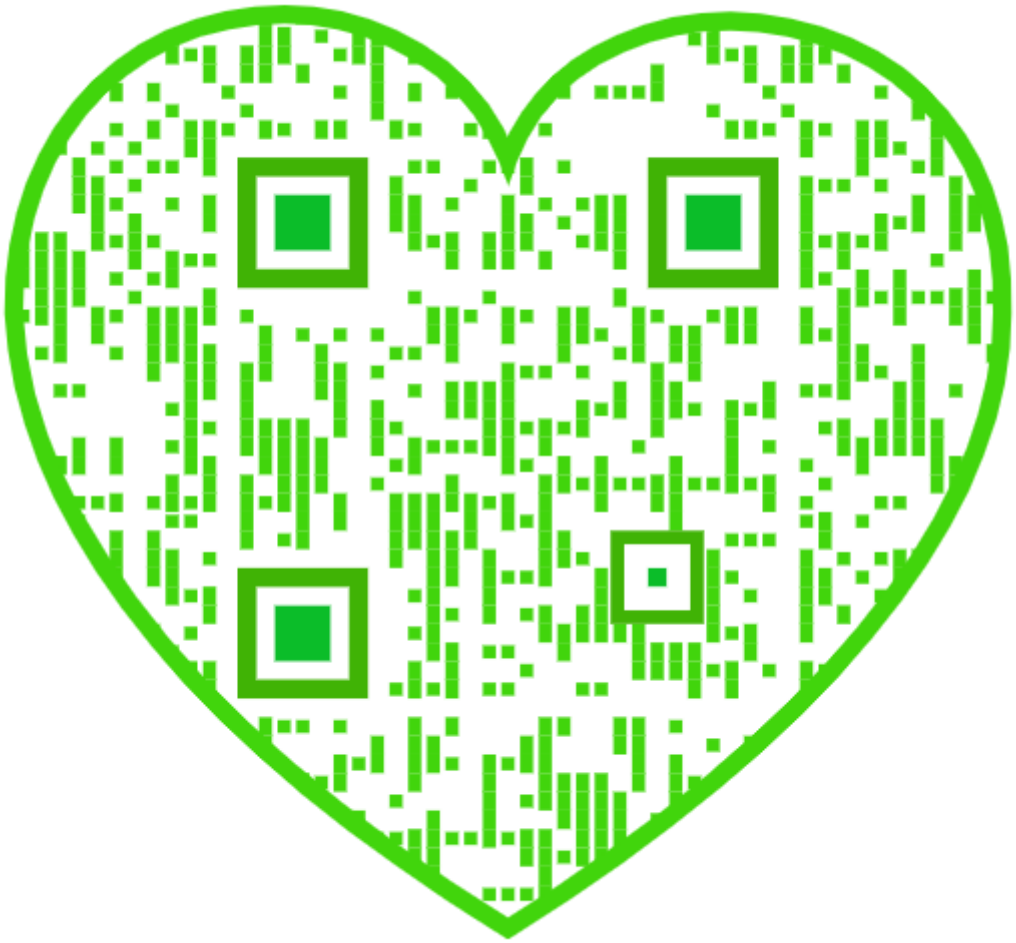

1785. e. 50.

Digitized by Google

Digitized by Google

Digitized by Google

307

Digitized by Google

Digitized by Google

Digitized by Google

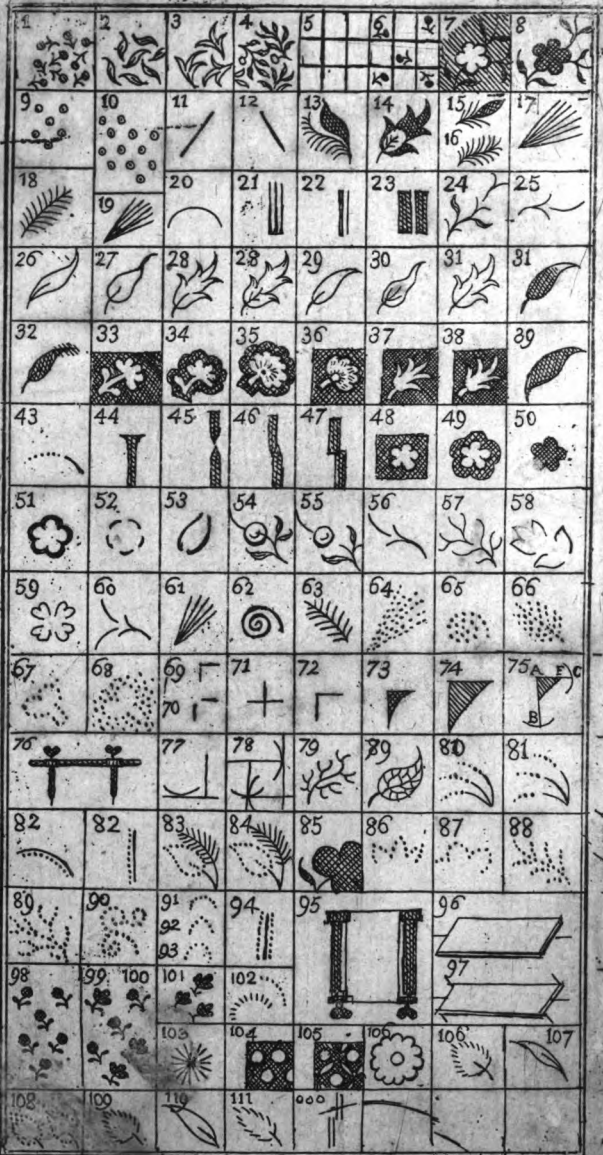
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
28
29
30
31
31
32
33
34
35
36
37
38
39
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
A
F
C
B
76
77
78
79
80
81
82
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
106
107
108
109
110
111

A

TREATISE

ON

Calico Printing,

Theoretical *and* Practical:

Including the lateſt

PHILOSOPHICAL DISCOVERIES

—any way applicable:—

ACCOMPANIED

With SUGGESTIONS

Relative to various MANUFACTURES.

Emulation without envy,
Method without formality,
Expedition without precipitancy.

VOL. I.

Printed for C. O'BRIEN, Bookſeller, Iſlington
and ſold by BEW, Paternoſter-row:
RICHARDSON, Royal Exchange:
MURRAY, Fleet-Street:
And the Bookſellers of Mancheſter,
Glaſgow, Dublin, &c.
1792.

1785 e-50
Digitized by Google

BODLEIAN
19 MAR 1938
LIBRARY

Digitized by Google

INTRODUCTION.

THE following rules and obſervations being particularly addreſſed to Artificers or Workmen in the Callico-Printing buſineſs, it is therefore deemed neceſſary to *retain* many technical words and phraſes in uſe among them, however aukward they may appear, or however remote they may be from critical propriety,—ſuch as *boundage*,—*putting on*,—*cutting a curf line*, &c. which will however be explained in another place.

To many perſons ſuch an intimation is unneceſſary, and probably it would not have been given (for nothing can prevent caviling and ill-natured conſtructions) but that one or two to whom the manuſcript was ſhewn, although they were Callico-Printers, began

Digitized by Google

to consider it more like critics; consequently their further perusal of it was dispensed with, and the copy referred to a friend or two, of discernment enough to consider the critical quality, in this case, only as a secondary one; and that the end of the publication would be answered, if the contents were rendered intelligible to those for whose use they were intended.

It is likewise suggested, that as this is the first publication of the kind, and indeed the first ever offered concerning Callico-Printing,* the writer had nothing but his own

* The writer has heard of something of this nature in France, but he understands it to be more a description of the business than on the plan of this publication, and if there was any, he is informed by the principal Booksellers there it is now out of print.—He however, will not insist that his is the only one; he may possibly be mistaken, although he has closely enquired concerning it.

Digitized by Google

own ideas to adopt and arrange; it therefore followed that it was proportionably laborious; and, however lightly some may think of the assertion, laborious it certainly was; hence he, with some confidence, conceives that any person, unless pre-determined to view every thing unfavourably, will make the necessary allowance for whatever may not be so clearly expressed, or so methodi*cally* arranged as it might be, and with equal indulgence, excuse the insertion of what may appear of too little consequence to have been remarked, or that may be perhaps repeatedly spoken of, as well as the omission of what might have been inserted, either through inadvertency, or as not having come within the scope of his observations.

It may be needful to intimate, that what may be advanced in different parts of this work,

Digitized by Google

work, as hints, free remarks, or advice*, will, probably not be very agreeable to ſome certain principals, as well as to certain claſſes of ſubordinates; but as many of thoſe obſervations naturally ſpring from the ſubject, and (if it be allowed to ſay it) as the writer wiſhes to blend precept with practice, and advice with inſtruction, he may have ſome claim to being *forgiven*;—and probably he may have a further claim when he intimates that he occaſionally ſhall make very free with himſelf.

To inveigh againſt principals, ever ſo illiberally, he is certain would recommend him

* Reſpecting the remarks interſperſed in the Rules, the writer owns he doubts the propriety of it; but thoſe whom he conſulted being divided in opinion, he took his own, for reaſons advanced above.

Digitized by Google

him to many of the ſubordinate claſſes; and ſome maſters would perhaps wiſh for a knowledge of all the little deceptive or colluſive practices common enough among workmen; but of what ſervice ſuch a diſplay would be, it will not be here diſcuſſed, as ſomething on that head will be ſaid in another place.—He however begs leave to ſay here, that what he does offer as advice, or where he touches or expatiates on improprieties in any ſhape, he wiſhes it not to be thought as proceeding from arrogance, or oſtentation (for he has his own faults in common with others) in ſhort, to cloſe this apology, he plainly begs neither maſter nor man to be offended with the freedom he neceſſarily takes; the ſubject requiring it, often irreſiſtably impelled him to it; but, at any rate, he would not be thought forward to ſubvert that dignity which a principal ought to maintain, nor recommend to a ſubordinate

the

Digitized by Google

the uſurpation of a conſequence, or refractorineſs incompatible with his ſituation; though at the ſame time that dignity ſhould not think the comfort or convenience of ſubordinates, below its conſideration.

Reſpecting the rules, given for the performance of the mechanical or operative parts, which this treatiſe exhibits, it may be premiſed, that however ſyſtematically or clearly any ſubject may, to ſome perſons, appear to be treated, yet others, from various cauſes, may not ſee it ſo clearly, nor conceive it very readily, and in conſequence are not very forward to adopt it in any particular; for, to ſay nothing of the unwillingneſs of perſons in general to be taught, and the natural propenſity of every one to ſeek for faults, or diſtort what they cannot controvert, there is often a faſhion in being wrong, a kind of prejudice for old cuſ-

toms,

Digitized by Google

toms; and of courſe an antipathy to any thing offered for improvement. As for thoſe who, from narrow and illiberal motives, are in the habit of depreciating or condemning any thing; their animadverſions are of little conſideration with the writer.* But reſpecting others, who think they need information or aſſiſtance, and are not above receiving it; to them, and them only, they are

* The writer has obſerved, that nothing can prevent cavilling and ill-natured conſtructions, and is pretty ſure of this publication being often the ſubject of very *curious* animadverſion; and probably from the very circumſtance that ought to plead in its favour, that of being a ſubject never before treated of, and of courſe the more earneſtly ſought after, and commented on; indeed (to be pleaſant about the matter) he has received ſome amuſement from the variety of opinions

are cheerfully offered, as the reſult of ſome obſervation and experience; digeſted into a ſet of practical rules, in order that they may be the eaſier retained in memory, or reverted to as circumſtances occur; or at leaſt ſuch perſons may view them as mere hints, on which their own judgments may improve, and their occaſional obſervations in the courſe of their practice further illuſtrate; for

---

opinions of which he has heard, before its publication; liberal obſervations or objections concerning the whole, or any part, he will however thank any one for communicating to him, as it is more than probable he may be miſtaken in ſome points, eſpecially in matters of mere opinion or his meaning may be really miſconceived by others; and with thoſe who chuſe to be facetious about any part, he will join in the laugh, but he muſt really beg to be excuſed (as above ſaid) beſtowing attention to the effuſions of ſelf-ſufficiency, ill-nature, or downright ignorance.

Digitized by Google

for (to be more diffuſive on this point) notwithſtanding ſeveral perſons may agree in what an intended effect ſhould be, and even in the mode of producing that effect; yet, as there are many circumſtances in the operative parts of every profeſſion, that cannot by any means be clearly expreſſed, (as we often get our ideas from practice only) it unfortunately follows that if the manner of laying down rules for the performance of any thing by one perſon, does not in ſome meaſure coincide with another's idea of that manner, he cannot ſee the uſefulneſs of thoſe rules, nor, of courſe, the needfulneſs of following them: but waving this quaint diſcuſſion of the matter, and adverting to what is offered as rules, or directions, chiefly as relating to the operative proceſſes, and as he has diſplayed them with a view to be of ſervice,

Digitized by Google

ſervice, the writer with truth can ſay, he has found them of uſe to himſelf, * and has rendered them ſo to others; and therefore this is certain, that if offered and conſidered as hints only, (as before-mentioned) that perſon muſt be very dull or very indolent indeed, who cannot raiſe from them ſome kind of plan more congenial to his own ideas, and conſequently more conducive to his convenience and emolument.

But

---

*The writer's ſituation having required a general attention to various departments in Callico-Printing, induced him to form a plan for his own uſe, from which circumſtance the idea originated of publiſhing this work, and which on conſulting with a friend or two of ſome reſpectability and judgment as Callico-Printers, it was determined on, and accordingly put in practice.

Digitized by Google

But, previous to the conſideration of thoſe rules, as applied to the different departments, it may be obſerved, that in laying down many of them, it unavoidably happened, that ſpeaking of one branch, ſomething reſpecting others occurred, which with propriety could only be introduced in thoſe places:* where it could be done otherwiſe, it

* This, as it ſhews how connected with, and dependant on each other, the different departments are, it is here adviſed, (and is repeated further on) that as no one can be a maſter of one without a certain acquaintance with the reſt, that every one who wiſhes for information, get rid of that narrow, though natural principle, of looking only at what concerns his immediate branch; maſters particularly, for reaſons which will be enlarged on in the courſe of this work, are requeſted to keep the motto in the title page always in view.

Digitized by Google

it certainly was endeavoured, where the writer has been in ſuſpenſion, he may probably have miſplaced them; and in ſuch caſes, he muſt bow to correction; but in few words, and once for all, it is begged to be obſerved, and this may ſerve as an anſwer to all, who in particular departments, look for more than they may meet with; that the number of articles treated of, required conciſeneſs; as for thoſe who need no aſſiſtance, or think they need none, they are deſired not to proceed, unleſs they conſider it in the light of an attempt more to enforce a remembrance of what is already known, than as a work ſuperabounding with improvements, or diſcloſing any very great ſecrets, either in the theory or practice of the buſineſs to which it is announced to be an Aſſiſtant.

Digitized by Google

☞ *For reaſons which will afterwards appear, this Work is not paged;---and every Section or Branch of the Buſineſs treated of, is begun on this Side.*

Of Pattern-Drawing.

AS deſigning or drawing Patterns is the obvious ſource of the buſineſs on which this tract is written, it may be expected that ſomething will be ſaid on it by way of inſtruction or advice; but, as Pattern-Drawing depends ſo much on what every one underſtands by genius, and is ſo much governed by fancy, little can be ſaid on it to any advantage; however, as bearing ſome affinity with it, it will be conſidered in what the excellency of a Pattern-Drawer conſiſts, and what ſome of the helps are, which genius may poſſibly receive from that experience which forms the baſis of profeſſional judgment.

By a good Pattern-Drawer ſhould be underſtood one, who poſſeſſes a fertility of invention, with judgment to adapt that fertility to the beſt

Digitized by Google

purpoſe, as it regards taſte, effect, execution and expence; or at leaſt, one who can improve on what is doing by others, or can readily catch the reigning ſtyle, and by adopting it, form his deſigns accordingly.

He ſhould likewiſe have a knowledge of the buſineſs in every ſtage of its proceſs, and conſequently be enabled to anſwer, in ſome degree, how every intended effect may be obtained previous to the executive part being put into operation.

Hence the Writer ventures to ſay, that however excellently a Drawer can copy nature, or combine a number of colours, yet, if that be all, his utility is very limited, when compared with him, who without great neatneſs of drawing or brilliancy of colouring, can produce that variety which gives a ſpring to a buſineſs, ever dependant on the capriciouſneſs of taſte, and the ficklenеſs of fancy.

It may nevertheleſs be obſerved (making a tranſition from Pattern-Drawing to the Patterns themſelves) that it is difficult to ſay, what really conſtitutes a good pattern, as deciſions on that ſubject are formed by different perſons from very different motives; for inſtance, a Draper's determination

Digitized by Google

mination of one is biaſſed by what will beſt ſuit his line of trade; a Printer's, that which is adapted to produce the deſired effect at the leaſt expence; while a buyer's opinion is guided by what is moſt generally exhibited in the ſhops; and many patterns acquire the character of being good ones, merely from a Draper having it in his power to command a general diſplay of them, under every advantage; for the moſt fanciful and beſt executed pattern would have little chance of ſelling well, if ſeen but in a few places, or the ſale not otherwiſe forwarded; as it then would not have the appearance of a generally approved one, and conſequently it would be diſregarded in a proportionate degree. But, as this will be occaſionally conſidered in other places, a few ſentiments reſpecting Genius, Fancy, and Invention, as more immediately the ſubject of this ſection, will be now offered; as well as what thoſe helps are, of which genius may avail itſelf, toward directing its progreſs; with the needfulneſs and means of reſtraining its impetuoſity, or preventing its eccentricity: ſome other thoughts will likewiſe be advanced, rather more remote to the immediate ſubject, but ſtill having ſo much affinity with it, as to come under the

Digitized by Google

cognizance of a Deſigner, or thoſe who have, or deſire to have, any concern in that department. But, it may be neceſſary to obſerve, that as the ſubject gives riſe to ſeveral obſervations, not ſufficiently cloſe to be interwoven with it, therefore, for the ſake of being as methodical as poſſible, and the keeping together what is more immediately to the point, they will be reſerved for the Eſſay further on.———

Previous likewiſe to what will be ſaid in this, and the following ſection, relative to putting-on the block, the writer intimates, that, to avoid confuſion of terms, when ſpeaking of Pattern-Drawers, he ſhall moſt frequently call them Deſigners; patterns he ſhall call deſigns; Putters-on the Block he ſhall call Drawers; and their performances putting-on; but, in diſplaying the rules, ſuch diſtinction will not be affected, as he ſhall uſe them indifferently as beſt ſuits the immediate purpoſe. As for the terms Genius, Invention, and Fancy, though diſtinct ones, Fancy will be moſt likely adopted to ſerve for either, as being moſt applicable to deſigning for Callico-printing.

IN

Digitized by Google

IN the beginning of this ſection, it being ſaid a deal depends on Genius in regard to the ſubject now in view, it may be expected, that, preparatory to what will be exhibited as mechanical helps to it, ſomething will be ſaid wherein it conſiſts, how it is to be improved, what are its indications, and the like; it will therefore be attempted, not as aſpiring to any thing doctrinal, ſpecifically deſcriptive, or as ſeeking controverſy, but only as it ſeems to hold a connection with the ſubject treated of; for, till terms are explained, underſtood, and univerſally received in one unequivocal ſenſe, we animadvert in the dark, hence to aſk what Genius is, how it originates, how it performs, or where is it ſeated? leads into ſuch metaphyſical obſcurity or perplexity, that the moſt intelligent are at a loſs how to ſatisfy ſuch inquiries; for knowing little of the elementary principles of things, as the ſources are ſo remote, how can poſitive or clear conſequences be educed? therefore we ſit down at laſt with ſimply calling it a faculty of the mind, and to expreſs its operations, ſay ſomething like what is ventured to be offered further on, taking certain poſitions as principles or maxims, and accordingly draw our deductions and argue from them.

Digitized by Google

As for the diſplay or productions of genius or fancy, enough is viſible in every ſtation, and therefore though only treating of pattern-drawing, an occupation of little worth or merit in the eyes of thoſe who hold a high rank in the ſcale of artiſts, as if requiring little ſtrength of intellect, compaſs of invention, or accuracy in execution; yet, in its proper ſphere, taken in all circumſtances, it is with thoſe whom it immediately concerns, of as much importance, and as difficult to attain, as many arts or ſciences that are univerſally dignified.

Genius in any ſhape, it is obſerved, is not ſatisfied unleſs exploring unbeaten tracks, or rendering that perfect which cannot be rendered ſo by the efforts of mediocrity; to conſtitute which and to empower it ſo to act, there muſt be fancy, judgment and taſte: by fancy, various ideas ſeem to be carried to the mental repoſitory and there ſtored up to be occaſionally made uſe of; but then fancy ſhould be reſtrained or governed by judgment, or its emanations will be eccentric or extravagant; and this faculty of judgment ſeems to be properly employed in going through its collection of ideas, to ſeparate or arrange them as may be required; or in other words, judgment is

Digitized by Google

kind of counterbalance to the eccentricity of fancy, curbing it (as before intimated) when impetuous, and guiding it when prone to deviate.

Further, As judgment is chiefly underſtood to keep the fancy within proper bounds, ſo that nothing be unnatural or diſtortive; another power is requiſite to render whatever is produced, not merely free from fault, but to give it a beauty, and an elegant and highly poliſhed finiſh; which power is generally expreſſed by the term taſte; of which much has been written to define, and *to bring* under certain rules, but with little effect, being a faculty more acquired by accident than by nature, and partly depending upon circumſtances not always regulated by ſtrict propriety; but as it takes in the conſideration or knowledge of what is generally, and (in ſome caſes) univerſally, allowed to give a finiſh to the works of art; it is therefore able to form a deciſion, either as applicable to the performance under the deſigners hands, or in determining on the works of others: Taſte, however, according as it is employed, is either ſuperior, or ſubordinate to judgment; as the arbitrator of ornament, it is deſpotic; but in following nature, it muſt be ſubjective; hence, according as the fancy or judgment is likely to

be

Digitized by Google

be employed, let the deſigner attend to this diſtinction, as, in the inſtance of pattern-drawing, taſte is to be underſtood as the uppermoſt quality to be acquired, nature being no way in that buſineſs likely to be very cloſely imitated; but in other ſituations where the performance conſiſts in its reſemblance of nature, and that reſemblance is required, there, judgment (with taſte however at its call) muſt claim the precedency or firſt notice.

Again, Either of theſe three qualities is of little ſervice without the aſſiſtance of the others, fancy alone being very inadequate to produce what is requiſite (even when required to be wild or groteſque) for though its productions may pleaſe, it can be but for a moment; but, when regulated by judgment and adorned by taſte, it ſtrikes almoſt univerſally; the decorative part pleaſing thoſe who know but little, or overlook that of the natural; and thoſe who look for propriety, find it, with the addition of that heightening or vivification which true taſte imparts; for when theſe are united, they of courſe ſtrengthen and add to each others power and effect, exhibiting ſomething novel, expreſſed with propriety, and embelliſhed with elegance; genius, which is the vivifying

Digitized by Google

vivifying ſpark, giving a ſpring and ſpirit to the whole; and without which, the moſt elaborate works of judgment will never give much pleaſure to any one of a refined and comprehenſive turn, though for a while they may pleaſe a frigid obſerver.

It is not the buſineſs of this little effuſion to particularize the indications of genius further than as immediately applicable to the mechanical operations diſplayed further on; the writer however will juſt mention that many have been deceived by an early indication of ſuch a gift, forming great expectations that when ripened, it would acquire much celebrity; but, it is not eaſy in juvenile objects to ſay into what road it may hereafter ſtrike, for until their productions may be ſuppoſed to be regulated by that degree of diſcernment, which requires ſome maturity of years, there can be little of what is termed judgment: hence many youths have been put to deſigning though it has afterwards appeared their talents have been much over-rated; and in deciding on ſuch indications, a caution ſhould be obſerved, for though genius may ſeem to improve as maturity approaches; yet ere that epocha commences, it may have paſſed its meridian; which is ſeen frequently

Digitized by Google

frequently to be the caſe, whenever a remarkable early diſplay of genius has been viſible: beſides, people who thus haſtily decide, are not aware, that while they do not expect a perfect performance, and look but for an attempt, they only commend its proximity to perfection; but when the time comes that ſomething maſterly ſhould be produced, the performer may ſhew that his genius was not of the kind to arrive at that height; and then, thoſe who predicted great effects, are proportionably diſappointed and mortified.

It is impoſſible to ſpecify all the impediments to a lad's improvement, or the helps he may receive, a deal depends on either; for inſtance, a youth with ſtrong indications of genius may be placed where there is no one proper to cultivate it, the ſituation* or courſe of work may not be congenial

* This may be alluded to as particularly applicable to lads being put out to Pattern-drawers who work at home (and it holds good reſpecting Cutters and Engravers) though this is an error in thoſe who put them out; for when out of their times they have in effect another term to ſerve before they know any thing beyond the uſe of the pencil, the knife, or graver, otherwiſe than by mere precept; and, of courſe, can be but of proportionate ſervice at a manufactory.

Digitized by Google

congenial to his natural aptitude, or he may be precluded thoſe circumſtances which are neceſſary to give him confidence, and improve his underſtanding in general matters; theſe are points (lamentably for the youth) too often totally diſregarded,---and from theſe and other reaſons, it may be advanced, that there are ſo very few good pattern drawers, (according to the definition juſt given) though ſuch numbers have ſerved as apprentices, or been pupils to pattern drawing, and this leads to ſay, thinking how forward *many* are, to take pupils or apprentices to drawing (leaving the *weighty* conſideration of premiums out of the queſtion) that thoſe who have youths to put out, and thoſe who are inclined to take them, ſhould not be very prompt either way, from the conſiderations mentioned above, as well as what follows; for it is of little ſignification to ſay, that ſuch a lad ſhews a great genius or taſte for drawing, or any buſineſs depending on fancy, unleſs there is ſome indication of an underſtanding equally acute and comprehenſive in general matters, with other concomitants of vivacity, good diſpoſition, and a plaſtic temper; as then, and then only, there ſeems hopes of his genius, whatever bent it may take, furniſhing itſelf in its approaches to maturity, as circumſtances offer, with every requiſite towards improving

Digitized by Google

improving it, and that without the formal impoſition of precept, rule, and frigid advice; conſequently when arrived at that age, in which ſomething beyond a mere effort is expected, his own hopes and views, as well as thoſe of others, will not be diſappointed.

It is begged that what is above advanced be not underſtood as giving into the common mode of inveighing againſt taking apprentices, from the probability of leſſening the value or ſcarcity of deſigners, who have paſſed their noviciate (as may likewiſe be ſaid of other branches) what has been ſaid, is more directed to parents, who are prejudiced in favor of their children's talents, or through fondneſs miſtake their inclination for genius, for unleſs a lad is likely to ſhew thoſe faculties which will get him through life with credit and eaſe as an artiſt (in which claſs deſigners may be included) he had better be put to any common mechanical employment, as certainly nothing can be a greater miſery to a man, than to think his living depends upon the productions of fancy, and he is unfortunate enough not to poſſeſs a ſingle ray of it, and that, conſequently, his utmoſt exertions are deſpicable, and of courſe not worth exhibiting.

The

Digitized by Google

The writer will now endeavour, perhaps not over methodically, to throw in such documents as seem to him most likely to assist the fancy in its exertions, and with such remarks as occasionally arise, either as more or less applicable to the designer or his employer; and before he speaks of the mechanical parts of designing, he will dwell a little on some circumstances not totally irrevalent to such employment, and probably not absolutely unworthy the notice of either party; for, though the aim may be missed, the intention is to render the performance more easy to one party, and consequently more advantageous to the other.

In the first place, it is suggested, a Designer ought not, by any means, to be considered in so mechanical a light, as if fancy or invention were of such a nature, that he can at all times command a successful operation *; similar to a person

* Those are particularly alluded to here, who are engaged as Designers to work a stated number of hours in a day. But to treat Designers with proper address is what few Principals are competent to.—See something to this effect in the Note at the end of Pinning.

Digitized by Google

perſon performing a merely mechanical piece of work, in which little more than utenſils are needful, and the ſubject to be acted on is immediately and conveniently at hand. To illuſtrate which, it may be obſerved, that Principals themſelves, at times, affect to ſay, Deſigners ſhould only work when ſo diſpoſed, yet many of them, inconſiſtently with ſuch a poſition, think nothing done unleſs they ſee ſomething on paper; making hardly any account of what the invention is at work upon; but, contrary to this practice, it is here ſaid, that the deſigner ſhould not be aſked, except on ſingular occaſions, how he means to do ſuch a part? what will be put in this or that place? what will be the colour of this object? and ſo on; but that a proper mode is, (when not left entirely to work from his own fancy) for him to be told what ſort of patterns is wanted; on which, he accordingly draws a number ſlightly, or perhaps nearly perfect, agreeable to the nature of them; from theſe a ſelection is made as having the beſt effect; afterwards another is made, including that quality, with their adaptation for working; and even from theſe it may be needful to make a ſelection as proper to ſhew, or to be put into execution.

All

All this is however offered as matter of opinion, or only to be put in practice where and when it can be done conveniently, as at all times and in all places it cannot, neither is it always neceſſary; but this is however inſiſted on, that a Deſigner can do little with pleaſure to himſelf at a Printing-ground, if under reſtraint, or ſubject to that kind of controul, or enquiry, which has been expreſſed above; or if his employer be of that caſt, who conſider all under them as but mere machines to procure themſelves profit, and that as ſuch, they have nothing to do but to ſpur every one on by any method, however coarſe and unfeeling.

Reſpecting this operation, and indeed any other, it may likewiſe be noted, that one perſon only is proper to give orders (no matter how many have been previouſly adviſed with) for rarely do two or more agree in opinion; and for a deſigner or any other to receive orders from ſeveral, and thoſe orders different, or countermanding, no one need be informed, is productive of much embarraſſment, and often ſubverſive of what each party deſires.

But turning now to the immediate ſubject of this ſection, and in particular alluding to fancy, it

Digitized by Google

it is ſuggeſted that every one is prejudiced in favor of his own ideas, or what he concludes or wiſhes to be underſtood as ſuch, Principals are particularly prone to be much in love with ſuch apparently new ideas, and not being always under the neceſſity of conſulting any one, they often adopt and put in execution, too precipitately, what has ſtruck them as valuable; not diſcovering how they have deceived themſelves, till they find no other perſon ſeems ſtruck by its appearance when diſplayed, as they were by it in idea; for if they firſt ſpeak of ſuch an idea to their ſubordinates as very ſtriking, they not being always at liberty to paſs ſentence, or even give their opinions with that freedom which the principal can and will on what they might offer, the infatuation does not go off ſo ſoon, nor is it ſeen as ſuch till too late.

Drapers likewiſe frequently getting hold of an idea, adopt it as a good one, and endeavour to communicate it (perhaps with a friendly intention) but are often greatly diſappointed when what is drawn in conſequence of ſuch communication

cation does not give the effect they want*. A great deal of time, trouble, and other inconvenience would however certainly be prevented, by letting thoſe *wonderfully ſtriking* ideas reſt a little till thought of more coolly; and then, if no dimunition happens in their apparent value, or

---

* The above ſuggeſtions lead the Writer to obſerve that ſome will ſay if they could but uſe the pencil, they are ſure they could produce ſomething wonderful new, and ſtriking in effect!—to combat unthoughtful prepoſſeſſions of ſuch a kind the writer knows would be to little purpoſe; he will only ſay of this, that he who advances ſuch a notion, can know nothing of the operation of the inventive faculty in ſuch a caſe, and of courſe does not diſtinguiſh between a certain end or point repreſented to him by the livelineſs of imagination, diveſted of all obſtructions to its appearing ſo forcible in novelty and effect, and the operation neceſſary to produce or diſplay it on paper by a mechanical or manual proceſs, with the uſual interruptions of objections, impediments, reviſions, diſſatisfactions, &c.

Digitized by Google

or ideal effect, there is the greater probability of their ſucceeding and ſtriking more univerſally.*

It often happens too, that many (Drapers particularly) are violent in requiring ſomething new,

* Speaking of this infatuation in favour of ſelf-created ideas, the following little anecdote is offered, and which ſhews at the ſame time how with a little fineſſe, a weak ſide may be played with: A perſon having to ſhew a number of patterns, as townſman (when it was the cuſtom to take a quantity of patterns only at ſtated times, and after ſhewing them, to make them general) having diſplayed them before a Draper, He, after praiſing ſome, and rejecting others, ſaid of one, that if altered in ſuch a manner it would be much better; the perſon who ſhewed the patterns, willing to temporize, told him his obſervation was judicious, and added, to heighten the flattery, that ſeveral others had made exactly the ſame obſervation; this ſo pleaſed the Draper, that he ſet about altering every one of the patterns in the ſame *judicious* ſtile, and took ſuch pleaſure in his employment, and retained the other ſo long, that he had little time to go elſewhere that day, reſolving to take care for the future, how he commended the alterations ſuggeſted by the ſame perſon again.

Digitized by Google

new, or totally different from what has ever been ſeen; all this has a buſy ſound, and in idea promiſes great deal, or at leaſt implies the hope of a great deal; but could it be procured, the expectation might not be anſwered, as it generally ſeems that when any thing happens to be produced, very different from the common run or appearance of work, or what may be called the reigning ſtyle; it has not the chance of getting into vogue, for reaſons already given, except when a Draper of eminence, who holds his connections as it were by a *bridle*, is determined to puſh what is a favourite of his; though even that will not always ſucceed; for ſomehow or other capital blunders are now and then made by the moſt experienced, in the chuſing of patterns. Cautious Drapers however are not very forward in this reſpect; they know, indeed all muſt, that though at all times there are certain claſſes of patterns that enſure ſale, yet a continuation of one ſtile, will tire in time; and the utmoſt efforts to continue it, will not always be propitious; * for innovations

* This may be illuſtrated by a capital connection in town, fruitleſsly attempting

tions in ſtyle, rarely happen abruptly; they are brought about by ſlow degrees, or in fact more by accident than deſign, and oftentimes in a manner contrary to what any one might conceive. Much, to be ſure, is ſometimes ſaid of the ficklenefs and whimſicalneſs of Drapers and others, but there ſurely is little cauſe, it being natural to be tired of any thing ever ſo excellent when very familiar, and of courſe novel or different appearances are ſought after; but when intereſted views are annexed, and thoſe variations cannot be ſufficiently obtained, it is juſt as natural to repine.

There was a time when no one thought grounding off the table could be performed as it now is; the writer well remembers when it was in agitation, to print two reds and two olaves at the houſe where firſt executed *. All the Printers exclaimed that the two after-colours could never be put in according to the deſigns; it

attempting for two or three ſeaſons to force ſtripes into vogue; but though the work was generally good, the effort ſubſided under the prevalency of a different ſtyle.

* This was at Weſt-Ham, Eſſex.

Digitized by Google

it was however attempted, and it ſucceeded, and nothing but that courſe of work was done there that ſeaſon. The next ſeaſon, indeed ſhortly after, it was attempted at other places; and now little difficulty (comparatively ſpeaking) is experienced in it.

It may likewiſe be ſaid of black, dove, and yellow patterns; at firſt the grand objection to executing them was that a black could not be procured; hence when dove was introduced, it was done off the table, by thoſe, who wedded to the *old* ſyſtem, execrated an innovation, which then, for the honour of a good black, appeared diſcreditable; but others, who were leſs tenacious of ſuch honour, as well as for other ſufficient reaſons, ſoon brought that courſe of work into vogue; and now, or at leaſt very lately, what courſe was more general? it may be ſaid too, in ſpeaking of black, that formerly it was a maxim no pattern with a mixture of colours would do without it; but it is not thought ſo now.

What the writer has now to advance, as rules or documents reſpecting deſigning, would follow here properly enough, but having little to advance, and that little not ſatisfactory even

to

Digitized by Google

to himſelf, he will defer it to the end of the ſection; obſerving however, as leading to what he means to ſay about Genius, Fancy, Invention, and drawing, that more might very probably be ſaid or advanced as Rules, but Genius or Fancy cannot be dictated to; Fancy muſt, in many caſes, be left almoſt intirely to itſelf, as not coming under a mechanical deſcription, or analyſis: much to be ſure may be ſaid, and pretty diſquiſitions have been given, (perhaps theſe in this article are of the number) about judgment preſiding with coolneſs, while fancy is wandering here and there; then taſte is uſhered in to the aſſiſtance of judgment, and ſo on; but he is induced to think, that in genius is comprized that faculty which ſoon avails itſelf, whenever opportunities happen, of what is neceſſary to render its emanations effective; in fact, Rules impoſed on a natural genius, too often ſhackle it, and it is almoſt proverbial, that true genius ſoars above all precept, and looks with a becoming diſdain at the formality of rule; often producing what never would have appeared, if rules authoritatively given, had been cloſely adhered to; and it may be ſaid, when Fancy ſuffers itſelf to be pinned down to Rule, it is to be ſuſpected there is not a great deal of genius, and that thoſe who can produce little without certain rules to lead

Digitized by Google

lead them, are not much better than copyiſts or imitators; but turning to the point in view, which is the province of fancy, namely, deſigning, it is only at certain times that it is alive,* and then it deſpiſes fetters; when it is not free, like every thing elſe in diſtreſs, it catches at any aſſiſtance, and is thankful for any help that offers itſelf.

Fancy notwithſtanding, ſhould be (as before ſaid) at all events, free from certain impediments or reſtraints; which applying to a Deſigner's performance at a Printing-ground, can hardly be done; *from* the mind being confuſed with various conſiderations, that obſtruct or divert its efforts, ſuch as receiving orders from ſeveral, murmurings at not always ſucceeding, being forced to do duty at all times, and the like;† but

* What is a man's genius or fancy worth, when diſtreſſed, brow-beaten, or otherwiſe illiberally treated? and how little do many think of what are often the real cauſes of the great difference which at times appear in the works of men of genius?

† Theſe may ſeem to many but trivial obſervations, the writer however, from experience, knows the contrary; and he is certain ſome others in the moſt eligible ſituation as engaged Deſigners, know the ſame; indeed an engaged Deſigner at a Printing-Ground is now little more than a Compiler.

Digitized by Google

but chiefly too much (it is again hinted) from many Principals inceſſantly deſiring to be occularly convinced he has not been idle; for it is here aſſerted, that the firſt Deſigner in the Printing buſineſs (however the aſſertion may wound his pride) would be aſhamed to have it ſeen how diſſatisfied he is ſometimes with what he moſt endeavours to render perfect, the repetitions which he makes, the doubts he is in about rejecting this or that idea, the difficulty of fixing his attention, &c. and it is thence as confidently ſaid, that thoſe patterns which for ſeveral ſeaſons have been allowed the firſt place, would probably never have been produced, if the Deſigner had been ſhackled by the direction of others, or been in that controuled or ſubordinate ſtate, where his own inclination muſt have given way to the frigid direction of thoſe, who, more alive to gain than reputation, find no impulſe to aſcend beyond a certain height, or ſtretch out beyond a certain diſtance from the beaten path.

As for invention, ſtrictly ſpeaking, it is not here offered to ſay what it is, much leſs how to deſcribe it; there is a mutation of ſtile or taſte, to be ſure, but nothing new; for novelty is only a name for an old effect or appearance revived with a little alteration

Digitized by Google

alteration, and (making a metaphyſical excurſion) if the queſtion were aſked, what is original? an anſwer could not be eaſily obtained ſufficient to ſatisfy ſome enquirers; the term having no preciſe meaning, till it is agreed on all ſides, how ideas are acquired, whether intuitively or by ſenſation, or, in other words, whether productions termed original, are or are not but mere copies of certain archetypes, conveyed to the mind by its attendant faculties: and if the proudeſt deſigner in the printing or any other buſineſs, would be candid, he would confeſs there is not near ſo much of invention in what he produces, as he deſires the world to give him credit for; ſince if traced to the ſource it will generally appear that the mind received a hint, if not ſomething more expreſſive, from ſome viſible object or other; and it may further be ſaid, that the greateſt genius would be aſhamed to be diſcovered at the little ſhifts he often makes to attain a certain end, by ſearching into nooks and corners, as it were, for objects to ſtrike out ſomething from, or at the quantity or collection of ſubjects he ſecretly heaps up to ſupply himſelf with thoughts and hints, and the methods he takes to diſfigure the ideas he thus more or leſs ſurreptitiouſly purloins, to make them appear novel; and too

glaring

Digitized by Google

glaring it is, how a reputed genius will contend about his claim to what is palpably plagiarism; and which among Designers in the Callico-printing business, is certainly as frequent as among other classes: Besides, if it be considered what a number of Designers are always at work, and how many thousand patterns are produced in a year, but how few of them remarkable for novelty, it must seem still more clearly there is very little of striking out of the beaten path, and much less of originality than might be expected.

In some cases it is more difficult to imitate than invent; for the quality generally demanded in an imitation, is to excel the original; but unhappily that word excel, in this case, is very vague; it may very likely be altered for the better, if alluding to its being rendered easier to work; but almost every different person will have a different idea about its appearing better, or having a better effect, at least as far as they chuse to speak, or are at liberty so to do.

As

It is full as bad, and under ſome circumſtances, much worſe, to put on work with a fine face on a beachy block; as in printing, or even under a Cutter's hands, the ſurface will crumble away.

Other circumſtances may ſpring up which cannot be preciſely aſcertained, but by attending to the above particulars, many of them may be obviated with very little trouble.

---

2. Take notice, or diſcover in what particular the pattern conſiſts, whether in reſpect to the colouring of it, or the ſize, quantity, or diſpoſition of the commanding objects; or, if a trail, whether it be upright or meandering, cloſe or open, and the like;---which having aſcertained, conſider how to preſerve or produce that effect on the cloth, againſt the chance of indifferent cutting, printing or colour; at the ſame time conſider where it may well be altered, or what may be left out in the cutting, ‡ or eaſed in the penciling; or, in other words, how it may be executed with the greateſt eaſe and leaſt expence.

---

‡ This may not pleaſe ſome cutters, but the Writer makes equally free with maſters, as will appear.

If

Digitized by Google

3. If the pattern be on ſo large a ſcale as to require it, be informed of what width the cloth is for which it is intended, or on what it is moſt likely to be worked, on account of the joining of the ſelvedges; making ſome allowance for the variation that will happen in reſpect to the width of cloth of the ſame kind.

Small patterns, it may be obſerved, cannot be affected in their appearance by the joining of the ſelvedges when made up: the rule particularly alludes to furnitures, whether trails, ſprigs or ſtripes; for if this circumſtance be not attended to, much of the cloth will be cut to waſte, or the joinings of the ſelvedges will have a very aukward appearance; and it is not every Upholſterer or Mantua-maker that is very ready at joining a Pattern by the ſelvedges, even if contrived in the beſt manner for that very purpoſe.

It is likewiſe neceſſary to attend to the above rule, in regulating the width of the Print, on account of the off-edge printing; as printing an edging with a fine print does it conſiderable injury; beſides, if the edging be printed as the piece goes on, the colour gathers on the off-ſide of the print, and cauſes an, otherwiſe, unneceſſary bruſhing

Digitized by Google

bruſhing of it, or a very bad impreſſion at the beginning of the next table; and if the edgings are left till the whole piece is printed, the edging is frequently fuller or barer than the reſt of the work.

The obſervations on Squaring a Block comes in here properly, but being made a ſection of itſelf, it is conſidered further on.

---

4. If you have to make out the pattern, as it often happens, from a ſmall part; and you mean to copy exactly that ſmall part, * take care that the repetition be not viſible, and that one part does not appear heavier than the reſt, and therefore, if it be a trail with objects on it or about it, obſerve whether the objects, the trail in general, or any particular part of it ſooneſt catches the eye; if it be the objects that are moſt ſtriking, they muſt be properly diſpoſed firſt, or at leaſt their intended ſituations marked out, and the ſtalk or trail then drawn to them, taking care at the ſame time to balance and uniformly mix it: If it be the trail only, or any part of it that ſtrikes moſt, that, by the ſame rule, ſhould be marked out firſt, for theſe moſt eſſential parts being judiciouſly or advantageouſly

* The repetition of a ſmall part is, however, very hazardous, for though not viſible on the block it may be ſo in the piece, as it hangs on the rolls.

Digitized by Google

vantageouſly diſpoſed, it muſt conſequently follow that the remaining ſubordinate parts may be made to compleat the uniform appearance of the whole, with proportionably leſs trouble.

In order to be certain of the joinings exhibiting as even an appearance as any other part of the face, let your joining (if poſſible) be taken from about the middle of your ſketch when made complete.

---

5. If the pattern you have to put on, be compoſed entirely of objects, or in which the objects are the commanding part, that ſtand promiſcuous, as fig. 1, whether cloſe or wide apart, be careful that one part be not more crouded, or the objects larger than in another; for nothing is of greater conſequence to guard againſt, as it is obvious to any perſon, when the aſpect of a Pattern is unequal on a piece, or even when made up.

As it is very difficult by the eye to keep objects promiſcuouſly ſituated, and at the ſame time preſerve an even face, the following expedient is offered to accompliſh it, when the objects are not very cloſe to each other, or not of a long or ſtraggling ſhape, as fig. 2, 3, and 4, as then it is beſt to ſet them at equal diſtances, and vary the face by turning the objects about in as many different directions as you can, or that the nature of the pattern will allow.

Digitized by Google

Rule a number of lines, as you can beſt make out, from the pattern, according to the diſtance the objects ſtand from each other, as Fig. 5, which done, place an object in every other ſquare, as fig. 6, that is, one at the top of a ſquare, another near the middle, another near the ſide, and ſo on, thus will you be certain of the objects having a regular appearance in the general diſpoſition of them, and at the ſame time ſtanding promiſcuouſly.

---

6. In order to aſcertain on the paper on which you make your ſketch or tracing, the joinings of trails as well as of ſprigs that are irregularly diſpoſed whether cloſely or widely ſituated, make uſe of this method.

After you have made your ſketch or tracing, repeat, either on ſeparate papers, or on one large enough for the purpoſe, as much as is neceſſary to ſhew the joinings at the head and ſides, in order to ſupply that which is defective or remove whatever may be improper; having done this, hold it ſlopingly from your ſight, and look at the whole from top to bottom, from ſide to ſide, and from corner to corner, to ſee that no lights nor heavy lines nor bodies of objects appear, and as there is generally in trails what may be called the main ſtalk, ſee that it branches out regularly from ſide to ſide, ſo that one ſide balances the

Digitized by Google

other, and that the branchings ſo run into each other that it may ſeem to flow regularly all over, and to be ſtill more certain of its even diſpoſition, hold it with the back towards you betwixt yourſelf and the light, that by ſeeing it reverſed you may know if it lean more to one ſide than the other.

7. In ſmall patterns it cannot be amiſs to put on the halves or quarters exactly alike, according to the nature of the pattern,‖ taking care that the halves or quarters are not to be diſtinguiſhed, in the repetition of them, for the conveniency of one block anſwering for the grounding of each part after it comes off the graſs whether the pattern was intended to be ſo grounded or not; for which purpoſe, as rubbing off is the leaſt certain method, an oiled paper, or a drawing from a ſtenſil is to be preferred, and a ſtenſil ſeems beſt, becauſe, as it is only a part of the pattern that is affected by the graſs grounds: except when compoſed only of plain ſet objects. If openings are cut in the ſtenſil to fit the places that are either to be covered by the grounds as fig. 7, or left open by them, as fig. 8, their ſitu-

‖ Meaning that unleſs it is on a ſmall ſcale, it is unadviſeable to do ſo, from the great difficulty of preventing a repetition being ſeen.

ations

Digitized by Google

ations may be eaſily aſcertained by marking thro' theſe openings with a tracer or pencil, and then the other parts of the pattern may be added in whatſoever manner the drawer moſt approves.

---

8. Endeavour to keep all ſprigs, or bunches of flowers, or even ſingle flowers, whole on the piece, and likewiſe the main ſtalk of a trail, if you know what will be the width of the cloth: as it will be of ſome importance in the ſale of a piece and the making of it up.

This leads to the obſervation that a Printer ſhould not let a ſprig, or principal flower, or other object get off the edge one ſide or the other; for in the caſe of ſprigs, &c. ſtanding wide apart, he may try, at leaſt, on cloth of any width, if he can preſerve them whole without leaving too broad an edging on either ſide.

---

9. A pattern with ſix ſprigs or commanding objects ſtanding as fig. 9, cannot join whole or in halves, but muſt drop or riſe one third as fig. 10, or the objects will not be at proper diſtances in the joinings, but then, of courſe, the pitches muſt be made to anſwer in the ſame manner.

In

Digitized by Google

10. In tranſverſe patterns, that is, in patterns in which the trail lines or objects run acroſs from corner to corner, the way as repreſented by fig. 11, whether in ſtripes or all over, let the tranſverſe diſpoſition appear on the cloth the way as ſhewn fig. 12. as it will thwart the right hand diſpoſition of the parts of a pattern generally obſerved in drawing, and the aptitude we uſually have to look from the left to the right; as the light is from the left, and the hand in drawing naturally tends that way, otherwiſe we ſhould be always incommoded by the ſhade of it.

---

11. The ſtraiter the work is of the ſide or near the edge, the better it is, as there will be the fewer gaps, and the neceſſity will be obviated of having (what the Printers call) a liſt to make up the deficiency, and leſs will be cut to waſte in the making of it up.

This rule, however, ſhould not be ſo ſtrictly adhered to as to make the joinings too nice, by cutting ſtraight through every thing, or particularly through a number of objects; for the more they can be preſerved intire, the leſs injury is done to the pattern, as the print being pitched too

Digitized by Google

too high or too low, or too close or slack, renders them all unshapeable; it is likewise better to keep them whole on account of the grounds, especially the grass ones, as they by being disjointed must add to the bad shape of the objects; but, as it may happen that the breaking of the objects is of little consequence from their shape or situation, or that the ground-work may be of more consequence to preserve; the above observation must be regulated by attending to what are the characteristic parts of the pattern, or what first catches the sight, and these must suffer the least possible injury, whatever may be the fate of the subordinate parts.

---

12. If some part of the pattern be coarse or have a body, it will not allow the fine parts to be so close or so fine as they otherwise might be, as the quantity of colour requisite to supply the solid parts will choak up those that are close, or cause those to work coarsely that are fine; and here it may again be observed, that though neat drawing on is to be commended, yet, if not drawn sufficiently open or clear, where for instance, there may be shades or shapes as fig. 13, 14, and 15; though cut by the best cutter, and may appear tolerably

Digitized by Google

tolerably open and fair on the block, they will not appear ſo in the impreſſion, to ſay nothing how they may ſuffer from a bad cutter or printer, or from being printed on coarſe cloth, or when half worked out; for a print ſhould be calculated to work decently when a certain quantity of work generally expected to be executed by one is nearly compleated, and therefore (to give ſome inſtances) in drawing or cutting ſhades as fig. 16, 17, it is not adviſeable to put them on in that manner, however graceful they may appear on the block or even in the cutting, becauſe the colour will hang in the corners and give the work a clumſy appearance, hence to cut them with leſs of a curve as fig. 18, 19, they will, by working clearer and neater, amply compenſate for ſuch a deviation.

---

13. Avoid, if you can, having any part of a cloſe trail as in fig. 20, at the head of a print, as the preſſure from the pitching of the print will render it coarſer than any other part of the trail: the preſſure however may poſſibly be prevented by the pitch pins ſtanding out farther than common from the work: for which preventative ſee the rules for making pitches.

When

Digitized by Google

14. When you have ſhades, as fig. 21, or particularly lights ſtanding or running with the grain as fig. 22, 23, be careful to have them cut ſufficiently open, otherwiſe you will be deceived by their working cloſer than intended; for when a print gets moiſt, the opening cloſes conſiderably, and what may have appeared open in putting on, or when cut, will be choaked up in the printing, eſpecially if cut with a thick knife, or if not ſufficiently cleared at the bottom and ſides.--- See more reſpecting this article in Rule 6, for cutting.

15. In joinings either at the head or ſide, the more a ſtalk or trail joins in this upright direction fig. 24, the better it is for working, inſtead of joining fig. 25, as the beſt Printer cannot at all times, on account of the varying of the cloth, keep the joinings ſo well in command at the ſide as he can at the head.

16. In drawing leaves or ſharp-angled objects that are to be pencilled, it is recommended to terminate them as fig. 26, 27, or fig. 28, inſtead of fig. 29, 30, 31, as ſuch a finiſh will keep the penciling, particularly the blue colour, on account of its thickneſs, from being run into

Digitized by Google

the white, or the ground; for without such a filling up of the ends, the pencillers will either leave a light at the corners, as fig. 31, or, in endeavouring to fill them up, they will be apt, from the largeness of their pencils, to come over the line, as fig. 32, and the same observation will hold good respecting every other place where the pencilling goes into corners or angles.*

Note. In calculating the expence of pencilling, and thereby fixing what quantity should be in a Pattern, a certain number of strokes or dashes, which a Penciller is supposed to make in a stated time, is worth a certain price.

---

17. In putting on the block, nothing is more deceptive than having to leave lights in dark grounds; for if any shape is drawn fig. 33, you may be deceived when the ground is filled up, as it takes in the line you have drawn, and makes the light within-side appear less; it is still more deceiving if you have to draw the boundage as fig. 34, as its thickness gives the whole object a larger appearance than it really has. Here it may be noticed (though touched on before) in putting on

* An imperfection of this kind runs nearly all through the work of one of the first Printers about town.---This, with similar observations will be enlarged on, in the progress of this work.

Digitized by Google

on a print that is to have a thick boundage, ſee fig. 35, particularly if it is to be a doppy, that the ſhades and other work within ſide ſee fig. 36, muſt be kept ſufficiently clear and open; or the weight of colour requiſite to furniſh the boundage, or doppy, will be too much for ſuch cloſe ſhades or fine work. Obſerve likewiſe if there be lights as fig. 37, to give intimation to the Cutter to ſtrike the ends with a ſmall gouge, as fig. 38, which will prevent the colour from hanging in thoſe otherwiſe ſharp ends.

---

18. In drawing on grounds that have large bodies as fig. 39, that are to work in thin colour, eſpecially if they ſtand wide apart, remember that they will in the working, from the ſinking or ſpreading of the colour, and its adherence to the ſides, make larger impreſſions than the ſurface of the cutting otherwiſe would; hence they ſhould be proportioned to that circumſtance, and put on perhaps ſmaller than they are in the pattern. And as the pale colours worked with ſuch ſolids, will be loſt, or appear much paler when impreſſed from fine lines or pins if on the ſame block; therefore in ſuch caſes ſeparate

Digitized by Google

grounds ſhould be had for the fine parts or for the pins.

Under this head would be conſidered the drawing on blotch grounds, and the other grounds that fall into boundages, but as the cutting farther or leſs into the boundage is partly regulated by the thickneſs of it; no preciſe direction can be given, as every one knows the circumſtance to be attended to, in this caſe, is to prevent any light edges from appearing either within or without the boundage.---See more to this purpoſe Rule 7, under the article Cutting.

---

19. Wherever there are to be pins, mark them on the block previous to its going into the Cutter's hands, that the wood be not chiſſelled away, and where the pins touch or join the cutting, mark them accurately, and give intimation to the Cutter, that the ends of the ſhades or ſtalks may be cut downright, otherwiſe a diſagreeable gap will be left, as fig. 43; and in aſcertaining the ſizes of pins, be aware that as the wood gets coarſe by working, the pins ſink in, from the repeated blows at the back; and if worked in colour that has any corroſive quality in it, they ſoon get finer; hence if proviſion is not made for theſe circumſtances, the impreſſion of the wood

Digitized by Google

wood and pins will in a little time be very disproportioned. It is likewiſe needful to inform the Cutter of what quality the pins are to be, that the depth of the chiſſelling may be regulated accordingly.

---

20. In ruling Bengals the following mode is recommended, in order to make the ends join each other, (provided the block has not been too much warped, or any particular accident happened.)

Make *on a ſlip* of thick paper, or rather thin lead, *with* which tea-cheſts are lined, as many diviſions as you have Bengals to put on, then fixing it to the ſquare line at one end, prick through the diviſions on the paper, and transfer them to the block, the finer the pricked holes the better; having done this, remove the ſlip carefully to the ſquare line at the other end, taking care that the two extreme holes anſwer to the corners of the ſquare, and prick through the ſame diviſions as you did before; then rule as uſual from the pricked marks, thus will each end of your ſquare be a correct copy of the other; but as the ends of Bengals are of moſt conſequence to preſerve, it may not be amiſs with a ſharp thin blade, to cut a little into the wood at each end.

Digitized by Google

21. If it be a joined block that you uſe, take care that the joint comes between the Bengals, and as a preventative againſt the conſequences of a print with Bengals warping under the Cutter's hands, it may be neceſſary to let one end of the Bengals be cut thicker than the other; ſee fig. 44, and make the ends join by cutting away from the broad ones, when the print goes to work; or whenever Bengals do not pitch to themſelves, that is, when they join by pitch-pins, it may be uſeful to cut both ends, as fig. 45, and in the joining let the points run into each other, as you thereby prevent the diſagreeable appearance that the junction has when two ſquare ends join badly, as fig. 46, but in the other inſtance, at the worſt, they will appear as fig. 47, which is conſiderably better.

22. When you have a number of ſet objects, ſuch as roſettes, rings, leaves, &c. to put on, it being very difficult, if not impoſſible, to trace or draw them alike in the uſual way, it is beſt to have the objects cut accurately, and impreſſed or printed on the block, which if you can do clear enough

Digitized by Google

enough to cut from, it will ſave much time and labour; or if you cannot do it ſo ſmartly as you wiſh, make a mixture of lamp black and flake white, ſo as to be about the hue of black lead, the paler the colour the better, and let there be little, if any, gum in it; ſpread this pretty thinly on a piece of ſoft leather, and ſo take off your impreſſions on the block, which done, draw over the objects, ſo printed, with well-tempered carmine (ſome add gum bogia) and when finiſhed clear away as much as you can of the colour you printed on, with a piece of ſtale bread; for if you uſe India rubber, it will change any colour which has gum bogia in it, to a very dark and dirty one.

Another method is by printing your object on paper with a proper mixture of carmine and treacle, which a little practice will aſcertain, and then rub it off from the paper on to the block; the advantage of which mode is, that the colour does not ſpeedily dry, ſo that you may take what time you pleaſe in rubbing it on; but the neateſt method is by the object being engraved, and then taken off on paper, either by hand or a preſs, in the red oil colour that is uſed in the printing

Digitized by Google

printing on paper; which not ſpeedily drying any more than the treacle colour, it may be rubbed on the ſame manner.

Other methods of a ſimilar kind for another purpoſe, are propoſed further on.

---

23. If for any particular purpoſe you want to fix your colour on the wood, a thin white tranſparent varniſh will ſecure it; or if you uſe a black lead pencil only, ſtrew ſome powdered roſin all over, and then move a hot iron about at a little diſtance over it, by which method the roſin will liquidate and form a kind of varniſh over it; or what is ſtill more ſimple, if you only draw your tongue wet with ſaliva, over a black-lead drawing, and let it dry, the black lead cannot be eaſily removed.

---

24. When you have a pattern to put on, conſiſting of very ſmall objects, very cloſely and promiſcuouſly ſituated, an eligible way to preſerve an even face, is to take a ſmall portion of the ſquare of the block (in ſome caſes half an inch will do) and ſee how many objects will go in it, and then repeat this portion on another paper, to what ſize you pleaſe; varying the diſpoſition of the objects as much as the pattern will admit, in order to prevent the appearance of a repetition.

Note, Small cloſe patterns will well bear enlarging a little, elſe on the cloth they appear ſmaller and cloſer.

Digitized by Google

25. As circles, roſettes, and other common objects, are always in uſe, it would not be amiſs to have punches of different ſorts and ſizes, to uſe occaſionally on paper or blocks, particularly where the objects are on dark grounds, as fig. 48, or have a thick boundage, as fig. 49, as the object impreſſed on the wood will be viſible to cut or gouge from; or if the impreſſions ſuffer from damping, they may be drawn over in red, and thus from their accuracy much trouble would be ſaved; or if you want a ſolid object repeated accurately, it may be managed by ſtenſelling it, that is, by an object as fig. 50, cut out of a piece of oil-ſkin, a piece of thick paper rubbed over with bees wax, or a piece of thin ſheet lead, and then lay the colour on with a pad, or in what other manner you find convenient; or if you want to do ſomething like fig. 51, it may be managed by cutting out the object nearly all round, as fig. 52, leaving juſt joining enough to prevent the inner piece from falling out, the impreſſion of courſe will be imperfect as fig. 53, which imperfection muſt be made good by the pencil.

26. A

Digitized by Google

26. As ſometimes on emergency things cannot be got on too ſoon, you may, after having put on the print, trace the ſame accurately with a firm oiled paper, and then retrace it on another block, or at leaſt thoſe parts that the ground which you mean to put on, falls into, or joins; on which accordingly draw your grounds; but ſtrict charge muſt be given to the cutter that he does not deviate in the leaſt from the drawing.

The advantage of this mode is evident, in having the principal grounds ready as ſoon as the print; and if they do not exactly fit, perhaps a little alteration may make them; and that is better than ſetting ſome prints to work before the grounds are cut, as then whatever is amiſs in the impreſſion of the print, muſt remain ſo.

It is however ſuggeſted concerning this article and the preceding one, that they ſhould only be uſed in caſes of abſolute neceſſity, as their neatneſs and accuracy cannot be much inſiſted on.

In fact, every one muſt grant that any operation, eſpecially where contrivance is neceſſary, and has to go through many hands, if executed with precipitancy, cannot reaſonably be expected to be free from ſome fault or other; and in this inſtance it moſt undoubtedly is requiſite, that, with very few exceptions, prints and grounds ſhould be adjuſted to each other before they go to work.

Digitized by Google

27. In finiſhing the joinings of ſome certain prints it will do no harm, to let the ends of ſtalks or objects, that join at the heads and ſides, be a little too long, it being an eaſy matter to pare or cut away what is ſuperfluous; or ſometimes if particular parts of a joining are ſuffered to remain rather longer than might ſeem needful, as fig. 54; they prevent the appearance of a break in the ſtalk, ſee fig. 55, 56, 57, if the print is ſlackly joined.

28. Avoid ſo diſpoſing of a leaf, a flower, or ſeveral ſtalks at the corners of a print, as to require four joinings to bring them together, ſee fig. 58, 59, 60, but, if poſſible, let the corners of the ſquare fall in ſome open or blank part of the pattern, as the joinings are leſs likely to be perfect at the corners than any where elſe.

The above rule, it may be obſerved, chiefly reſpects patterns where the work is cloſe, or the objects ſmall; as in looſe patterns, or where the

Digitized by Google

objects are large, and light of work, it may not be of much consequence where the joinings are made.

N. B. In joinings it is perhaps best not to give much latitude to Printers, as it thereby makes some of them more careful in the joining, and rarely satisfy them how the grass grounds fall; for if they know they may run their joinings a little, they will be apt to over-run that latitude; It is however necessary to inform them what work is to be grounded, that they may be accordingly careful in pulling over their pieces, and folding them smoothly and even. The Foreman of a shop should be informed of the design of every pattern.

---

29. Instead of the common way of making out the joinings, by rubbing off from black lead, or by an oiled paper, the following mode is offered where particular nicety is required, at least it must be something more certain, from the circumstance of one side and end being cut, than the usual mode, as there is always a probability of the Cutter deviating from the drawing, or the marking out of the joinings.

After

Digitized by Google

After having regulated your joinings, draw or finish one end and one side, as you mean it be joined to the others, leaving the other end and side unfinished, at least within a quarter of an inch, or perhaps less, where the joinings are to be made; then let the end and side that you have drawn perfect, be cut a little way in the work, and likewise the squares; then dab a little treacle and lamp-black on the edge of the part that is cut, and lay over it a slip of strong paper, and press it sufficiently to receive an impression, taking care that you take the *impression* of the squares, unless you chuse to prick through the two corners, for the purpose of transferring them to the other; either way remove the paper carefully to the other side or end, by joining the squares that you have rubbed off, to the other squares, or fixing the pricked holes to them: then rub the impression which you have received from the end or side which you have cut, which will convey it to the block, to which impression you accordingly have to make good the drawing for the joinings. ---In some cases it may be more convenient to let the print be cut all over to within a very little of one of the sides and ends, observing the same process of rubbing, as before suggested. Or,

by

by putting temporary pitches at a diſtance from the ſquare, at the bottom and off-ſide, and having holes or pins to anſwer to them, within the ſquares, and at the ſame diſtance from them, if you ſtrike an impreſſion on paper, and then join it, (obſerving to guard the blank part of the block from the dipping) you will have at once the impreſſion of that part of the block which is cut, and by which you may the eaſier regulate the joinings.

---

30. In prints with ſprigs that ſtand wide apart, or in very looſe trails, if it can be done without hurting the ground, a few pins placed between, and filed nearly to a point, and rather below the ſurface of the wood, will keep the cloth down; and cauſe the work to appear neater, by preventing the edges of the objects preſſing too much on the cloth; it likewiſe anſwers the purpoſe of keeping the ſubſtance of the block nearly equal, as otherwiſe a deal of wood muſt be hand-tooled out; and the hollows that remain muſt weaken the block, and render it more apt to warp, or perhaps ſplit, if the print requires much knocking. In grounds where the parts ſtand far from each other, it can be done very conveniently, by letting theſe (what may be called) guard

Digitized by Google

guard pins, fall into parts of the impreſſion of the print.

It is granted that an objection lies againſt this obſervation, as the points of pins ſtanding at great diſtances from each other, are apt to make holes in the ſieve, or in the cloth, eſpecially where coarſe or too much blanketing is uſed on the table; and if one thread of the piece is broken, it will in the proceſs of copper or field-work become a hole; therefore ſome caution is needful in this caſe to place the pins, not too far from the work, eſpecially round the outſide of it, ſo that the circumſtance alluded to be prevented.

---

31. Where a print or ground is put on without any drawing, ſuch as rings, bengals, that are executed with dividers, tracers, &c. ſo that only an indenting is made in the wood, if a thin mixture of colour be ſpread all over, and the block afterwards ſcraped with a fine edge, ſome of the colour will remain in the indentings or hollows, and be tolerably viſible; beſides, by purſuing this method, if the wood be damped, and the indentings ſwelled up, there will ſtill be

Digitized by Google

be ſome guide to the Cutter; in ſhort, it will have nearly the ſame effect as oiling the wood where a curf line is cut.

---

32. In drawing for pinning, be aware that though in the drawing, your lines may appear to ſtand diſtinct as fig. 61, 62, 63, yet the print when pinned will not have that appearance, the certain vacancy between the pins deſtroying it, as the pins will appear as fig. 64, 65, 66. Obſerve the ſame in drawing lights in bodies of pins, as fig. 67, for though the object may appear tolerably ſhapeable, while only as a line, yet it will be deſtroyed when encloſed in pins as fig. 68, therefore in ſuch caſes, let there be a proper openeſs obſerved or provided for.

---

33. In drawing pinwork for cylinders, recollect that there will be ſome difference between the width of the ſurface of the pins, and the bottom of them which in rings, roſettes, &c. will be of ſome conſequence.

Digitized by Google

34. In adjusting the joinings and pitches, it may not be amiss, indeed it is necessary, if there be among the Printers, one who has a general judgment, to consult with him respecting them.

35. Though the following observation more concerns the designer, yet as the putter-on is sometimes left to his discretion, it is intimated here that pin shapes for leaves are bad for pencilling two colours, viz. the blue over yellow, or yellow over blue, as the blue and yellow are never so exactly on each other but that they are seen at the edges; and so likewise are the edges of leaves or other objects of this kind, fig. 106* of

* This kind of refinement is what the writer several times points out as objectionable in the patterns as executed on the cloth by some of the first Printers; in one ground, almost all the leaves (as mentioned already) are of that long shape, fig. 110, so as to heighten the inconvenience when form'd with pins; and in another, (perhaps the first in this country, for the variety of patterns it has produced, and the taste displayed in them] those leaves fig. 111, are very frequent: but the ill effect is at all times visible, though the pencilling is as neat as can possibly be done here; therefore the drawing on paper should be regulated in a degree by the similitude that is attainable on the cloth; and, according to the principle of keeping the last stage in view, a little deviation had better be made from the original, though in respect to itself not bettering the appearance, provided it tends to give the whole a better aspect; and particularly so, if it renders the operations easier, or more facile, in any of the branches.

Digitized by Google

and of pin ſhapes, thoſe are the worſt that are in this form fig. 107 on account of the ſharp end; but, if ſuch ſhapes muſt be retained, it is adviſed to end them thus fig. 108. Beſides, there is another inconvenience attending pin ſhapes, indeed a general one, which is, that the ſurfaces of the pins continually get finer; hence, if not put in as cloſe as poſſible to each other, or if put in of the ſmalleſt ſizes, (ſpeaking of them as boundages for colour) there ſoon will be very little line to be ſeen; and every one knows pumicing them muſt render the wood-work coarſer; and it may be ſaid too of this kind of ſhapes, fig. 109, that a ſmall accident or little violence ſoon breaks them; or if the texture of the wood be not very firm indeed, they ſoon crumble away, or work gouty.

36. Obſerve as a general rule, that pins and wood never work well together, eſpecially large pins with fine cutting, or fine pins with coarſe cutting, and particularly where they ſtand cloſe to the wood. — See Rule 19.

37. In drawing on grounds that are to work in thin colour, if they have ſhades, or other long and thin ſhapes, terminating in points, remember that ſuch long ſhades do not ſhew as ſuch, even if very wide apart; and if put cloſe together, they blotch up; therefore in many inſtances they ſhould be drawn rather longer than apparently needful, and the Cutter muſt be directed to croſs the ends with his knife.

Digitized by Google

Of Pitches.

IN the firſt place it can never do any injury always to have ſquares cut at the corners, and oftentimes in the middle, both of ends and ſides, the neceſſity of which the nature of the pattern will determine; but at any rate (as above ſaid) they are needful at the corners, as they determine when you join the print by them, whether the pitch-pins are on the ſquare or not; and that you may the better join the print by the ſquares, let the ſhape of them be as fig. 69, or rather as fig. 70, to hinder the clogging of the colour in the corners, unleſs the ſituation of the work hinders their being ſo cut, and let them ſtand out as far at leaſt as the pitch-pins; becauſe in the firſt trial of the joinings (ſuppoſing the ſquares are cut as they ſhould be) the print may be joined by them, as the pins may be then adjuſted, if not put in right, or if moved by any accident.

If it were not for the conveniency of joining by the ſquares, inſtead of the ſhape above recommended, it would be beſt to cut them as at fig. 71;

Digitized by Google

71 ; but however, when they are cut as fig. 72. (for as fig. 73 they never ſhould, though too commonly done ſo, as the impreſſion gives no certain ſhape) they ſhould not be drawn on the ruled line, as the ruling will perhaps miſguide the cutting of them ; and if the ſquares are left for the purpoſe of ruling grounds from, they ſhould be drawn within the ſquare line.

---

2. At the head the pitches ſhould ſtand out from the work near one quarter of an inch, that the wood may not preſs on the cloth in pitching the head of the print, and of courſe appear heavier than the reſt of the work.

The firſt pin at the head ſhould be at leaſt one quarter of an inch within the ſquare line of the near ſide, for fear of the near edge running on the table ; the ſecond pin, for the convenience of the off-edge printing, ſhould be regulated according to the width of the print, and of the cloth it is likely to work on ; for if the width of the print is ſuch, that the edging is leſs than half that width ; which by the way is a bad circumſtance for the face of the print (as obſerved already) there is no occaſion for a middle pitch, either

Digitized by Google

either for print or grounds; and the fewer pins for pitches is always the better; for if the firſt pitch ſhould get off the near edge, the Printer, for the ſake of the grounding, muſt get on again if he even makes a cut: as for the third or off pin, it is little matter how near the off-ſquare it is, ſo it does not ſtand out beyond the line of the work on the off-edge, as it then would be particularly liable to accidents.

---

3. As the pitches of the print, from their outward ſituation, are in danger of being removed or otherwiſe injured, it ſhould be a rule to put ſtout pieces of wire deep in the wood, rather ſlanting, and leſſen the tops with a file or other inſtrument; and in caſe the print ſhould run on the table, it would not be amiſs, eſpecially if it be a cloſe one, to put pins at the off-edge, unleſs the ſhape of the work will anſwer the purpoſe, to fall into certain places, in order to fill up the vacancy, if there be any of conſequence, at the near edge. Likewiſe for fear the print ſhould come off the near edge, and of courſe the ſide pitches for the grounds be rendered

uſeleſs:

Digitized by Google

uſeleſs: let there be a pin at the bottom of the ground to fall into the work, if it can be ſo managed, at the bottom of the print.

4. The firſt ſide pitch ſhould be about half an inch down the ſide, the other as near the bottom as convenient, and if it can be done, let them pitch into objects ſo that they be little ſeen, taking care however that the joining of the print does not obſcure them. Side-pitches need not be out farther than juſt to be clear of the work; in order to prevent a light edging.

5. The pitches for the print being aſcertained, put in the pitches for the grounds which work next in ſucceſſion; theſe muſt be diſtinct from the pitches of the print, and be clear when the print is joined; one pin towards the bottom of the near ſide is ſufficient for the ground, taking care to place it below the ſide pitch of the print, that it may not hinder the printer from ſeeing his print pitch; this however is not neceſſary to be particular about when the ground pitch is placed within

Digitized by Google

within the work: Endeavour likewiſe at all times to make one pitch or a ſhape do for as many grounds as you can, obſerving however, that a ground that works to another ground ought not to pitch to the print.

6. If the work is to be grounded after it comes off the graſs (as you can make no alteration then) be particularly careful that the pitches for thoſe grounds be not obſcured by any means, and if you can place them where pale colour only will cover them, it will be the better, as that will partly hide them; and let them be but juſt large enough to be ſeen, which rule indeed ſhould be carefully obſerved in reſpect to pitches in general, or if large pins are put in, the tops ſhould be leſſened.

7. To be more certain of having your pitch pins in their proper places, they had better be put in before prints or grounds are given to be cut (unleſs you have no doubt of the carefulneſs of the cutter, in that reſpect) and before your prints or ſome

Digitized by Google

ſome certain grounds go out, be ſure to rub off parts of the drawing on paper, making a memorandum what parts you rub them from, as they will be checks againſt the cutter in proving whether he has or has not deviated from the drawing, and probably prevent a deal of altercation, when the work is done; or, as a further caution,* the whole face-joinings and all may be procured, by damping a ſtout piece of paper, laying it on the ſurface and gently rubbing the back, till you have a ſlight counterpart of the drawing; and a very ſlight one will be ſufficient to ſhew the trail, or the ſhape and ſituation of flowers, and other objects.

A Putter-on

---

* For if a Cutter has a pique againſt the Drawer, or bears ill-will to the maſter, or if only through wantonneſs he may alter the joinings, the direction of a ſtalk, or ſhape of an object, or in grounds, he may cut out of ſhape, or move an object out of its place (for ſuch things have been done) and then, without ſome check, what can the Putter-on ſay in excuſe, or how clear himſelf.

Digitized by Google

A Putter-on, and indeed any other perſon, is likewiſe here adviſed for his own ſake, to make minutes of what may have been matter of opinion or contention between his employer and himſelf, about the mode of performing any thing, when his Employer or Principal has it done his way; and have thoſe minutes ready to produce, if, in conſequence of ſuch determination, the effect happens not to be as it ſhould, or if the performance be not ſucceſsful in other reſpects.

As well as adviſing a Putter-on to be guarded againſt the Cutter, the writer adviſes the Cutter to be on his guard, and that is, to ſee the rubbing-off performed, and that his employer keep one in his poſſeſſion; or elſe to demand one for himſelf, otherwiſe it is poſſible the putter-on in his way, may do a Cutter an injury, by altering the rubbing off in ſome mode or other, and thus make it appear as if the Cutter had not attended to the drawing or other particulars.

The

Digitized by Google

The writer is of opinion, that a putter-on at ſhop, is not amenable in general, for what cutting may be faulty, when brought home; nor can be with propriety be aſked, if he put the whole or any part of it on, in this or that manner; for to ſay he did not, if the cutting be faulty, is criminating the Cutter, even if he has his checks by him; and to ſay he himſelf was in fault, every one knows is aukward enough; as in this caſe the putting-on ſhould have been examined, and if faulty in any ſhape, rectified, ere it went out; for to let putting-on go out in ſuch a ſtate, implies incapability or careleſsneſs in the Principal, or any other who may have to ſuperintend ſuch matters.

Digitized by Google

Of Squaring Blocks.

IN making a ſquare (as it is always called) though the four ſides are ſeldom equal, if a print is intended to be a 5 over on 5-4th cloth, or about 7 3-8ths wide, it ſhould not be above nine inches long, it being handier for working, and not ſo apt to warp, as if longer in proportion to that width, and for very cloſe fine prints that are difficult to join, the ſmaller they are the better, as they have leſs cutting, are eaſier to work, the warping is not of ſuch conſequence, and the grounds are more likely to be hit in, eſpecially the graſs grounds, and the beſt general ſize for them is about 8 by 6 and a quarter, or 6 and a half at the utmoſt, or what is called a ſix over, for to make it any thing wider under 7 3-8ths, ſo much cutting would be thrown away; as it would ſtill be ſix over, and the worſe for it, it then having to work a narrow edging on the off ſide, the inconvenience of which has been amply diſcuſſed.

Digitized by Google

2. For larger prints it is presumed the best general sizes are, for 4 overs about 12 by 9 and a half, for 3 overs 15 or 15 and a half by 13, but when a pattern requires a pair of prints or more, the length and width must be governed by the nature of the design; if not drawn to any particular size, unless the pattern would not be injured by altering it.

NOTE, In speaking here of 5 overs and 6 overs it must be understood (as before remarked) as referring to ell-wide cloths; though after all, (as likewise remarked) the best rule to abide by, is knowing what cloth is most likely to be made use of for the respective patterns that are determined on. The sizes however as above will nearly suit narrows, with one more over.

This circumstance of determining on the sizes of prints, is of consequence from other motives; for to have a print unnecessarily small (which is the case if the work be light and easy to join) is protracting the working of it, and encreasing the expence attending its working, if on account of its smallness, the Printer requires a proportionable price; besides, such a print will be as much worn in doing a hundred pieces as, if made a little larger, it would be in doing twenty or thirty more; which altogether is of some importance,

Digitized by Google

portance, and muſt conſiderably outweigh the circumſtance of its having coſt leſs for cutting, if that had been an inducement to have had it cut ſo ſmall.

It is however as neceſſary to conſider what it may have to do in reſpect to grounding, particularly graſs-work; hence if the ſize is ſuch that the grounds cannot be worked whole, the print in this caſe had better have been ſmaller, and this circumſtance is determinable by the eaſe or difficulty of the grounding, for if the grounds are to fall into ſmall objects or fine lines, the print ſhould be ſmall, or if it be larger the grounds muſt work in halves, unleſs there is good latitude for the grounds to fall, and then they may work whole with ſuch a print.

---

3. In ſquaring a block the moſt expeditious and certain method, as well as of making the diviſions, (if they are required) is to have a plate of copper or pewter, ſet out with a number of ſquares within each other, of the different ſizes above-mentioned for 6-overs, 5-overs, and 4-overs, as being moſt generally in uſe; and ſet into as many diviſions as you chuſe, and at the

Digitized by Google

corners of each ſquare, and wherever the diviſions are marked, let there be holes pierced through, as fine and as ſtrait as poſſible; you have then only to lay your plate on a block or paper, and with a fine needle prick through the holes where neceſſary, and then rule as uſual from the pricked holes left on.

---

4. Another method is, by having a piece of thin wood or metal, made angular as fig. 74, which laying on a block or paper, rule two lines fig. 75, and then with your compaſſes or dividers (beam compaſſes fig. 76 are beſt) extended to the length of your print, fix one point at A, and make with the other a hole or curve at B, then put one point on the line as far diſtant from A, as, near as you can judge, what the width of your print is, and ſtrike a curve as as D, this done, rule a line from the bottom of the curve to B, fig. 77, then move your dividers to the width of your print, put one point at A, and ſtrike a curve as at F, and with the point at B, make another curve, interſecting that at D; laſtly, rule from the interſection to F, fig. 78, and you have your ſquare.

But

Digitized by Google

But obſerve, that the truth of your ſquari in this manner, depends on the juſt form of the two ſides, from which you firſt rule, and of the inſtrument which you uſe.

This inſtrument, or the copper or pewter plate firſt ſpoken of, if it be cut perfectly on the ſquare, will ſerve to try whether pitches ſtand ſquare or not, by laying it to one of the ends and one of the ſides at the ſame time, and repeating the trial at the other end and ſide.

---

5. *If* you ſquare your block in the uſual way, and have occaſion to make diviſions, divide into halves firſt; then divide thoſe halves; then divide thoſe quarters, and ſo on; inſtead of taking a certain part, and running the dividers along the line, becauſe of the great probability that the ſame number of diviſions run along in the ſame manner, will not form the ſame length exactly again.

---

6. In ſquaring a block for a ſtripe pattern, if it be on a joined face, take care that the joint is parallel to the ſide of the ſquare, and (if it can be

Digitized by Google

be ſo) in the moſt vacant place: to get it parallel to the ſquare line, you have only to put one point of your compaſſes on the joint at one end of the block, and with the other make a hole or curve near the edge of the block, from which you mean to raiſe your ſquare; repeat the ſame at the other end, and from the two pricked holes or curves, rule the line which is to be that from which you raiſe the ſquare. This obſervation ſhould be attended to in ſprig patterns, or any other where the joint can be poſſibly avoided.

Digitized by Google

Of Cutting.

AS a Drawer, or Putter-on, ſhould ſtudy how to preſerve the effect of a pattern before he puts it on, a Cutter ſhould endeavour to preſerve the effect intended; and if he has the intereſt of his employer in view, as well as his own, he will examine as far as his judgment lies, where it is defective, or any way improper, and not, as is too generally the caſe, think only of contriving how to make the charge as high as he can, (if the price be not agreed on before-hand) to ſuch it may be hinted, they are ultimately not gainers, for it may be expected every employer will think firſt of thoſe who think of his intereſt as well as their own immediate emolument.

From what is above ſuggeſted, a Cutter is not to infer that he is at liberty to alter the drawing or deviate from it as he pleaſes, beſides, he ſhould be very cautious in that reſpect, as he may not be aware what counterparts or checks are kept againſt him.

A Cutter likewiſe ſhould conſider when he takes any work whether he can do it well, if the putting on, or more properly the drawing, be indifferent, becauſe if he does not execute it tolerably and alledges in excuſe, it was badly drawn: It is the more inexcuſable in him, as undertaking to execute what he knew he could not do as it ſhould be; as among other reaſons, it muſt go to

Digitized by Google

work bad as it may be (unleſs it be too bad) from the impoſſibility of its being put on and cut over again in proper time. But much worſe it muſt be in him who will proceed on his work, though it is evident to him, that from ſome miſtake in inaccuracy, the article muſt be uſeleſs to all intents. *

As a general obſervation reſpecting cutting, be it noted that the principle of ſound and graceful cutting (if the term may be allowed) depends on properly forming the knife, and having a good command of it; as for the ſhifts of pinking, and other expeditious modes made uſe of as ſubſtitutes for cutting, the face, from being forced or ſhattered by ſuch modes, rarely works clean or ſtands well; and by thoſe who require ſound cutting, the uſe of ſuch modes ſhould be exploded, as more proper for carving; but in cutting for callico-printing (it is repeated) the knife, and that alone, can make a proper face, where ſtrength and neatneſs is required to be combined.

* Sorry the Writer is to ſay that either through pique to the drawer, enmity to the maſter, or from that wretched groveling principle of ſuch miſchances multiplying work, he has known it to be the caſe, and he is not backward to own in caſes where he has blundered, or not been ſufficiently accurate (for he don't pretend to infallibility though he preſumes to publiſh this work) he has experienced inſtances of ſuch a kind.

Digitized by Google

Rules for Cutting.

1. A careful Cutter will at firſt look at the joinings and meaſure and compare the diſtances of the pitch pins, and if the pitch pins are only marked, he will be careful to put them in as ſoon as poſſible, as the deferring of it till the marks are ſo faint, that they are almoſt put in by gueſs, is productive of much trouble, for even the common practice of drilling or goudging for them, chiſſeling the wood away, and then driving in the pins is deceptive, the tops of the pins frequently not being where they ought to be.

If however the Cutter puts in the pitch pins he ſhould not chiſſel the wood away till the reſt of the print is finiſhed, or if it is cut at home the wood ſhould not be cleared away till it is taken to ſhop or ſome other proper place, as they might be removed even in carrying thither.

2. Le

Digitized by Google

2. Let the difference between the ſurface and bottom of the work be juſt ſo much as will ſerve as a foundation for it, as every cutter ſhould be aware, that if thicker, the print will work the coarſer, even if the ſurface be fine, and the firſt time it is pumiced it will work very clumſily; as for the care of preſerving a face, every tyro in cutting muſt know that is of the firſt concern, and of courſe the cutting of it away in any part, or leaving ſo little foundation that it is liable to be injured by the ſmalleſt accident, is the greateſt diſcredit to a profeſſed Cutter that can be.

3. Next to a proper foundation and an even face, a ſound print is one where the work is not cut through, at the joinings of branches or ſhades ſee fig. 79, for where the knife goes thro' thoſe joinings, eſpecially if it be a thick one, or the wood very damp, it will eaſily be ſeen, after the print has been ſometime at work, and lays in a warm

Digitized by Google

warm or dry place; but as in ſome inſtances it is impoſſible to cut in that manner, proper attention ſhould be beſtowed on thoſe parts that are left without the ſupport alluded to, that they have a firm foundation, otherwiſe the ſlighteſt accident will remove them.

---

4. Where pins are marked to touch the ſurface of the wood as fig 80, cut accordingly, that is, down right acroſs the end, or it will be the cauſe of much trouble both in drawing for the pinning and in the pinning itſelf, from the pins not being able to ſtand upright, nor join with the ſurface of the wood; but will leave diſagreeable gaps as fig. 81, between the impreſſion of the wood and pins; and if the pins are marked to ſtand near a line as fig. 82, carefully cut more upright than in general on the ſide the pins are to be, and cut deep or ſhallow according to the ſize of them.

---

5. Where pins are marked and have no cutting near them, leave ſome wood for the file to reſt on.

5. If

Digitized by Google

6. If you have to cut a curf as fig. 83, cut outſide the line as drawn (unleſs the putter on has provided for the circumſtance) otherwiſe the line of pins cannot be where they were intended, for the drawing being the line that the pins is to ſtand in, if you cut the curf through that drawing, it is evident the pinning muſt be within ſide of that line, becauſe of the wood, as fig. 84.

In cutting lights with the grain, be cautious to cut with a thin knife, and rather ſlanting, whether you chiſſel away or not, or when the work is damp the wood will cloſe in ſome degree, and of courſe appear in the impreſſion not ſo open as thoſe lights which are cut acroſs the grain, tho in the cutting they were full as open.

It ſeems to the Writer, that in cutting fine lights with the grain, it is not the beſt way to cut downright of each ſide, and chiſſel away at the bottom, particularly if the wood be very dry or ſcarcely damp when cut, as the ſurface will nearly cloſe when the wood gets damp, but rather to cut very deeply and take the wood out with the knife, for each ſide riſing ſlopingly from the bottom, the chance of the two edges of the ſurface

Digitized by Google

face meeting together is not ſo great; but as a counter-balance, the colour is more apt to gather than when cleared at the bottom with the chiſſel, therefore if cut ſlantingly and chiſſeled away with a very ſmall tool, that inconvenience will be prevented.

---

7. Cutters are not ſometimes aware how much they injure a block by extreme partial damping or letting it lay a long time on damp ſtones or bricks, eſpecially if one end is kept damper than the other a long while, as the face is liable to come up in places by damping or wetting while there is nothing but the glue to hold it; and as blocks are ſometimes badly venered, or may have lain long in improper places, or may have ſuffered by a removal from a damp place to a warm one and the contrary, there is the greater reaſon for a Cutter to be cautious in that reſpect, hence it would not be amiſs as a Cutter clears away, or as ſoon as finiſhed, if he ſecured the face by a few brads.

Note, The Writer purpoſely inſerts the following article, though properly belonging to putting on, in order to lead a Cutter to look a little further than the point of his knife.

8. If

Digitized by Google

8. If you have to cut from an impreſſion always be informed whether the cutring is to be within the line, on it, or without it: as this circumſtance is very often a mere matter of opinion, though at other times determinable by particular circumſtances. See Rule 18 for putting on.

And, In paſte grounds that have to hit to objects ſurrounded with ſtormont, or other cloſe or ſolid ground, it is needful to cut within the line, for it is better the ground ſhould come into the object than not come up to it, as that will ſhew a diſagreeable run of white outſide the line; but if the object is only to have looſe ground work round it, it would be better to ſecure the filling up of the object: it is only ſuggeſted in that caſe to be better within than without, making ſome allowance for the ſpreading of the colour.

Again, if there be large and ſmall bodies to work together in the ſame ground, as fig. 85, cut the ſmall bodies rather more within the line than if they ſtood alone, as the quantity of colour neceſſary to be carried by the large ones and the blow requiſite to impreſs them, would otherwiſe cauſe the ſmall ones to ſpread over the line. See Rules 12 and 18 for putting on, where there are ſimilar obſervations reſpecting both prints and ounds.

Digitized by Google

Note, In ſpeaking of cutting, it may be obſerved to thoſe who prefer the uſeful to the ſuperficial, that as what is required of a print or ground, is its being able to make a proper impreſſion, and for a proper length of time, all that is done which does not tend to that point is delaying its going to work, of courſe, all that delicacy and formality in the ſubordinate parts of hand-tooling, chiſſeling, &c. which ſome affect, can only give a print or ground a good appearance, but does not enhance its intrific value in point of utility; as every one knows that the clearneſs and ſoundneſs of the cutting in reſpect to the face, is the eſſential quality that is deſired; hence longer time beſtowed in thoſe particulars, more than ſufficiently clearing the ſuperfluous wood away, is, beſide delaying the working of it (as above-ſaid) rendering it unneceſſarily expenſive to the proprietor.*

The Writer cannot ſuppreſs the inſertion of a word or two, as a hint to ſome Maſters (though copiouſly diſcuſſed with ſimilar matters in the eſſay

* It is ſuppoſed the Writer will not be thanked by many Cutters for this obſervation, but as he occaſionally makes free with Maſters (as the following obſervation evinces, as well as many others, which will appear at the cloſe of this publication, as likewiſe where he makes as free even with himſelf) he truſts they muſt acquit him of partiality in what he advances

Digitized by Google

eſſay toward the concluſion of this work) that they do not always get their cutting done ſo cheap as they imagine, when they preſs a man down to a low price, for a Cutter who is a maſter of his buſineſs has a mode of working, not eaſily detected when he brings his work home, according to the price bargained for, or what he expects for it from his knowledge of his employer in that particular; eſpecially if he knows his employers judgment of cutting is not very extenſive.

As there is a wide difference between being impoſed on, and getting work done for much leſs than it is worth, the writer juſt hints here at the impolicy of ſome, who when they get work done very cheap, (no matter through what motive it is ſo done) cannot be ſo far contented, but will ſpeak of it, and will perhaps ſay who the perſon was, in order to induce others to do the ſame; the conſequence may be a combination not to work for ſuch a perſon; and any how it renders ſuch a man unwilling to do work very cheap again: after hinting at impolicy on one ſide, it is proper to hint to Cutters, that it is equally impolitic to make a boaſt (particularly a public one) how expeditiouſly they can work, what excellent and peculiar inſtruments they uſe, how well paid they have been, &c. when this is the caſe, can it be much wondered that maſters ſo often doubt the integrity of their workmen, reſpecting the value they ſet on their performances.

Digitized by Google

This valuation of cutting is a disagreeable and difficult part for a principal to go through, if he is willing to give labour the price it deserves, or if he would avoid being deceived or imposed on; some leave it to arbitration, some fix a price at first, and others pay according to their ideas of its worth when it is done, or for what they can get it done; unfortunately each mode has its inconvenience; arbitration is often but another term for collusion, when left to other Cutters, and to many it is disagreeable, and perhaps injurious to interfere between master and man; as to fixing a price, though it may prevent some contention when the work is finished, it does not ensure good work (as above intimated), for as a man cannot always tell merely by seeing the drawing, what work there may be in the cutting, he accordingly suits his performance to the price; or if he agreed to do it well, he may use all the deceptive and expeditious modes that he can (as before spoken of) and lastly, to pay for cutting according to its worth, cannot be done without a consummate knowledge of the operation, which includes a knowledge of the deceptive modes that may be used, so as to make it appear sound, though it be really far otherwise.

It is not here attempted to offer a decision on the above observation, as that must depend on circumstances which will render one or the other of

Digitized by Google

of theſe modes moſt eligible to adopt; it however is offered as an opinion, that generally ſpeaking, the laſt-mentioned one is the moſt equitable; but then upon that principle it can only be adopted by a judge of cutting, and ſuch a one will endeavour to ſuit the quality of what he gives out, to the ability of the Cutter; and of courſe makes the neceſſary diſtinctions in the eſtimation of its worth.

It is begged it may be obſerved, when ſpeaking of expeditious modes, thoſe are meant where deception is uſed to make the work appear well at firſt; for it certainly ought not to be conſidered by a maſter as an inducement for a man to work cheap, if he can work more expeditiouſly than many others, ſo the work is perfect in every particular; in fact, he deſerves a higher price in proportion to his expedition; for if he can execute a piece of work in 6 days, that another would be 8 or 10 about, and brings it home, it goes to work ſo much ſooner; and in many caſes no maſter needs being told ſuch a circumſtance is of very material and pecuniary conſequence; but unhappily, workmen ſuſpecting an advantage will be taken from finiſhing work very ſoon, and maſters ſuſpecting they are impoſed on, by a deal of work being ſoon done, will, moſt probably, never ſuffer, in general, ſuch an accommodation to take place.

Digitized by Google

Of Pinning.

BEFORE you begin pinning a block, eſpecially if it is to be pretty full, a few brads drove in, in the vacant places or indeed all that are neceſſary, is very proper to be done, in order to ſecure the veneer from riſing or removing, and if the pinning be very cloſe or covering, take care that brads are firſt put in, punched down, and pegs put over them.

1. A block that has many pins to be put into it particularly if it is not a ſmall one, ſhould be hollow in proportion to the ſize and quantity of the pins, and ſhould be in a dry ſtate, for pins acting as wedges even in a degree when bored for, they naturally tend to throw a block round; hence if a block that has a great many pins, and particularly if they be large ones, happens to be very round when began to be pinned, the conſequence perhaps would be its being rendered uſeleſs, from the extreme round ſtate into which it would then be thrown.

This

Digitized by Google

This inconvenience may poſſibly be prevented in ſome degree where the back, or a croſs back is but weak, by having a ſtrong temporary back firmly fixed on.

---

2. It is uſual for Pinners in pinning of blocks to begin at one end and work gradually on to the other, whether the pinning is full or not, but perhaps it would be more adviſeable to do a little at one end, then a little at the other, then a little in the middle, and fill up or finiſh in the ſame progreſſive manner; as, beſides the chance of avoiding the partial warping of the block, you are more certain, by doing thus, of preſerving an even face of pinning; for it ſometimes happens that pinning is fuller at one end than the other, or different in other reſpects, from being finiſhed in a hurry, or put into another perſon's hands, and the like; which would probably be avoided, by purſuing the method above recommended, or ſomething ſimilar to it.

---

3. Where large and ſmall pins are to ſtand together, it is in general neceſſary to put in the large ones firſt, eſpecially if they be conſiderably ſo, as by taking up the moſt room you will the better judge where to put in the ſmall ones, and ſmall ones can be the eaſier ſet to them.

Digitized by Google

4. The quicker pins are put in, the firmer they hold; and the more uniformly upright they are put in, the evener they work; for if put in very ſlanting, the ſetting of them upright afterwards, looſens them at the bottom; and conſequently in the courſe of working they will be eaſily removed, as well as by other common accidents.

5. If you have a number of large pins to put in, avoid (if the pattern will admit) two or more ſtanding near each other exactly in a line with the grain, eſpecially if not bored for, from the great chance of their ſplitting the face, by ſtanding in ſuch a direction.

6. If you have a flower, or leaf, or other object, as fig. 86, begin at the points, and then fill up the line as regularly as you can, that is, in reſpect to the diſtances of the pins from each other: If the ſhape be like fig. 87, begin at the points, and then fill up the line.

If

7. If you have branchings, ſprays, curls, &c. as fig. 88, 89, and 90, take care of the line or ſtalk from which the others run or branch out, as theſe ſhould be kept in as perfect a line as you can, keeping however the angles in view, that the corners may be open in making the leſſer branches.

8. If you have ſmall curve lines, as fig. 91, do not put a pin in the middle, as fig. 92, but rather put two, as fig. 93, otherwiſe it will have an angular appearance, eſpecially if the pins be large.

9. Where pins are required to be placed near the cutting as fig. 94, the ſhade of the wood will frequently deceive the pinner, reſpecting the diſtance to be obſerved in placing the pins; in order to guard againſt this circumſtance, frequently look at the block with the face held directly againſt the light.

Digitized by Google

10. If you file the pins without the wood being wetted or ſwelled, do not file them even with the wood; elſe in a very little time they will be too low; as excluſive of the wood ſwelling by working, the repeated blows of the Printer at the back of the block, draw the pins further in, excluſive likewiſe of the pins wearing away, eſpecially when worked in colour in which iron liquor is uſed. Obſerve likewiſe, before you begin fileing, if there be ſuch a quantity of pins as to make it of conſequence, that the face be even; or as nearly ſo as it can poſſibly be.

11. If on any particular account, you ſwell the wood, obſerve that there be brads to prevent the veneer from riſing; this however is a bad method from the chance of the face being damaged by the file or pumice-ſtone, and conſequently rendered coarſe or gouty; it is therefore better to file it in a dry ſtate, without fileing ſo low as the wood, as the wood when it is damped will ſwell and be even with the ſurface of the pins, unleſs the pins are left very much above it.

12. In

Digitized by Google

12. In bradding prints and grounds, drive the brads different ways, that they may have the firmer hold; a few brads well diſpoſed of is better than a great many, as they act as wedges in the back, even if the veneer is drilled or bored through, and of courſe tend to throw ſome blocks round the ſame as pins would, as the boring for the brads muſt not be ſo deep as the brads are long, they then having no hold of the wood; and remember, in prints or grounds that have backs of deal, or other ſlight wood; longer brads than common are requiſite; otherwiſe, from the ſoftneſs of the wood, or openneſs of the grain, they will be of little ſervice.

13. Take care that brads do not ſtand in lines cloſe together with the grain, as the more diamond wiſe they ſtand, the better they hold; and conſequently a leſs number will do; neither is there ſuch a chance of the face being ſplit.

Care ſhould likewiſe be taken that brads are not put on a joint; it is however neceſſary where there is a joint, to put more brads about it than elſewhere, as well as round the edge.

It

Digitized by Google

Note, It may be expected that more might be ſaid about Cutting and Pinning, and more the Writer could have ſaid about as every Cutter and Pinner has ſomething peculiar in the conſtruction of tools, mode of uſing them, and the like*, (though ſome of the advantages they think they poſſeſs, are only of conſequence, from that ſatisfaction which every perſon experiences in doing any thing his own way§) it would be to little purpoſe to give directions in many caſes, even if it were poſſible to do it explicitly.

* Every one knows how workmen will contend about their reſpective excellencies: This however would be leſs ridiculous, if the contention was not too generally carried on in improper places.

§ The Writer here again makes a remark addreſſed to Maſters (tho' touched on already, and will be more generally dwelt on with collateral circumſtances, in the eſſay at the cloſing of this work) that half the facility of a man's operations (granting he has abilities) is owing to the liberty of following his own method, hence at a ſhop he ſeldom ſeems to do juſtice, or that what he does is done by a proper mode, it being too cuſtomary in Maſters to be minuting as it were, how much is done, as well as perpetually enquiring how ſuch a thing is to be done, or why not done in ſuch a manner, thus the man (unleſs he is little ſolicitous about his ſituation

Hence the writer deems it ſufficient to have attended principally to thoſe matters which immediately lead to the point he all along wiſhes to be kept in view; that is, the effect intended to be produced on the cloth: but nevertheleſs, Cutters and Pinners may find in other parts of this work obſervations enough that concern them; though, (as already intimated) they are more conveniently introduced under other heads. ——See particularly Rule 1, 12, 14, 17 and 19 for putting on, as well as ſeveral of the Rules for pitches, and what is ſaid about blocks.

ſituation) is under continual reſtraint, and conſequently the progreſs of his work impeded, (to ſay nothing of occaſional interruptions,) hence, few expeditious cutters as well as others, who can have buſineſs at home, though capable of doing much general ſervice at a ſhop, have any inclination to be at one: It muſt not be concluded however, but that the progreſs of a Man's work ſhould be looked after; what the Writer means is, that as no perſon is always alike able or diſpoſed to work, it is more adviſeable to form an eſtimate of his abilities, by what he can do in the courſe of a day or two, a week, or in ſome caſes a month or more, and then ſet a value on him accordingly.

Digitized by Google

Of Blockmaking.

PREVIOUS to what the Writer has to advance on the management of blocks, a word or two addreſſed to Block-makers cannot be deemed unneceſſary, as their inattention in general (if not entirely) to what he obſerves below, has rendered many prints and grounds of no uſe; while the fault has been attributed to cauſes very remote from the real ones. Therefore, if Block-makers wiſh for the credit of making firm ſtanding or good working blocks, they ſhould be careful, that, in the firſt inſtance, the faces and backs are free from cracks and ſhivers, and not tending to a decayed ſtate no more than being too green, and that of croſſed backs the backs are alike in age, texture and ſeaſoning; indeed they ſhould be cut not only from the ſame plank, but from the ſame part of the plank, elſe the reſiſtance of one to the other cannot be reciprocal, and conſequently the very purpoſe for which two backs are joined together is directly deſtroyed. *See the obſervation reſpecting croſs-backed blocks further on.*

Digitized by Google

Block-makers ſhould likewiſe take care that in joined faces, the pieces of the face be of the ſame part of the plank, as a joined face that has one ſide clear, hard, or ſtrait grained, and the other ſoft, beachy, curly or knotty, is hardly fit for any purpoſe; the bad being unfit to go with the good, which is only proper for nice work, and the good part is thrown away if the whole block be uſed for ſomething coarſe, or of little importance; and even a whole-faced one had better not be ſo, unleſs the whole face is of the ſame quality all over; therefore two or more indifferent pieces of veneer had better be put together, as ſerving for ſomething that is coarſe, and the ſame of two good pieces for a contrary purpoſe.

Further, if one ſide of a piece of veneer that is broad enough for a whole face is bad and the other ſide good, the face had better be parted than put on a back whole, it being then in the ſame predicament as a joined face, that has one piece good and the other indifferent; in ſhort, a blockmaker had better burn his very indifferent wood, than ſend it out, unleſs avowedly ſent home as ſuch, and as ſuch ordered, as only fit for common purpoſes; otherwiſe ſending a number of blocks of the above deſcription, gives room

to

Digitized by Google

to ſuppoſe he has not a ſufficient quantity of good wood by him, or is too ignorant or negligent of his buſineſs, or elſe incapable of attending it ſo as to do juſtice to the orders he may receive.

He ſhould likewiſe guard againſt being ſuſpected of ſubſtituting inferior woods (needleſs to name here) for holly, pear-tree, or whatever elſe may be ordered, as the diſcredit will not be eſcaped, when, in the courſe of working, their inferior qualities are too evident to cover the deception.

The writer is aware that in ſome of the inſtances juſt mentioned, much muſt be left to journeymen, who, too often, are not very ſolicitous about their maſter's intereſt, or reputation. This however does not (with every perſon) acquit the maſter of his reſponſibility; he is applied to, and of courſe looked to for a proper performance of the orders.

It may therefore be obſerved, as a hint to Blockmakers, or their men, that among the cauſes of blocks not ſtanding well, may be their taking part of a plank for a back that has a tendancy to warp one way, and a piece of veneer with a ten-

Digitized by Google

dancy to warp the other, and glueing them together in ſuch a ſtate. The ſame may be obſerved of two croſs backs; and likewiſe of joined faces; in which latter caſe, the conſequence is, one part of the face riſing from the back at the edges, and the other riſing in the middle, that is, the middle of the joined piece, not the middle of the block.

Another cauſe is owing to planks, veneers, &c. lying in too hot, or too damp a ſituation, and are accordingly warped this or that way; hence when made into blocks, and laid in a proper place, they cannot long remain true, but endeavour to recover their priſtine ſtate.

Another circumſtance not always guarded againſt, and probably the cauſe of blocks caſting various ways when at work, is the grain of the veneer running obliquely, ſometimes the grain of the back, and ſometimes both; in either of theſe, or ſimilar caſes, it is evident the blocks will warp in different directions. A little care would prevent this, by cutting or ſquaring the pieces either for veneers or backs, directly with the grain; and then, if they caſt, it may be more expected it will be ſideways or endways, (according to the conſtruction of the block) rather

Digitized by Google

ther than corner-ways, which every one knows is the moſt difficult to remedy. In ſhort, it may ſafely be ſaid, of prints and grounds that have never been able to do work properly from warping, that the cauſe has been owing to circumſtances not properly attended to by the Block-maker, in the inſtances above-mentioned, or in others of which the writer is not competent to ſpeak: However, what he has expatiated on, he here brings to a point which may ſerve as a kind of memento to every perſon who has to do with blocks.

If it be a joined block, ſee that the pieces are of equal quality as to the face, whether both good, or both indifferent.

If it be a whole face, ſee that it be nearly the ſame quality of each ſide.

See that the grain does not run obliquely, and the ſame of the back, if a ſingle one.

Of croſs-backs nothing can be ſaid but of the outer one, and of that it may be ſeen whether or not it directly or obliquely anſwers to the face.

Digitized by Google

Reſpecting the ſeaſoning, few can judge of that at ſight; the other circumſtances of knotty, beachy, or other kinds of veneers, are what cannot always be avoided, as all blocks cannot be equally good, neither is it neceſſary, as very indifferent blocks will anſwer in ſome inſtances, where, to uſe good ones, would be folly and wakefulneſs.

Digitized by Google

Of the uſe and management of Blocks.

CROSS-backed blocks, if they muſt be uſed, are moſt proper for prints, but particularly for prints that have much work, and that have grounds to them not very eaſy to be hit in; and the firmer the backs are fixed to each other, the better; in order to render them as little liable to warp as poſſible; for the evenneſs of the face of the print being of the utmoſt conſequence to preſerve, no conſideration ſhould be ſpared to attain ſo deſireable an object. The grounds however ſhould be on ſingle back blocks, that they may occaſionally be made round or hollow, to ſuit the contracting or ſpreading of the face of the print. An objection notwithſtanding lies here in the caſe of prints that have the work cloſe and ſolid; as they cannot be taken off too wide, on account of the quantity of colour which they carry, cauſing the cloth, if ſoft, to dilate ſo much, that the grounds are generally too narrow

row, although the print is brought hollow perhaps in order to work it. In theſe inſtances, probably ſingle backed blocks may be beſt, it being difficult, if not impoſſible ſometimes, to force croſs-backed blocks round; and to ſwell them by ſoaking, lays a foundation for their being always out of order; indeed if the blocks for the grounds could be taken off proportionably hollow, and very dry, and made true, or rather round when they went to work, it might anſwer the ſame purpoſe. This inconvenience however does not happen when the cloth is permitted to get very dry, as then the quantity of colour cauſes it to contract; but in this caſe, if too much contracted, the laying of it ſome time in a rather damp place, will cauſe it to give out again.

This object of rendering prints and grounds fit for each other, and the keeping of them in that ſtate, is, in the proceſs of printing, of the firſt conſequence, and (as before intimated) cannot be too much attended; as the immediate and certain effect of their not agreeing, or of the prints getting out of order, is the delay of the work; and the endeavouring to remedy it, by putting the face on another back, rarely anſwers the purpoſe

Digitized by Google

purpoſe, eſpecially if it gets into an unſkilful printer's hands. For, among other circumſtances, a great number of ſcrews are uſually put in, which, beſide twiſting the wood of themſelves, the printer is continually tightening or looſening ſome of them, or forcing in wedges of ſome kind, ſoaking one end, then the other, and ſo on, till at laſt, the print is rendered entirely uſeleſs, and the pattern is ſtopped from going on with, perhaps, only a piece or two printed; and as it may be too late to cut it over again, the misfortune is aggravated, as the expectation of gain from the working of it is at an end.

The firmer croſſed backs can be united without ſcrews (for ſcrews frequently force up the faces) there will be the greater probability of their ſtanding; and if, for the conveniency of having ſpan holes, a back is let in, the ſcrews ſhould ſtand quite acroſs, or in ſquares; and it ſhould by no means be ſo tight as to affect the print endways; therefore it ſeems more proper to let the grain of the back which is let in, be the ſame way as that of the upper back, whether it be thinner or thicker than that next to the veneer; for it may be reaſonably ſuppoſed, that, if the upper back is nearly cut through in the

Digitized by Google

middle, to let in a ſmall one, it will loſe much of its power to reſiſt the warping of the back which joins to the veneer; and much leſs of its power will be loſt if the upper back be cut quite acroſs, as well as quite through to the other back; for from that circumſtance, together with forcing the moveable back tight, the probability of the print caſting endways, is aggravated to a certainty.

Another reaſon for endeavouring to fix prints to an uniform ſtate is, that when ſingle backed prints get very round, dove tails are generally let in very tightly, in order to check that tendency; the conſequence of which is, that the back rarely fails of being ſplit, eſpecially if not eaſed at proper times, or otherwiſe carefully attended to.

But after all, from the circumſtance of not being able to know at firſt, whether croſſed backs are of equal qualities, or as they ſhould be in other reſpects, ſound ſingle oak backs ſeem preferable for general uſe, as not laying under the diſadvantage attending croſſed backs; which is the great difficulty, if not impoſſibility, to warp them as you wiſh; or if once warped, to get them true again at pleaſure.

To

Digitized by Google

To keep ſome particular prints true by force, if force be neceſſary, a ſtrait piece of iron, rather thin, and of a breadth anſwerable to the thickneſs of the block, might be firmly bound round as a fillet, and anſwer that purpoſe; eſpecially if, to ſuch a check, two pieces are annexed to the ſides into which the back is ſlid.

The croſſed backs of blocks, perhaps ſhould be either all of deal, or all of oak, becauſe if one back is of oak, and the oak back is next to the veneer, that circumſtance tends to throw the print hollow endways; neither the veneer nor the deal having ſtrength ſufficient to reſiſt the caſting of the oak; for it may here be obſerved, and proper uſe may be made of the remark, that though oak is harder than deal, yet deal has an advantage over oak, in not imbibing water ſo readily, and of courſe, not being ſo likely to caſt by damping or wetting; but then, as a counterbalance, heat will ſooner affect it.

It may likewiſe be here obſerved, of thoſe trees growing where the ſun does not affect them all round, that one ſide of them is ſofter than the other, the ſame as wood is ſofter or harder the nearer or farther it is from what carpenters call the ſap; to which cauſe, among many others, oftentimes not to be accounted for, is the aptitude of ſome blocks to warp this or that way, in ſpite of every endeavour to bring them to the ſtate

Digitized by Google

deſired, or to keep them in that ſtate; from which conſideration, when it is evident which way blocks are naturally inclined to be, and they have remained in a proper place long in that ſtate, whether round or hollow, or whether that tendency is in the backs, or faces, they had better be brought to the ſtate you deſire, by plaining, rather than by heat or wetting them; elſe the conſequence would be, their getting into their former ſtate, as ſoon as left at liberty. But if their tendency to warp any particular way is exhauſted, a ſecond plaining cannot be properly recommended.

Blocks ſhould be kept in a rather dry place, without a fire, at a convenient diſtance from the ground: thoſe intended for prints ſeem to require laying with their faces downwards, and thoſe for grounds with their faces upwards, prints in general requiring rather a round ſtate than otherwiſe, and grounds the contrary. And for conveniency the different ſorts ſhould be kept together, but, if conveniency only is conſidered, the beſt ſituation for blocks to be placed, is on their ſides, in proper ranges on ſhelves one above another, ſo that one can be drawn out without diſplacing the reſt, which is ever the caſe when they ſtand piled one above the other.

Digitized by Google

Of taking off Blocks

for Grounds.

HAVING mentioned the inconveniences attending grounds not fitting, owing to the difficulty of taking off ſome prints round enough; the following expedient, or ſomething like it, may be found to anſwer the purpoſe, without being obliged to ſwell the prints, or contract the blocks intended for the grounds:

Let a piece of ſilk, ſatin, parchment, leather, or whatever you approve of as ſo much ductile and elaſtic, that after being ſtretched it may be contracted again, of about eleven or twelve inches in width, be faſtened at one end to two pieces of wood, ſee fig. 95, each fourteen or fifteen inches long; and at the other end let two other frames be fixed to run parallel with the ſilk or whatever elſe it may be: at the other end let there be nuts to receive two ſcrews which are in the frame, and which being taken hold of by them, you can ſtretch or widen the impreſſion which is to be laid on the ſilk, or other matter, to the degree required; which when done,

Digitized by Google

done, lay the block on it, hitting it on the back as uſual, to receive the colour from the impreſſion; thus, you are likely to have your purpoſe anſwered, without warping either the print, or the blocks intended for the grounds.

In taking off prints for the grounds in general, the purpoſe is beſt anſwered by having a piece of thin ſilk ſtretched and tightly faſtened to a frame, ſufficiently broad and long, to receive the largeſt prints; as this method has much the advantage over paper, in its laying even, and the colour not ſinking into it after being uſed a few times.

In laying down the block to receive the impreſſion, put the edge very nearly as cloſe as you can, to the impreſſion of the head and ſide print-pitches; and if it be a ground that is to pitch to another ground, obſerve a ſimilar precaution; as no work in the grounds can come out beyond thoſe pitches; for by doing thus you ſave the trouble of ſawing off two ſides, and ſometimes ſave likewiſe a portion of block that may be of uſe.

In-

Digitized by Google

Of taking off BLOCKS.

In order to get impreſſions clear and black, unleſs (as is the caſe ſometimes) a black or dark impreſſion is not wanted, rub the faces with a ſpunge juſt wetted with ſumach or gall liquor.

In taking blocks off with the ſilk, they want but two or three ſmart ſtrokes, and ſometimes none, to get off the impreſſion; but whether taken off from paper or ſilk, the blows ſhould be ſmart and ſharp, or the impreſſion will be either faint or coarſe.

When a perſon has not the conveniency of a table, tub, and ſieve, ſome treacle and lamp-black may be mixed, and diffuſed with a pad made of ſmooth ſoft leather, ſtuffed with wool, over the face of the print; then (as this compoſition will not ſoon dry) lay a ſtiff piece of paper on the face, preſſing it ſufficiently all over, in order to receive the impreſſion on it; which when done, take it off without rumpling it; lay it on the face of the block, and gently rub or preſs the back till the colour, or at leaſt part of it, be transferred to the block. This however cannot conveniently be done if the work is in detached places, or if it be a large or looſe flowing trail.

If

Digitized by Google

Of taking off BLOCKS.

If you take off with paper, endeavour to have your paper ſmooth and pretty ſtiff; for if ſoft, the colour will be imbibed by it, and of courſe leſs will be transferred to the block; foolſcap run through the calendar is perhaps as well as any; as that proceſs renders the ſurface glaſſy, and the colour lays longer on it.

Digitized by Google

General Rules to be obſerved at a Shop.

1. WHEN a print comes home, if not pinned or bradded, or trimmed out doors, the firſt object is to get it bradded and pinned (if there are to be any pins in it*) and ſo much trimmed, that an impreſſion may be had of four joinings; then make what alterations and amendments that may be needful, which being done, get it iron liquored § and backed, or ſpan-holes cut; then

* If the pinning be not of ſuch conſequence as to affect the block, or that the grounds are not affected by it, the pinning can be performed in moſt caſes while the grounds are cutting, and thus ſome time may be ſaved.

§ It is certainly neceſſary to let the face of a print, or a ground that has fine-work, imbibe the iron liquor, eſpecially if the wood be ſoft, for reaſons

Digitized by Google

then get it in order, as well as your blocks, for taking it off for the grounds, and when they come out of the cutter's hands, juſt ſight them to the pitches, but no more, for fear of their wanting ſome addition; and try each ground to a ſeparate impreſſion of the print 4 times joined, to ſee if they all anſwer in reſpect to the pitches, joining, and fitting; which when adjuſted, put all the grounds to one impreſſion of the print four times joined, which when likewiſe adjuſted, make your laſt trial on a piece of cloth, which ſhould be kept for ſuch purpoſes; then get them numbered, the grounds marked what colour they work in, and painted between the work where handtooled, and round the ſides, to prevent the water much affecting them, (as intimated in the note) then give notice they are ready for working, and keep them in a proper place till wanted; which you ſhould always know a day or two before-hand, otherwiſe the print may go to work in a very improper ſtate, in being either too round or too hollow

---

reaſons well known: and to prevent the backs of prints or grounds from imbibing water, the effect of which is well known, it is as neceſſary to paint them where the veneer is hand-tooled away, and likewiſe the ſides and ends.

Digitized by Google

hollow.---*See the article ſetting prints and grounds to work.*

Note, If it be a rule to have prints and grounds trimmed and bradded out doors (which, under certain circumſtances is moſt convenient, as at ſome ſhops there are too few people to do ſuch things, or they may be buſy on other matters) directions ſhould be given in what manner they are to be bradded, and particularly how much trimmed, for fear the joinings or other parts of the work be imperfect, and of courſe you may find it needful to make ſome additions.

---

2. As it frequently happens in prints and grounds, where the work is looſe, or wide apart, that the pitches ſtand detatched from the work, care ſhould be taken that a ſufficiency of veneer be left about the pitch to admit of two or three brads, otherwiſe the brads, eſpecially if careleſſly put in, are apt to ſplit the veneer, and the pitch pin is conſequently injured, or perhaps entirely removed; which at all times is troubleſome to replace in a proper manner.

3. As

Digitized by Google

3. As it is probable that notwithstanding the care which may have been taken to render the prints and grounds perfect in every particular, something may be faulty, it is necessary (and an injunction should accordingly be given) that every printer when he has to begin a new print, or even a ground, should send for the drawer or some proper person to look at it before he proceeds.

This leads the Writer to observe that a drawer or putter-on ought frequently to go round the Printing Shop, there being continually, from some oversight of his own, the negligence of others, or from accidents that will unavoidably happen, something to alter, remove or rectify.

4. A Print or ground should never be sent to the print room, or any other place to be put by till wanted, without knowing of the proper person whether or not it is done with, and with cutters (as mentioned before) the first object should

Digitized by Google

ſhould be to brad and juſt ſo much trim it that the pitches ſhould be ſeen, and then give it to the drawer, or if it be the carpenters province to brad and trim it, it ſhould be ſent to him, and when he has done, he has to deliver it to the proper perſon.

N.B. A firſt impreſſion of every print, and the laſt joined one, with the grounds, ſhould be carefully preſerved; and where there are young apprentices, good employment may be made for them, by always having impreſſions of prints, and ſome particular grounds, on clear paper, in order to vary the colouring of the pattern as much as poſſible, it not being ſo laborious as inventing patterns, and yet partaking of the nature of it, as it is inventing new grounds for them.

Digitized by Google

Digitized by Google

Of preparing and ſetting Prints and Grounds to work,

Or, in other Words,

Making the laſt Trial of the joinings and fitting of Prints and Grounds.

IF there be pin work, examine carefully whether it be all in * and properly ſet, then ſee how the pitches anſwer by joining the print by the ſquares, and that none of them are obſcured by the joinings, and ſee likewiſe, that the impreſſion has an even face.

2. If the reds are ſeparate, that is to ſay, if there be a brown red boundage for flowers, or other objects, pitch the brown red next, to ſee whether

* This is a circumſtance very apt to be more or leſs omitted, and much ſometimes depend on it, both in pencilling and grounding, therefore whoever is making this trial, ſhould always have the pattern by him, to compare with the impreſſions.

Digitized by Google

whether the ſtalks want lengthening, ſhortening or trimming; and if any other colour works with the ſtalk, it ſhould be ſtruck in at the ſame time, and amended or altered where neceſſary; then, if there be two purples, beſides the black, ſtrike in the deep one, and then the pale one; and, if there be three reds, obſerve the ſame proceſs with them.

---

3. If there be graſs grounds, ſee that none of the table-work obſcure the pitches, even making an allowance for imperfect joinings; or in other words ſtrike in whatever grounds there are, in the ſame progreſſion that the printer will print them.

---

4. If there be three purples and three reds, ſee that the different ſhades ſtand diſtinct from from each other; and if there be pinning, ſee that it joins or touches the wood where intended, or that it ſtand at a proper diſtance. Paper being deceiving, it is beſt, (as ſaid before) to keep a ſpare piece of cloth for ſuch trials, or at leaſt for the laſt one, when it is ſuppoſed the prints and grounds are all fit for working.

5. In

Digitized by Google

5. In order (as likewiſe intimated before) to render the work as neat as poſſible, let the pitch-pins, or the tops of them, be as ſmall as poſſible, ſo that they can but be ſeen plainly enough to prevent confuſion or miſtake.

6. As it is in general deemed beſt to work the pieces as given out, firſt entirely through with the print alone, and then with the grounds in due ſucceſſion; therefore, while the print is working, there is time to get the grounds in order againſt they are wanted;* and a print ſhould be carefully looked at before it goes to work, to ſee that it is likely to have the grounds anſwer; as for inſtance, if there be much ſolid work in the print, and the cloth be ſoft, it will be needful to work it as narrow as poſſible; but if it be a light one, and has to work on hard cloth, ſuch caution will not be neceſſary, neither will ſuch caution be needful, if the print has been taken off for the grounds, by ſome ſuch mode as is ſuggeſted a few leaves back, in order to extend whatever the impreſſion is received on, before the blocks for the grounds were laid on it.

* That is, as required to be either true, round or hollow.

Digitized by Google

Note, It may be here obſerved, that good printing depends a great deal on the manner in which cloth (as the phraſe is) is got up* ; but particularly, how it is calendered ; and in the caſe of cloth having to be grounded after it comes off the graſs, too much attention cannot be beſtowed on the means to render the performance eaſy and expeditious ; in attaining which, the grand object is to get the cloth as near as poſſible to the ſtate in which it was printed on the table ; to which ſtate the nearer it can be brought, it need not be ſaid that the execution of

* If cloth is calendered too wet, ſtove drying will take the calendering out ; and if one edge is wetter than the other, then after ſtove-drying, one edge muſt run ſlacker than the other, or if the calender itſelf is imperfect, and the cloth naturally ſlimſy. Printers will accordingly complain ; but, ſuch inconvenience may be partly removed, by running the pieces through a liquid of a ſtiffening quality.

The writer here mentions an error ſome Printers fall into of always looking at the back ſide of a piece for the colour : in ſome caſes it is abſolutely neceſſary, but in general it is wrong, to let it go quite through, and in ſome caſes very much ſo.

Digitized by Google

of the after-grounding muſt be proportionably accurate and eaſy. But,

As the common methods of ſtretching and rolling are far from being adequate, except perhaps, for very ſmall grounds, a ſuggeſtion or two may furniſh means for improvement.

Firſt, as the piece comes through the calender, which ſhould be in as ſquare a direction as poſſible,* or from over the rolls, if it be ſtowed, let it be received on a thin deal board turning on a horizontal ſpindle, ſee fig. 96, and at the corners and middle, let points be fixed, ſtanding rather leſs than half an inch out, as fig. 97, to take hold of the cloth as you lap or fold the board; and at every fold where the point comes through, make a ſmall mark with ſome colour that will remain diſtinct from the colour with which the cloth is printed; this done, the Printer may print from it, as it is unfolded, either by hand, or turning it on pivots at the end of his table; and when it has gone through the uſual proceſſes

* In any caſe, much indeed depends on good calendering, both for the eaſe and conveniency of the printer, and the delivery or receiving of the colour, particularly where moſt requiſite, that it ſink not far into the cloth.

Digitized by Google

of copper-work and fielding, let it, preparatory to its being grounded, be received on the ſame board (perhaps it may be needful to ſtretch it firſt,) taking care that the points fall on the cloth where the marks were made before; it being evident, that if they go through where they did before, for which the marks are a guide, and the grounds are laid in as the cloth is unfolded, they cannot be a great way out of their places, even if larger grounds are made uſe of than in common. In ſome caſes, if the cloth be received on a board without points, and a mark made at every fold, it may be grounded eaſier than in common, by taking care that the marks anſwer to every fold again in the ſame manner.

Or ſomething ſimilar may be done by receiving the cloth on a roller, with marks at a proper diſtances, and when it comes from the graſs, rolled in the ſame manner.

The piece might likewiſe be eaſily grounded, if ſtretched on a frame to keep the impreſſions ſquare, or ſuch a thing may be uſed in printing with marks made at certain diſtances, and grounded from the ſame frame.

Digitized by Google

Of Printing.

PReparatory to what the writer has to obſerve, concerning the operation of printing, a word, or two of general import cannot be unapplicable, and probably to ſome Printers not unacceptable.

In the firſt place, it is obſerved, that it is a very common ſaying among printers, and even held as a maxim by many, "that no perſon is fit to give directions to Printers, or occaſionally point out any thing as faulty, or, in other words, to overlook that branch of the buſineſs, unleſs he is, or has been a Printer himſelf."

The Writer will not ſet about in a formal manner to oppoſe the maxim; becauſe it ſeems to him, from what he has gathered by an attendance to that department, to be founded on a very reſtrictive principle, ſimply this, that printers in general, conclude or apprehend, a perſon who is not a Printer, does not lay the neceſſary ſtreſs upon their

Digitized by Google

their being properly accommodated with every requiſite, in reſpect to colour, ſieves, ſtate of their piece, &c. &c. &c. and therefore cannot ſee the inconvenience, which, in ſome inſtance or another they labour under, when ſuch a perſon ventures to point to any part of their work as not being properly executed; he will only ſay, that many who make that a maxim, don't conſider, that a *mere* printer, is but a little more competent to that ſituation than a common fieldman; for unleſs he has a general judgment of whatever has any relation to printing (and that includes ſome knowledge of the other branches under ſome ſyſtematical arrangement) he is not ſo proper to ſuperintend as another, who poſſeſſes ſuch a portion of judgment, although he never had a print in his hand; as ſuch a one is more able to guard againſt bad work (unleſs from the allowed incapacity of the workman) and more able to remedy it when it occurs. But with thoſe requiſites it is nevertheleſs an advantage to him who has to overlook Printers in being or having been a Printer.

In fact the writer apprehends, too many of thoſe who hold that maxim, do not clearly know when every appendage is in proper condition, or when

Digitized by Google

when really ſo how to keep them in that ſtate; hence they are ſoon at a loſs in one inſtance or another, and when found fault with, quickly get more confuſed; and then, not knowing how to extricate themſelves; lay the fault on any thing rather than their own inability or want of judgment; for unleſs their ideas go along with the methods pointed out to them how to remedy the fault, they are as much in the dark when left to themſelves, as they were at firſt, if not much more embarraſſed. The writer can however ſay, he has often ſeen the futility of ſuch excuſes, by a Printer of approved abilities, executing with apparent eaſe, under a ſimilarity of circumſtances, what another could not make work with fit to be ſeen.

Reverting immediately to the maxim above ſpoken of, the writer truſts, a Printer will however grant, if he has every accommodation he requires, that a perſon who is not a Printer may at leaſt know when the work does not appear as it ſhould, and may venture to ſay how it ſhould be; and this leads to remark on another common phraſe of Printers, when under certain circumſtances ſome fault is found with their work reſpecting the joinings, which is "that they keep to the pins."

Digitized by Google

Now, however ſtrange it may ſeem to ſome Printers, the writer aſſerts that the pitch-pins are not his proper and infallible guides; for every Printer finds at times, that through the twiſt of the cloth, the warping of his print, a miſtake in pitching, and many other cauſes, the pins only ſerve as mere directions or guides, to whereabout he is to lay his print: in ſhort, joining a print and joining the pitches are different things; the ſame as pitching a ground by a pin or two, or by pitching the ſhape of it to the work of the print.

Therefore a Printer ought always to keep in his eye or his mind, how the print ſhould join ſuppoſing he had no pins to pitch by, for what will become of his printing when he loſes his joinings, if he has no other mode of determining him than the pins? and even in joining by the pins, his ſight ſhould take in the whole top and ſide of the print, and he ſhould conſider and know how the work is to fall, otherwiſe he cannot work to a certainty in reſpect to the joinings, or getting into them, when by any cauſe whatever he is thrown out.

It muſt be obſerved however, that in this, as well as in every other rule, for any operation whatever,

Digitized by Google

whatever, it is impoſſible to provide for every circumſtance, ſo in this caſe it is allowed that ſome prints, from the nature of their conſtruction, ſuch as very promiſcuous or irregularly ſhaped ones, ſeem to have nothing to direct the Printer but the pins; but even in this caſe, excluſive of the pitch pins, there is an attention due to keeping the face at the joinings as even, or as much alike the reſt of the impreſſion as poſſible, which will not be the caſe if the work be too cloſe, or ſlack at the joinings.

Further, it may be advanced that in theſe inſtances, lightly as ſome printers may think of Grounders, they may be looked to as examples for their imitation, as they rarely regard pins, ſo much as the ſhape of the work, eſpecially in graſs grounds; and that implies a neceſſity of ſtudying (if it may be ſo ſaid) what the nature of the pattern is; for even when pins may anſwer, they generally have their grounds ſighted all round; not looking juſt at this or that corner, but (as every printer ought) they employ their ſight and attention on the whole length of the ends and ſides.

After ſaying thus much, which the Writer begs every journeyman printer not to take as arrogantly advanced, but only as ſuggeſtions for him-

Digitized by Google

him to consider of, and turn to his own advantage, he proceeds to speak immediately to the operative part.

When a Printer takes a new print in hand,* his first care is to try on paper, or a trial piece, that it is in the square, the pitches firm in their places, that the print does not want mending, and that it is neither too round nor too narrow; likewise that his apparatus is in proper order; or if he cannot have it so, he should intimate to the proper person in what particulars it is not so; and the order in which his apparatus ought to be

* As well as the above considerations, a Printer may reflect that the expence incurred by cutting the print he takes in hand, with the additional one of his working it, must be re-imbursed before any profit can accrue to his employer: therefore, as all that depends on his management, he is in a more momentous situation than many think: as all the expence incurred, and the profit reasonably expected, will be lost if through his incapacity or inattention, he spoils what he is entrusted to execute, or suffers his prints or grounds to get any way so out of order, that little, if any, use can be made of them, by himself or any other person.

Digitized by Google

be, no Printer ſhould need to be informed, is, that his blanket is not too nappy nor too hard, too thick nor too thin, his ſieve too fine nor too coarſe, and that his piece is properly calendered or ſtowed. *

Theſe matters adjuſted, the tearing is the next object, and not the leaſt important; for good printing cannot be performed without good tearing; and good tearing can only be ſuch, when a proper and equal quantity of colour is diſpoſed over the ſieve.

In-

* Some may expect perhaps that it be ſpecified here in what inſtances theſe matters are to be attended to. The writer certainly attempted it, but found from various cauſes, ſuch as the cuſtoms of a particular ſhop, the caprice of an overlooker, different courſes of work at different ſhops, &c. he could not do it to his ſatisfaction: it may however be here ſaid, that ſome perſon ſhould be informed of what the deſign of every pattern ſhould be, for much, reſpecting ſieves, colour, ſtrength or ſlightneſs of the impreſſion, &c. depends on that circumſtance: Indeed (as before obſerved) the putter-on need in moſt caſes conſult a proper perſon in the Printing-ſhop.

Digitized by Google

In the circumſtance of trying the joinings, a Printer may be deceived ſometimes, though the pitches of the print all ſeem to anſwer, and the pitch pins of a ground anſwer to the pins or holes in the print; for both theſe caſes may occur, and yet the print not join, nor the grounds fit* (as intimated a little before,) hence if his judgment be not ſufficient to diſcover the deſign of the pattern, in reſpect to the trail, or the diſpoſition of ſet objects, or in what manner the grounds ſhould fall, he ſhould conſult thoſe who may be ſuppoſed to know. He ſhould likewiſe, for the convenience of thoſe who have to ground after him, ſee that the pitches be clear, though they ſhould be but barely ſo (as obſerved in the article reſpecting pitches) and that he keeps his

* This may be illuſtrated by ſuppoſing that the putter-on may have miſtaken his ſquare, and put the pitch-pins at the head further out, or nearer in, than they ſhould be; and the ſame at the ſide: in this caſe the Printer, in trying the joinings, will join by the pitches, though the work may be nearer or cloſer in the joining than it ought to be.

Digitized by Google

his joinings, and his edges particularly even, which but for the ſake of the grounding he might not be ſo careful of.

As a Printer is anſwerable in a degree for his print or grounds keeping in order while he is working them, he ſhould carefully obſerve their tendency to get round or hollow, and ſhould frequently examine whether any parts are broken or worn more than the reſt; in either of which caſes, he ſhould give proper notice: for if a print gets very round in the courſe of working a few pieces, it muſt ſtand to reaſon the grounds can only fit a part of them, unleſs they ſhould chance to follow the tendency of the print, or can be eaſily warped to ſuch a ſtate; but, as there can be no certainty of that, the work ſhould be ſtopped, and the print gently brought to a proper ſtate; for every Printer muſt know, that when (through cauſes, obvious enough) he continues working a print till it is ſo much twiſted, that he cannot poſſibly proceed; violent methods are made uſe of, and the print rarely afterwards is capable of doing tolerable work.

A Printer, beſides being attentive to thoſe particulars immediately under his own eye, is accountable

Digitized by Google

countable for the ignorance or neglect of his tearer, for as a careleſs tearer may very ſoon do irremidiable miſchief to a print, in waſhing and drying it, and likewiſe, by not properly cleaning ſieves, and bruſhes, may do the work much injury; a Printer, if he is not every whit as careleſs, will ſee in what manner they are done: indeed it would be well, from the many accidents that happen from prints, and other matters being left to the care of tearers, who are in general ignorant boys or girls, that it had been an eſtabliſhed cuſtom for the Printer himſelf to do, at leaſt, part of theſe offices.

Beſides the above hints immediately addreſſed to the Printer, as what he ſhould always have in his view, the greateſt part, if not all, that has been obſerved, and may be farther ſpoken of, reſpecting cloth, colour, blocks, and prints and grounds, ſhould come under a *Printers conſideration**; for unleſs he can account, in ſome

* See the note, reſpecting the needfulneſs of a Printer's referring to the rules for putting on, cutting, &c. at the concluſion of this ſection on printing. It may however be here ſaid reſpecting blocks, if a Printer be acquainted with their nature, he

ſome meaſure, for the inconveniences or miſtakes that may happen in the courſe of uſing thoſe articles, he cannot be ſuppoſed to know how to prevent ill-accidents, or how to remedy them when they do happen through any cauſe whatever.

‖‡‖ As nothing that is faulty is too trivial to guard againſt, or to animadvert on,* the writer will cloſe this article on printing with mentioning two or three inſtances of inattention in that department.

The Writer once obſerving, that about one of the corners of every print that was laid, the impreſſion was heavieſt; in pointing it out he could

---

he can the better know how to manage them; and if he be acquainted with cutting, he knows a ſound piece of work from an unſound one, and will, (or at leaſt ought ſo to do) uſe it accordingly.

* This may ſerve as an apology for the inſertion of thoſe obſervations, which may probably to ſome perſons, ſeem of too little conſequence to be remarked on.

Digitized by Google

could get no other reply but that the print worked fuller there than any other part; this, however, from the appearance of the face, he would not grant, the Printer ſtill inſiſting it was ſo, 'till at laſt, looking obliquely on the ſieve, as the tearer worked, he ſaw a ridge of colour left nearly in one place, after the laſt ſtroke, which the tearer could not rectify; at length, looking at the bruſh, it was plain that one part, by ſome means, had been burnt ſo conſiderably, that the hairs were ſo ſhortened and thinned, that that part hardly touched the ſieve; and from her method of holding it, a ridge of colour was always left, that cauſed the effect above mentioned: now here was a triple inſtance of inattention; in the firſt place, the tearer had careleſſly ſuffered the bruſh to be burnt in drying it, (as ſhe afterwards owned, and probably fear of being reprimanded, induced her to keep it ſecret) in the next place ſhe did not perceive the effect it had on the ſieve; and laſtly the Printer, if he perceived the effect on the table, did not, as he ſhould have done, ſee that his apparatus (which included the tearing bruſh) was, or was not in proper order.

Another time the writer ſeeing the head of the impreſſion in general fuller than the reſt, he of courſe mentioned it; but here the fault could not be diſcovered;

Digitized by Google

covered to be in the tearing, nor did it appear to be in the face of the print, and the Printer was ſure it was not his fault; for he dipped and turned his print, and then dipped again (the print requiring much colour) but at laſt, he was convinced it was from his knocking it, and yet perhaps he not to blame; for in the middle of the back that was let in, there was a very hard knot, and the other part toward the head remarkably ſoft; ſo that by inſenſible degrees the knot had at length, by its reſiſtance to the blow of the maul, cauſed it to ſlide as it were into the ſoft part, where it had evidently made a cavity; and the Printer as inſenſibly giving into that direction of the maul, at length, inſtead of hitting the back in the middle, hit it nearer the head, which made the impreſſion heavieſt in that part.

Another having a ſprig print to work, either miſtaking the pitch end, or chuſing that for the pitch that ſeemed moſt commodious for him (for the pitches were pins pitching to pins) he finiſhed what was allotted him to do in that manner, and the miſtake was not ſeen till the work was to be grounded; the conſequence was, that the perſon who had to ground it, was obliged either to begin at the other end of the piece, or to have a ſet of aukward pitches put in to anſwer the work

the

Digitized by Google

the way it was printed; either way however was ankward, the ſide-pitches being off the edge, and particularly ſo, (from circumſtances which cannot be well deſcribed) for the graſs grounds which likewiſe belonged to it. In this inſtance the Printer was in fault, in not concerning himſelf about how the grounds were to fall; or in fact it ſeemed as if he did not note whether any grounds belonged to it, much leſs to take care, as every Printer ſhould, that they were all clear, and diſtinct from each other, as before repeatedly intimated.

Another circumſtance was obſerved, in a Printer working a pattern of ſprigs, that ſtood 6 or 7 inches apart, by making it a point to work the near ſprigs cloſe to the near edge; by this it happened that the off-edge divided a ſprig, ſo that but half of it was on the ſprig; now the inconvenience here that eſcaped the Printer's notice or conſideration, was, that in making up a garment, either half a ſprig muſt frequently appear, or two or three inches of the cloth muſt be cut to waſte; and the pencilling, of courſe, thrown away, but in this circumſtance to prevent or remedy that inconvenience, the Printer had only to work the near ſprig an inch or two further in the piece, which from the great diſtance of the ſprigs from each other was of little conſequence; and then

Digitized by Google

the ſprig that was half off of the off-edge, would have been entirely ſo.

Thus the garment could not be made up without either imperfect ſprigs, or without cutting to waſte; now in this caſe it may be obſerved, there wanted an attention to the remoteſt circumſtance, that of the wear, or at leaſt, the making up of the garment; and this includes a query, which might with propriety have been put to that Printer, which is, If he had been printing that piece as a preſent for a favourite female, whether he would not have beſtowed a little more conſideration on the particular alluded to.

Other inſtances to the above purpoſe could be adduced; it is, however, truſted, by exhibiting theſe few, that every Printer underſtands he is requeſted to conſider himſelf under a neceſſity of attending to many more circumſtances than at the firſt glance may ſeem neceſſary, or even as apparently bearing no relation to his allotted department.

And in proof of what the writer has advanced on the neceſſity of Printers (as well as others) looking to other departments than their own,

if

Digitized by Google

if a Printer refer to Rules 1, 3, 8, 11, 14, 12, 13, 28, for putting-on; Rule 7, for cutting; and Rule 3, for pitches; as well as ſome others, that need not be particularized, he will find articles enough to obſerve.

From looking back to Rule 8, reſpecting the keeping of ſprigs whole, it ſeems proper to obſerve, that a Printer ſhould take care if they drop or riſe in the joining, that he carry one direction through the piece, becauſe if they go one way only half over the table, and half the other, the conſequence will be, that the diſpoſition of the ſprigs (unleſs they are all alike and are to ſtand one way) will appear as fig. 97; for inſtance, ſuppoſe ſix ſprigs ſtand in the print as fig. 98, of courſe they muſt riſe or drop a third to make the joining; now if the pattern be compoſed of two ſorts of ſprigs, ſtanding thus, fig. 99 and 100, one ſort ſhould run acroſs the piece; but if the dropping or riſing is checked in the middle, (becauſe the Printer finds a little inconvenience in the joining, from ſuch a circumſtance) they will appear thus in the middle of the piece, or in ſome other part, fig. 101, that is, three ſprigs of the ſame ſort will be together. This may be probably over-looked in printing, but when the whole piece is ſeen extended over a roll, it will ſoon catch the ſight.

Digitized by Google

Of Pencilling.

THE Writer thinks little if any thing can be ſaid of this operation, it being ſimply filling a line with colour, except in caſes where pencillers have to form ſhades or ſhapes; of this it may be obſerved, and ſomething more may be ſaid in another place, that ſome attempts to be ſure have lately been made, to make ſomething like Drawers of them, by giving them only lines of pins, or others marks, as fig: 102, as a guide; but how accurately they adhere to ſuch directions, or form a ſhape as it ought to be, every obſerver muſt form a deciſion.

In foreign patterns, it is known a deal of work is done by the pencil, but why not practiſeable here, the writer will not (at preſent) ſay any thing further than, that there ſeems to him to be a line, beyond which, in this caſe, as well

Digitized by Google

well as in others, it is abſurd to attempt going beyond;—the beſt Penciller (ſuch as we have in this country) can go but a little way in making ſhapes of any kind, without ſome boundary; of courſe (as above obſerved) reſpecting their pencilling to a line of pins, as well as their making ſhades in flowers, or other objects, it ſeldom does much credit to the deſigner, in the imitation of his deſign, which they ſo roughly and inaccurately make on the cloth, eſpecially when the colour is of a deep hue; in other caſes where a mere ſtain is perhaps only wanted, they may execute what the writer otherwiſe explodes, as here the pins, or whatever elſe it may be which they pencil to, catches the ſight and takes off the attention from the inaccuracy or bad ſhape of the pencillings.

See ſomething reſpecting pencilling Rule 16 and 35 for putting on.

Digitized by Google

Of Engraving.

WHAT has been before ſaid of the putter-on, and the Cutter well conſidering how to attain the effect that is deſired, ſhould likewiſe be attended to by the Engraver; for before the pattern is begun, all impediments towards producing the deſired effect, ſhould be removed; hence the Engraver himſelf ſhould ſtart all the objections that he can diſcover towards that end, and if reaſonable, they will reflect credit on his probity and judgment, as otherwiſe he might to be ſure engrave it, and engrave it well; and yet the plate may not be able to do work properly in every reſpect; but, (as before obſerved) if all impediments are provided againſt, no one need be told there is the greater certainty of the ſucceſs of the operation; beſides, if miſtakes happen (and happen they will to the moſt careful) they will be excuſeable in proportion to the pains taken to prevent them; therefore

therefore, that Engraver has the greateſt merit, who can beſt engage for the effect his engraving will have on the cloth through its whole proceſs, and can accordingly manage his work for that purpoſe, as well as being merely able to cut a clear ſtroke, or being an expeditious workman; and particularly, his value is enhanced if he be well acquainted with the mechaniſm of the copper-plate preſs, and the operation of working it; in ſhort, whatever may be ſaid of an Engraver's good ſight, ſteady hand, neat touches, clean ſtrokes, and ſo on, it is the appearance which his work has on the cloth when finiſhed (unleſs ill-managed at the preſs) that marks his judgment, and makes his labour valuable.

It may be obſerved, that as every Engraver has his peculiar modes of operation (ſimilar to what has been ſaid of Cutters and Pinners) therefore ſuggeſtions towards directing them muſt in many caſes be unneceſſary; though here an Engraver is not circumſtanced as a Cutter, a Pinner, or Printer, engraving being an operation that ſtands alone, excepting its being ſo far connected with block-printing, that the Engraver by making his obſervations on it, may ſee wherein he can imitate or

Digitized by Google

or excell it in any ſhape, and if he will look carefully over the Rules for putting on the block, and even for cutting, he will find many of them which may be made uſeful to himſelf. For inſtance, Rule 2 points to the neceſſity of well conſidering how to transfer the effect of the pattern from the paper to the cloth; Rule 4 points to the conſideration of what are the moſt ſtriking features of a pattern. Rule 6 directs the attention to the preſervation of an even face; Rule 10 is often neceſſary to attend to; and Rule 17 particularly ſo, if he has any thing to do with dark ground plates. Rule 23 may probably be uſeful in reſpect to two or three colour plate-work. Rule 24 may be made uſeful in an inverted manner, that is, by taking care to keep ſtalks, or whatever elſe is to join, rather too ſhort than too long; as it is eaſier to lengthen when they may be rather too ſhort, than to ſhorten when they are too long. In ſome caſes where the ſtalks have to join to dark objects, the Rule may be of uſe as it literally ſtands. In ſhort, as one principle inculcated through this work, is, that expanded obſervation will form the baſis of judgment; the end of which is to attain certain points; an Engraver, by keeping that principle

Digitized by Google

in his view, may be able to educe ſome advantage from articles apparently very remote from his immediate department, and a ſtreſs is the rather laid on it here, becauſe it is ſometimes ſaid, a perſon may be a good Engraver without being able to draw well; but, not to draw well, in its general acceptation, includes a great deal, and perhaps more than is abſolutely needful for an engraver to Callico-Printing to know, it is however, inſiſted on, that unleſs an Engraver or Copper puncher* ſtudy in what effect conſiſts, as taking in taſte, ſpirit, expreſſion, &c. he cannot tell how to enſure it, much leſs produce it, if left to himſelf, or if his copy or pattern be not well managed: it may be true, there have appeared inſtances of good Engravers producing good effect, and yet not able to draw; but to this it may be ſaid, they muſt have had naturally the principles within them of drawing, though they have never operatively evinced it; and had ſuch perſons applied themſelves to drawing inſtead of engraving, it is probable they would have ſhewn it; but however, this for certain will be granted, that an Engraver can hardly be the worſe for being able to draw, and therefore to contend about the neceſſity or utility of it to an Engraver, or that a man can

* For this operation there is no fixed term, therefore if the above be an aukward one, it is begged to be excuſed, as the writer cannot find a better.

Digitized by Google

can be a good Engraver without it, is frivolous and a mere attempt to put the beſt face upon what the defenders of ſuch a poſition are conſcious muſt be a deficiency, whether originating from ſupineneſs, untoward circumſtances, or that kind of obſtinacy which hinders a perſon from calling forth or improving thoſe faculties with which he may be naturally endowed.

Immediately reſpecting the following rules, the writer intimates, that he purpoſely omits ſaying much of real engraving (treatiſes enough being publiſhed concerning it) as what he chiefly adverts to can hardly be called engraving; yet even in the preſent mechanical mode of proceſs, it ſeems very often neceſſary to adhere to the principle of engraving as adopted for Callico-Printing*, that is, in keeping three ſhades in view, for in the ſmalleſt modern patterns that are chiefly performed by punching, the keeping of thoſe three ſhades muſt be attended to*, as in

 the

* In the Hiſtory of Callico Printing at the cloſe of this work, ſee what is ſaid on the introduction of Engraving into the buſineſs, its progreſs, and the innovations it has undergone till this time.

* Strictly ſpeaking, the white cannot be a ſhade, but propriety muſt give way to arbitrary terms.—It

Digitized by Google

the firſt inſtance a light muſt be enſured, then a ſhade (which is beſt executed by diagonal lines) and then a ſolid; now in well proportioning theſe three articles, which conſtitutes, in general, the good appearance of this kind of patterns, it is neceſſary to be very careful (as obſerved above) that the white object, or whatever it is that is to appear white, riſes up or ſtands forward as it were, as in general that it is which gives a ſpirit to the whole; then to obſerve that the ſtrokes forming what may be called a ſhade, be not ſo open as to cauſe a coarſe appearance on the cloth, or ſo cloſe as that the impreſſion of them will form a maſs: And laſtly, That the ſolid part be juſt ſufficient to give (according to the nature of the pattern) a proper weight, or finiſh to the whole.

---

is here ſaid too, that this circumſtance muſt be attended to in the firſt inſtance;—that is, in the drawing of the pattern, hence this obſervation, and perhaps others, may ſeem more properly belonging to the deſigner, but it is the rather inſerted here to induce Engravers (as well as the Writer has endeavoured to induce Printers and Cutters) to look a little farther than to their immediate departments.

Digitized by Google

Rules, &c.

1. DIAGONAL ſtrokes are always beſt for working, as they are the leaſt likely to be injured by the action of the doctor: horizontal ſtrokes are the worſt, being ſoon torn up.

2. Shades ſhould ſtand clear of each other, that the work appear not as a maſs of colour, from the common circumſtance of its ſpreading, which in general, is according to the texture of the cloth; hence borders for fine lawn, or other handkerchiefs, admit of neater engraving than for cloth in general.

3. Two many points ſhould not come to a centre as fig. 103, as thoſe the moſt horizontal would be worn out ſooner than the reſt; as likewiſe from the confluence of the ſhades, the colour will ſpread and appear in a body further from the centre than deſired.

4. Inſtead

Digitized by Google

4. Inſtead of objects ſtanding in dark grounds, as fig. 104, there ſhould be ſomething between them as fig. 105, to break the action of the doctor.

5. Great care ſhould be taken as the work goes on, eſpecially if it be a cloſe pattern, that one part is not heavier than another, particularly if it be a ſmall or cloſe trail, to which nothing more contributes, than keeping the bevil of the graver alike*; the depth of the engraving ſhould likewiſe be attended to, that in repairing a plate, if rubbing down is requiſite, it does as little injury as poſſible.

6. In

* The proficient may probably ſmile at ſuch directions, as if every Engraver ought not to be well acquainted with theſe circumſtances: but the Writer all through the work, begs every one to carry in mind that it is not proficients he ventures to adviſe, though he frequently recommends matters to be retained by them in memory: in fact, the work itſelf is more as a remembrancer, than a guide or an inſtructor, and as a remembrancer it may be an aſſiſtant to all.—See the latter part of the Introduction.

Digitized by Google

6. In ſolid ground patterns, objects ſhould not ſtand wide apart, as the ground by the action of the doctor will be gone ſooner than objects, or more properly the work within them.

7. In reſpect to punches, the firſt circumſtance to attend to is, whether the impreſſions they are to make, or parts of an impreſſion, are to ſtand alone or to have fine, coarſe or ſolid work that is done with the graver, join to them; for, excepting ſome caſes, as perhaps where a ſtrong outline may be required to a ſlight or faint filling, the impreſſion made by the punch and the ſtrength of the engraving ſhould be proportioned, as in the inſtance of dark grounds; for in this caſe, if the outlines of the punch be ſharp and fine, the impreſſion that it will make in the copper will be much ſooner worn out than the ground, the engraving for a dark ground being generally very ſtrong and deep.

8. Punches ſhould not be larger than fig. 106, it being very difficult to uſe large ones, ſo as to make an even impreſſion with them, and they ſhould

Digitized by Google

ſhould be as little ſolid as poſſible :—If however, the object be too large to be done with one punch, two or more different punches to form the object had better be made.

9. Punches with coarſe bodies or thick lines will cauſe the copper to riſe about the edges, therefore in ſome inſtances the graver has double work to do, hence the punches ſhould be ſo wrought as to form outlines, which are to be filled in with the graver.

10. There being always more or leſs trouble in the trial of every new plate, on account of the joinings, the fixing the plate to the ſlider, &c. it is recommended to the proprietor or worker of every preſs, the following expedient for the preventing of ſuch an inconvenience, ſimilar to what is offered for ſquaring blocks.

When you have a plate that exactly accords to that part of the roller as intended, whether a quarter plate, on a half quarter one, or both; and it

Digitized by Google

it is likewiſe exactly cut on the ſides for the purpoſe of being ſcrewed or otherways fixed to the ſlider, let there be made at the four corners of the ſquare of it, and in as many intermediate diviſions as can be made convenient, fine holes drilled through it, as ſtraight as poſſible; then, whenever another plate is to be made uſe of, that and the plate which has the drilled holes, are to be laid face to face, and with a fine needle prick through the drilled holes in the plate that lays uppermoſt to the plate that is beneath (taking great care that neither of the plates be removed) and at the ſame time, as carefully mark, according to the notches already cut in the ſides of the uppermoſt plate, where they are to be cut in the other; thus will the ſquare of every plate (intended to work at the ſame preſs) be alike, without the Engraver having the trouble (as is uſually the caſe) of ſquaring every plate, to ſay nothing of the chance of a miſtake; and thus likewiſe will every plate be adjuſted to the preſs with as little inconvenience.

The writer is aware, notwithſtanding what he has above ſuggeſted, that it may be neceſſary ſometimes to twiſt or turn the plate out of its ſquare direction, to render the work more accurate.

Digitized by Google

rate; hence it ſeems better to be adjuſted to the preſs, after being engraved. And this brings to his recollection a caſe, where a ſtripe quarter-plate was obliged to be twiſted near a quarter of an inch out of the uſual ſituation; the ſquare being in the direction as fig.ooo therefore the ſtripes could not join without that twiſt; but had that plate been ſquared from a ſtandard plate, perfectly ſquare and adjuſted to the preſs, the circumſtance would not have happened; and this is a proof (in the writer's opinion) of the needfulneſs of adopting ſome ſuch mode.---- See the ſame expedient as before offered for ſquaring a block.

Digitized by Google

The Writer now concludes (at leaſt for the preſent) his ſuggeſtions on Deſigning, Putting-on, Cutting, Printing, and Engraving, with again enforcing what he recommended at the beginning, and has ſeveral times repeated (though probably to ſome the repetition may be tireſome) that in every part of the operation, the ſucceſſive ſtages, and the appearance of the work as for ſale, ſhould be kept in view; and that every drawer, cutter and printer, ſhould conſider the operation under his hands, ſo connected with, or dependant on each others reſpective branches, that unleſs attended to in that light, the laſt ſtate cannot exhibit an appearance which is undoubtedly deſired, or even an appearance that will do credit to any part of the operation; as an imperfection in one part only, muſt diminiſh the value of the whole; and is the more to be regretted (at leaſt in the writer's opinion) if proceeding from the circumſtance of one perſon having, ſomehow or other, got his work out of his hands, without being able or willing to conſider what other operations it has to go through, or in what manner it may be affected by them; and therefore, as every one muſt allow it is better

to

Digitized by Google

to prevent faults, than having to remove them, the writer has endeavoured to be as particular as poſſible in the ſubject of putting on the block; as the more attentively that operation is performed, in adapting it to the circumſtances that are to follow, the after-proceſſes are more likely to ſucceed.* As for exquiſite neatneſs of drawing, (except in particular caſes) the writer does not lay ſo much ſtreſs on it as many do; he himſelf ſeldom affected it;† it has its merits undoubtedly; but (as ſpoken of in the beginning of this work) it only has it, ſtrictly ſpeaking, when united

---

* See the introduction to putting on, ſhewing the neceſſity of an operation being accommodated with true and other conveniences.

† As to putting on the block, the Writer owns he never very much deſired to have any thing to do with it, not from thinking it beneath him, but from a thorough conviction of the difficulties and other diſagreeable circumſtances attending it, together with the great probability that after the utmoſt care, the effect at laſt, from cauſes which cannot be always foreſeen, would not be as intended.

Digitized by Google

united with more generally eſſential properties, and which in fact includes the conſideration of almoſt every article which he has mentioned, as well as others which he may yet exhibit; and adverting to what he has ſo often recommended, and indeed but juſt alluded to, namely, the acquiring a general knowledge of the buſineſs, and in virtue of that knowledge looking to the ultimate effect, let it be remembered by every one, that indolence and inattention will fruſtrate the beſt formed precepts and cleareſt diſplayed rules; and that he who would acquire fame, or profit, muſt be vigilant; and if he be fortunate enough to have ſome track pointed out to him, he will look on all ſides, as well as directly forward; and not only take advantage of every encouraging circumſtance, but will even make obſtructions and difficulties uſeful to him, by ſtimulating him to freſh and more vigorous exertions towards attaining the object in view, and of courſe reaping the credit and recompence due to ſuch efforts and ſuch perſeverance.

In

Digitized by Google

In fine, bringing to a point all the positions or principles which the writer has been endeavouring to inculcate, be it remembered, by every one, that

HE WHO WOULD EXCELL MUST EXERT HIMSELF.

HE WHO WOULD BE GENERALLY USEFUL, MUST ATTAIN A GENERAL KNOWLEDGE.

IN THE PERFORMANCE OF ANY WORK THE LAST STAGE SHOULD BE ALWAYS KEPT IN SIGHT.

IN EVERY OPERATION, SOME RULE SHOULD BE OBSERVED, BUT THE APPEARANCE OF IT SHOULD BE KEPT BACK.

And laſtly

EXPEDITION IS THE LIFE AND SOUL OF BUSINESS; BUT SLUGGISHNESS OR PRECIPITANCY ARE EQUALLY ITS SUBVERSION.

Digitized by Google

ADVERTISEMENT.

The next Part will contain the proceſſes of copper and field-work, colour-making, account of drugs, chemical proceſſes, &c. ſuggeſtions for a new mode of printing; an Eſſay on the mutual attention due from maſters and men to each other.---Hiſtory of Callico Printing, including biographical ſketches of the moſt celebrated Printers, Deſigners, and others.---The ſtate of country-work.---Remarks on the principal patterns lately exhibited, &c. and other matters not prudent yet to announce.

† Several articles will be given with the next part, in order to be transferred to this, that have occurred ſince the printing of it.

---

§ *It is here intimated that a work, diſtinct from this, is under contemplation, reſpecting Callico-Printing, which, as it will probably be expenſive, Propoſals for publiſhing it, will be offered as ſoon as poſſible.*

Digitized by Google

Digitized by Google

A

TREATISE

ON

Calico Printing.

Theoretical *and* Practical:

Including the lateſt

PHILOSOPHICAL DISCOVERIES

—any way applicable:—

ACCOMPANIED

With SUGGESTIONS

Relative to various MANUFACTURES.

Emulation without envy,
Method without formality,
Expedition without precipitancy.

VOL. II.

Printed for C. O'BRIEN, Bookſeller, Iſlington;
and ſold by BEW, Paternoſter-row:
RICHARDSON, Royal Exchange:
MURRAY, Fleet-Street:
And the Bookſellers of Mancheſter,
Glaſgow, Dublin, &c.
1792.

Digitized by Google

Digitized by Google

Of Copper-Work, Fielding, and Colour-making.

HAVING treated of the operations carried on within-doors, the writer now proceeds to his Suggeſtions on thoſe executed in the Copper houſe, and its appurtenances; or, as it is uſually termed, the work without-doors; in which, though not preciſely proper ſo to arrange it, he ſhall include Colourmaking, (1) from its affinity to Copper-work and Fielding; but in treating of theſe departments, where he addreſſes himſelf to the Workmen generally employed in them, he is aware of having to encounter prejudices of the worſt kind; for, to ſpeak freely in this caſe, as well

(1) Colour-making in ſome reſpects may be conſidered as among the firſt proceſſes, or at leaſt previous to printing (as obſerved elſewhere) but, as there may be occaſion to introduce various conſiderations with it, that, by their length, would rather break in upon what is exhibited as a ſeries of mechanical proceſſes, it will be ſpoken of in a ſeparate ſection further on.

Digitized by Google

well as he has hitherto done, (2) the generality of coppermen, and head fieldmen, and he will add, colourmakers, may be deemed as little acquainted with the principles of their reſpective branches, or indeed of being able to conſider them in any theoretical view, as laying a foundation for the practical part, as any other claſs, and perhaps leſs ſo, ſince moſt of them originally were little better than attendants in the copperhouſe, or colourhouſe; hence their conceptions go little further than to a certain mode of operation, the only one they have ſeen; and it naturally further follows, that good or bad, improveable or not, they rigidly adhere to it; or, to make uſe of a more common form of ſpeaking among ſuch perſons, they only proceed by weight and meaſure, (3) (ſimilar to many cutters not having an idea

(2) See the Introduction, where ſuch freedom is apologized for. It may however here be added, that had the work been of a more general or public concern, ſuch particulars would probably not have been noticed.

(3) Weighing and meaſuring are in many caſes abſolutely neceſſary and convenient, but numberleſs circumſtances concur to render deviations from fixed

or

idea beyond the mere drawing, or printers beyond the pitch-pins) and according as they proceed in this formal manner, they conclude their judgments unimpeachable; and their operations perfect; and every ſuperior knows when once he has to contend with his Copperman or Foreman of the Field, he ſeldom gets any advantage by mere dint of argument; for where is there one who has been a long time in the buſineſs, but

---

or impoſed rules oftentimes fully as neceſſary; and this it is that requires, as in every other proceſs, an underſtanding beyond a merely mechanical or practical one: As for ſpeaking ſo apparently lightly of Coppermen and Field Foremen, it is not from the agreeableneſs of it (and general poſitions will not hold good in every ſhape) but chiefly to induce ſuperiors not to be *very much* ſurprized, when they commit blunders; but, on the contrary, to conſider that it would be wonderful, from the reaſons adduced if they did not; and thus on that account, induce ſuch ſuperiors to exert themſelves the more to attain that kind of knowledge reſulting from a cloſe inveſtigation of the principles of each department, in order to enable them (as ſo often recommended in this work) to account for failures when they happen, and prevent their happening in future,

Digitized by Google

what will ſay in ſuch a caſe? that he has ſeen enough to know as well as any one.

As for copperwork, the principle of it is but ſimple, though the various circumſtances that occur in the practice render it really of conſequence; the grand points depending on cleanlineſs, and the neceſſary degrees of heat, and if the obſervations on theſe objects be brought into ſome plan, and attended to in the operation by the copperman, he ſeldom is in very great danger of failing; (5) nearly the ſame may be ſaid of the Foreman

(5) Taking it for granted, that the preceding proceſſes are perfect, the drugs and other articles proper, and making allowance for accidents that the utmoſt carefulneſs cannot prevent, or what is ſtill more impoſſible to guard againſt, the wanton or miſchievous diſpoſitions of too many; ſimilar to what is ſaid in a note at the end of the ſection on pitches.—See likewiſe the hints offered to the colour-maker about printing, &c.

Speaking of accidents that cannot be guarded againſt. At a printing-ground in the country, it happened that for a long time moſt of the pieces that came off the parks were more or leſs ſtained of a yellowiſh caſt, and conſiderable was the loſs ſuſtained by it, and which could not be accounted for, till at

Digitized by Google

Foreman of a Field, his inſtruments are, ſunſhine, air, and water, and an attention to their effects on what is entruſted to his care, is to determine his proceedings.

It is not doubted but it may hurt many Coppermen and Foremen, that affect much conſequence, to obſerve, that in ſome principal grounds common men only are employed at the coppers, and even in the colour houſe; the Superior himſelf or a Superintendant giving the neceſſary orders, and attending to the beginning and cloſing of each proceſs; (6) not but that it is perhaps neceſſary

---

length it was diſcovered that a Rabbit-warren being near the place, the rabbits in the night, in running over the parks, ſtained the pieces with their urine, or, perhaps more properly ſpeaking, the alkaline quality of the urine diſturbed the printed colours.

(6) The advantage ariſing from an attention of this kind by the Principal, is in reſpect to well-cleanſing the work, and the proper degrees of heat. To the credit of perhaps the firſt Printer in the vicinity of London, this is obſerved by him, and the end is accordingly anſwered; for though the ſtile of work (to this time 1789) in reſpect to the drawing, &c. is not

Digitized by Google

neceſſary to have a principal perſon, where the buſineſs is on a ſcale ſufficiently large, in each of theſe departments, as well as in every other to receive orders, and diſpenſe the ſubordinate directions : (8) this, however, cannot always be done,

---

not of the firſt rate, yet the brightneſs of the colours, and clearneſs of the ground ; in ſhort, the execution of it altogether, in reſpect to printing and colour, gives it a claim to much commendation.

(8) Principals do not always ſee it, but it rarely is the caſe where there is a chief copperman and foreman of the field, that they agree ; for one will interfere with the other's department ; and when any ill accident happens in the out door work, that cannot be eaſily accounted for, each is ready generally to lay the blame on the other ; though perhaps neither of them is in fault. Of which the following circumſtance may be a proof, as well likewiſe, as of that deficiency of knowledge ſo often complained of among workmen, from looking no farther than to their own immediate operations.

The pale red of a number of pieces being flown, when they were taken up, though the deep red was as it ſhould be ; an inquiry into the cauſe of it followed

Digitized by Google

done, perſons proper for the occaſion not being always to be procured; neither is every Principal competent to diſtinguiſh thoſe that are ſo; but if he himſelf has a knowledge of the principles of the different departments, there is not much occaſion for leaving the whole of the proceſſes to others, provided he is not of that claſs who ſhrink from trouble, or expect to proceed without any cauſe for anxiety.(7)

Adverting

lowed of courſe: The copperman laid it to the foreman of the field, and he laid it to the copperman; both of them veterans in the buſineſs; but it was plain neither of them could account for it, not being able to look beyond their reſpective ſituations; for the cauſe reſted in the pale red being ſightned with paſte, an allowance of adequate ſtrength not being given of the non-colouring drug, and the printer from a certain circumſtance hitting the ground but ſlightly, little colour was therefore imbibed by the cloth, and conſequently it ſoon flew off.---See colour-making.

(7) The writer here, according to the latitude he has allowed himſelf, of ſtepping out of the track to make remarks, cannot help obſerving, and wiſhes the obſervation may have weight where it is directed, which is, to thoſe who not bred to callico printing

or

Digitized by Google

Adverting now immediately to the different proceſſes conſidered in this ſection, it is again obſerved, how difficult it ſeems to be to ſpeak of this work, or arrange the different articles in it, very methodically in regard to the proceſſes ſucceeding each

---

or to any of the branches, precipitate themſelves into it, on a preſumption that their own natural ſagacity or general knowledge of buſineſs, will enable them ſoon to conduct it with eaſe and advantage: but, ſo complex is the buſineſs of callico printing, in comprizing ſo many branches that may be called diſtinct profeſſions, and thoſe branches running into other diviſions; that few who have been all their lives in it are equal to the management of it; to ſay nothing of the rediouſneſs of ſome of the proceſſes; the uncertainty that attends the ſucceſſive ſtages; the remoteneſs of time from the firſt operation to the laſt; the caprice of individuals or of faſhion; heavy expences, and other numberleſs inconveniences owing to its peculiar complicatory eſtabliſhment: hence, it may be ſaid with confidence, that not one in ten who has thus precipitately, or even deliberately, entered into it, without the neceſſary preparatory knowledge, but has ſoon found ſufficient reaſon to repent his ſo doing.

The obſervation may be even carried to the ſitu-

Digitized by Google

each other; for in one reſpect, the firſt article treated of ſhould be mentioned as preparatory to printing, but ſubſequent to it in another, ſo that the conſideration of colour-making, maddering, &c coming in between, muſt break any arrangement whatever, and from this conſideration, it was at firſt intended to ſpeak of bleaching as a diſtinct ſection, but being in callico printing ſo connected with the colouring part, and not ſo well underſtood as by the term preparation, it muſt be introduced as well as the circumſtance adduced will

---

ation of thoſe who with a knowledge of the buſineſs enter into it, without being able to form ſuch connections as ſhall uphold it, and hence, as a word of advice, if it may be permitted to be given, let every one enſure ſuch connections before he enters in it, as it is not always found (as hinted before in a note in the ſection of pattern drawing) that good drawings and work anſwerable to them will alone be ſufficient, even if a large capital is not wanting. This idea could be purſued further, were it neceſſary, as it takes in the conſideraion of acquaintanceſhip, intereſtedneſs, dependancy, &c. which in every ſtage of life tend to form thoſe connections that mere merit will not always command.

Digitized by Google

will permit; and that ſeems to be, and which will accordingly be adopted, by introducing the principal operations with theoretical ſuggeſtions, & ſubjoining others, as notes, that are more diſtant. It is however apprehended that what is advanced will in general appear more like a deſcription of the proceſſes, than as an analyſis of them, or as reducing them into a ſeries of rules, like what has been done in the diſplay of the preceding articles, but here the circumſtance is different, as a number of common labourers are employed in each diviſion, taking the work continually out of each others hands, ſo that in fact there are as many diſtinct operations as there are operators, therefore a regular chain of rules cannot be laid down for each to obſerve; and if it were poſſible to arrange it as the writer wiſhes, or to bring the ſyſtem in all its parts into one point of view, it could only come under the cognizance of the principal, or whomſoever he appoints; and principals (as often ſaid) are not thoſe to whom this work is only addreſſed.

It may be proper to intimate, that in the Directions, &c. reſpecting the operative parts, thoſe points were chiefly attended to in which different practitioners nearly agreed; for, as two or three times obſerved, what renders the difficulty great

in

Digitized by Google

in treating ſubjects of this nature, is, that the diſcuſſion appears no farther reaſonable or proper to any one perſon, than as it is reconcileable to his own ideas of practice; and there are ſeldom two who agree in the ſame mode; hence, it is endeavoured, rather than dwell upon certain little practical circumſtances, to give ſome general theoretical hints, as tending to convey what is ſo very much wanted among the majority of thoſe to whom this work is addreſſed, that is, ſome idea of the principles on which their operations depend, as ſuch a knowledge, if it can be conveyed, every one muſt grant will more lead an operator towards ſome perfection in his profeſſion, than merely exhibiting a heap of practical directions, or diſplaying a number of preciſe rules, as all the experience attained from long practice will never form the adept, without a theoretical knowledge.

OF

Digitized by Google

Note, *In the following ſuggeſtions, phraſes and words not in common uſe, will be as much avoided as poſſible, and more familiar ones ſubſtituted; ſuch as* oily *for* oleaginous—thick or clammy *for* glutinous *or* mucilaginous,---various *for* heterogeneous, *&c. A Gloſſary will be however annexed, explaining thoſe words that could not with propriety be altered.*

Of Bleaching.

Or, as it is uſually termed Preparation.(10)

THOUGH Bleaching in a general manner as practiſed among profeſſed Bleachers, does not in every reſpect come under the conſideration of Callico Printers, it may not be improper to

(10) Meaning among printers that theſe proceſſes are neceſſary for preparing the cloth to be printed; hence in printing-grounds the terms bleaching or whitening is confined to laying goods on the graſs, and more particularly after printing. It is hardly needful to ſay that bleaching, ſtrictly ſpeaking, means whitening, by whatever method it is performed, therefore perhaps ſomewhat forcibly applied here, as it is not always that cloth ſent down wants whitening.

Digitized by Google

to ſay two or three words concerning it; two or three occaſional references to it will therefore be given, ſubjoined as notes, rather than by introducing them in the body of this work ;(11) as

(11) Wool, ſilk, flax, and cotton, poſſeſſing naturally an unctuous quality, it of courſe follows that they muſt undergo certain proceſſes, in order to diveſt them of that quality, or it will prevent their imbibing any colour (cotton, however, has this quality but in a very ſmall degree) and this proceſs is termed Bleaching, in general; but as particularly applied, it is called ſcouring of wool, ungumming of ſilk, whitening of thread, &c. and for this purpoſe it is found neceſſary to uſe occaſionally acids or alkalies. Alkalies act moſt powerfully, becauſe the ſubſtance to be removed is of an oily nature; and they are uſed either in a pure ſtate, or elſe as a ſoap. Acids are afterwards uſed, for the purpoſe likewiſe of whitening, and to clear the cloth or other body of what alkalies do not remove. For cleanſing wool, ſtale urine is made uſe of, which being alkaline, and combining itſelf with the oily quality of it, forms a ſoap, and produces the deſired effect. Silk, naturally of a yellow colour, is boiled in ſoap and water, rather than ſubjected to fixed alkali, becauſe of its being an animal ſubſtance, and hence more liable to be corroded; it is likewiſe in general farther whitened

Digitized by Google

as what Callico Printers perform in this way is chiefly Aſhing and Souring, and in a manner rather peculiar to themſelves, as eſtabliſhed by cuſtom,

---

tened by ſulphur. The whitening of flax, linen, &c, is however performed with fixed alkali, as the noxious ſubſtance is more difficult to be removed than from wool, or ſilk. Lime is uſed by many bleachers, though exploded by others, particularly in Ireland, from its cauſtic power, when uſed alone.

Sour milk. whey, or an infuſion of bran, or rye-flour, and other acids, ſuch as verjuice, lemon juice, &c. were formerly only in uſe, but oil of vitriol, marine acid, and other more modern improvements, have now the preference.

The antients cleanſed their wool with a plant called by Pliny, radicula, and by Linnæus, gypſophila Struthion, the ſame which is called in the ſhops ſoap wort, uſed likewiſe for fulling, and taking out various ſpots; it is ſtill uſed in ſome parts of Spain

Digitized by Google

cuſtom rather than founded on principles; the arrangement of the proceſſes will therefore be as moſt generally practiſed, where the articles are intended to be printed, for perhaps no two grounds purſue the ſame modes, even in eſſentials.

REMARKS, &c. (12)

In the firſt place, the pieces ſhould be ſorted according to their qualities of texture and, as nearly as poſſible, their degrees of foulneſs; for much indeed depends on it.----See the note below. *

They are then to be ſoaked (generally all night) in a receptacle entirely free from whatever might ſtain them; and ſo contrived, that a freſh ſupply of water may be admitted when needful, and the foul drawn off, or the ſcum would ſubſide and be injurious.

The

Spain, inſtead of ſoap, the pellitory and marine convolvulus; likewiſe the peplos or white ſpurge, theſe plants abounding with a kind of cauſtic milky juice. —See more of the antients in the ſection of Colour-making.

(12) Formerly, in this proceſs of ſteeping, rye-meal, bran, or ley was uſed with warm water, to produce a fermentation, in order to diſplace the foulneſs, chiefly contracted from dreſſing the threads with tallow and other articles, previous to weaving. But the practice is different now.—See the retroſpect, and notes 6 and 7 to it.

* Printers are here aſked, whether the *confounding* circumſtance (ſee note 32) of goods printed alike coming up different in the copper, is not often owing to improper aſſortments in this caſe? and whether, in poſſible caſes, cloth of the ſame ſort intend

Digitized by Google

The receptacle, it perhaps need hardly be ſaid, ſhould not be covered with a plain board; but with one cloſely perforated, and that it be rather ſecured by poſts placed betwixt it and the joiſts, rather than by weights; but if weights or weighty articles are uſed, they ſhould not be of iron.

Reſpecting water, ſee the laſt note to maddering.

See likewiſe note 21 to general reflections.

It is however, here juſt ſaid, if it be alkaline, ſyrup of violets turns it green. If acid, it turns it red. If aluminous, oil of tartar thickens it. If muddy, allum precipitates the foulneſs: if it contain iron, galls blacken it, &c. But above all, to procure pure water, a ſtil ſhould be kept in every colour-houſe.

Of Aſhing. (13)

OF this operation it may be ſaid, and in which conſiſt the eſſentials of Bleaching, that it removes ſome ſubſtance which is the cauſe of cloth appearing brown; and as the whole depends on knowing its nature, in order to apply what will combine with it, and ſeparate it from the threads, with the leaſt injury, Dr. Home* made various experiments, the reſult of

---

intended for the ſame pattern, had not better be all prepared at the ſame time, and put by ſeparately?

(13) Called bucking or boiling among profeſſed Bleachers, and by them the cloth is, or was, laid down and watered: But with Callico Printers they are generally laid almoſt looſely on the graſs. Tho' as obſerved (notes 12 and 21 to General Reflections, and elſewhere) new modes will perhaps ſuperſede the preſent; great addreſs however will be required to introduce them in England into general practice, and certainty of effect.

* See Dr. Percival's Eſſays and 2nd Volume of Phil. Tranſ. of Mancheſter Society.

Digitized by Google

which was, that, after evaporation, an oily dark coloured ſubſtance was left, of an inflammable nature; and, on further experiments, it appears to be compounded of a viſcid oil, and the earthy particles of the flax.

It is thought by ſome, that bleaching with lime may be rendered advantageous; lime having more power in whitening than vitriol has, but (as juſt ſaid) at the ſame time it is more dangerous if uſed alone; but with about one part mixed with four of aſh, its cauſtic quality may not be ſo effective.

It is a remarkable circumſtance that ſome articles manufactured in India, and brought over unbleached, cannot be made white here. Another circumſtance is, that May Dew quickly whitens cloth, and of this it has been obſerved, that immenſe numbers of inſects are formed in the ſubſtance left after evaporation, and theſe undergo very rapid changes; but how far, or in what manner ſuch circumſtances affect the cloth, remains to be determined.

REMARKS

Digitized by Google

REMARKS, &c.

There is no need for this operation when goods are ſufficiently clear and white, and aſhing pieces that are ſo, can only be of ſervice to take out greaſe or any thing ſimilar to it; but when they are uniformly brown, or brown threads are here and there viſible, they certainly ſhould undergo the proceſs; therefore, in this caſe, give them a few ends in the aſh liquor, and attend the operation with great care, that it be effectually performed; for if it be not, it cannot be done by ſouring, much leſs by winching or planking; and if they are ſuffered to go to the madder copper without having undergone this proceſs ſufficiently, or if any greaſy or oily quality remain in them, (14) or if there be any part brown, the maddering cannot have its due effect; for, as that brownneſs is a particular ſubſtance in the cloth, that from its nature muſt prevent the ſtriking of the colour, no one need be told that the maddering muſt be imperfect, if it be not removed.

Take

(14) It once happened that ſo trifling a circumſtance as the ſkinning of a dog ſpoilt ſeveral pieces, they having been laid, after ſouring, on the place where he was ſkinned.

Digitized by Google

Take care that the water be not ſuffered to boil, before the aſh is put in, and in that ſtate it ſhould be continued ſome time, and the aſh ſhould not be put in till near the beginning of the boiling, let it then boil for about ten minutes or more, obſerving to ſtir the aſhes frequently from the bottom.

The ſtrength of the ley, and the gradation of heat muſt be well attended, that the texture of the cloth be not too violently acted on by the aſh; and the more effectually to imbibe it, it ſhould be opened by degrees; for ſimilar to common waſherwomen obſerving in putting linen, eſpecially body linen, into boiling-water, that it fixes the dirt; or, (what is to be ſure more remote) in culinary proceſſes, in order to boil vegetables green, not putting them into the water till it boils, ſo here it may be ſaid, the oily quality in the cloth would be in a manner cloſed up within it, by the cloth being immerſed in boiling water.

It is however neceſſary to be careful that the cloth is thoroughly dry before it is put in the liquor, otherwiſe the ley will not enter ſo readily into the body of it; for if it be wet the action of the ſalts will not be ſo powerful on the internal

ſtructure

Digitized by Google

ſtructure, nor anſwer the purpoſe of diſlodging the filth by the aid of the water; but, on the contrary, will act more on the ſurface, and probably do the cloth ſome injury.

With coarſe cloths there may not be ſuch danger, through the water boiling before they are immerſed in it, as with fine ones, from the openneſs of the texture; but the precaution before given, is abſolutely neceſſary to attend where the texture of the cloth is fine or flimſy.

After this operation, the goods muſt be perfectly cleanſed from the aſh, by ſoaking them in a cradle, and winching them in a running ſtream, clear and free from any mineral impregnation; then take them to the planks, or ſomething ſimilar, till deemed ſufficiently cleanſed; next lay them down to whiten, and after being taken up, rince them, and get them ready for the ſour kettle.

Of

Digitized by Google

Of Souring.

BLEACHING with ſour milk or vegetable acid, not being in uſe now among Callico-Printers, the mineral is here chiefly ſpoken of; of which mode it may be obſerved, that it unqueſtionably took ſome time to get into general practice, vitriol being of ſo corroſive a nature it might naturally be expected to injure the cloth very materially.

But experience has ſhewn, that by being properly weakened, generally ſo much that it is not ſtronger than vinegar, and may even be drank, that conſideration has therefore vaniſhed. As for vegetable acids, formerly ſo much in uſe, that cart-loads of lemons, crab-apples, &c. were frequently brought into printing-grounds, all contain a portion of oil that prevents the effect being gained ſo eaſily as by the vitriolic acid: The milk ſours in vogue among bleachers, likewiſe gives way to the vitriolic; for with this acid no fermentation happens in its not tending to putrefaction; but milk ſours naturally tending to corruption,

Digitized by Google

corruption, if through inattention it ſhould happen while in contact with the cloth, it muſt damage it as well as undiluted vitriol; in fact, milk may be corrupted before it is uſed. Beſides, milk ſours take ſeveral days to perform its taſk, while vitriol ſouring is done in a ſpace of time no way comparative; but above all, its effect in whitening is the great point in its favour, the abſorbent particles in the cloth imbibing it ſo immediately, that the effect is very ſoon attained.

This operation, beſides contributing to the whiteneſs of the cloth, is deemed generally needful for the purpoſe of clearing away ſtains occaſioned by ink, iron, or other articles, which water alone would have little effect on; it likewiſe forwards the whitening of the cloth, when laid down after printing.

REMARKS

Digitized by Google

REMARKS, &c.

What article to uſe in this operation, whether mineral or vegetable acid, muſt depend a great deal upon diſcretion, or other circumſtances; vegetable to be ſure is now diſuſed among printers in this proceſs,(15) but ſtill the modes in uſe are ſo various, that any particular one cannot be inſiſted on; thoſe moſt uſually adopted are by the vitriolic and marine acids; the proportions moſt generally about 2 gallons of vitriol to a kettle or upwards of 100 gallons of water, and this quantity is enough for 8 pieces of 28 yard 4-4th wide, or the ſame number of pieces of 21 yards 5-4th wide; but this depends on the ſtrength of the ſpirit, and even on the goodneſs of the water; likewiſe the quality of the goods muſt be conſidered, chiefly in reſpect to the ſtrength of the warp, and theſe circumſtances are to regulate the time neceſſary for the proceſs(16); The heat of the water is alſo of conſiderable import, for if too hot it takes away from the acid its proper

(15) Except for the purpoſe of diſcharging colour when uſed in printing.

(16) Very various is the time, different coppermen, or their employers will allow; it is to be

Digitized by Google

proper energy, as it is the acid only that is ſuppoſed to operate in this caſe, the water being uſed only for the purpoſe of weakening it. By the water being rendered warm the vitriolic particles muſt the readier enter the pores of the cloth, the

done in a quarter of an hour, but very frequently a conſiderable time longer is allowed; but a point to be obſerved, and which ought to regulate it, is knowing when the acid has had its utmoſt effect, for keeping the cloth in beyond that time, every one muſt grant is unneceſſary, and to a certain degree injurious. Similar to the above obſervation, it may be added, that the quantity of any article uſed in any of theſe proceſſes, is as much undetermined; and even the neceſſity of ſome of the proceſſes themſelves, but that ever muſt be the caſe, while drugs, and the articles they are employed on, are of ſuch different qualities, and the uſe of them governed by other circumſtances of œconomy, cuſtom, prejudice, &c. hence it is more ſafe to ſpeak in a general, than in a ſpecific or poſitive manner, and hence what is here ſaid of the proceſſes are called remarks, &c. rather than rules. Galling was formerly much uſed, but goods for printing being now of a ſofter texture, and a purer quality in general, it is nearly exploded.

Digitized by Google

the pores being by the action of the warm water rendered more open. (17)

If the souring be repeated, the acid should be diminished, from the texture of the cloth being opened by each preceding process; so that the oily particles which blunted the acids are nearly removed, and the alkaline and absorbent earths occasioned by the ashing, if ashing were used, are easily washed out.

The goods then generally are cleansed in a back lined with lead, and if they are not foul, the liquor may be used again in the kettle.

After these operations, they must be well cleansed by winching and planking, or some other similar process, then run them between the squeezers, and as usual hang them on the stakes, or in the drying-house, previous to being calendered. (18)

For

(17) A Thermometer is certainly best for the purpose of ascertaining the warmth of the water, some mens' hands being so hard, that their sense of feeling in this instance can hardly be a criterion.

(18) In respect to the modes of cleansing goods, it is amusing to think of the various ones that have been adopted by battledores, stocks, wash-wheels

Digitized by Google

For goods that are to be printed in chemical colours, or that are to be brought up in ſumach, or american bark, no preparation is neceſſary, unleſs the cloth is evidently too foul to paſs without. (19)

---

and the like, moſt of which tend conſiderably to injure the cloth (this however is a circumſtance very likely not much deſired to be prevented by printers) but it does not appear abſolutely certain the effect is ſo much produced by ſuch violences as by the action of the water; hence the waſh-wheel may be ſaid to have the preference; the waſh wheel, though, like other improvements of the day, has probably had its turn; for much miſchief may happen if it be not attended: The dumb planker or *wooden-man* now ſeems to have the preference. But after all, a plenty of water, with a good falling force, well directed, and the cloth kept in proper motion, would be better than any of thoſe violent methods, eſpecially if ſome goods be ſuffered to remain a little time in a ſoft ſoap ley, (of no very conſiderable ſtrength) and afterwards ſufficiently rinced and thoroughly dried.

(19) The complaint againſt colours brought up in ſumach, or bark, is that a good white is not procured no more than a good black (as ſpoken of before) and conſequently that courſe of work is confined to cloſe patterns. The writer however has ſeen a ſlight fielding uſed with ſucceſs, in light ground work.

Digitized by Google

Of Calendering.

RESPECTING this operation, it has been intimated, how needful it is to be well performed, and that very much depends on it; it may however be here ſaid, that the chief care is to keep the weſt as much as poſſible in the ſame ſtate as when woven, that is, in reſpect to the direction of the threads; the omiſſion of which, even when work is folded to go for ſale, is evident in many patterns. As for inſtance, if a piece be calendered ſo badly, that the threads lay all very obliquely acroſs the table, and the pattern be of a ſquare ſet kind, it muſt be clear that if printed on in ſuch a ſtate, and in the courſe of the following proceſſes, the cloth gets into its original ſtate, the work will appear juſt in the ſame oblique direction, as the ſhoot of the cloth did when it lay on the table; and inſtead of the object being of a ſquare kind, it will appear more like a diamond, which is almoſt making a different pattern of it, and in the inſtances of ſmall ſprigs or other ſet objects, it muſt greatly tend to throw them out of ſhape and their proper diſtances.

The

Digitized by Google

The general inconvenience of calendering in reſpect to printing is, that the cloth in paſſing between the rollers naturally ſpreads or expands more or leſs according to the cloſeneſs or eveneſs of the rolls; hence after printing, in proportion to the quantity of colour uſed, the cloth gets into its natural ſtate, and is generally found to contract the moſt lengthways, ſo that it is often very difficult to get grounds in, eſpecially if the print be long; and therefore it is deemed needful to ſtretch it, particularly when work off the graſs is to be performed.

In the operation of printing, which follows, an article is uſed that much concerns ſome part of the copper work, which is lamp black, other articles are uſed in ſightning, but none are nearly ſo pernicious, though all are hurtful in a degree; but ſomething muſt be uſed at times for that purpoſe; the conſideration of theſe articles however, come more immediately under the colour-makers department, and of courſe will be ſpoken of in another place.

Digitized by Google

Of cleanſing Goods,

previous to Maddering, or boiling off.

THE goods being now ſuppoſed to be printed, and properly ſtowed or dried, they are to be ſnitchelled or folded, and brought to the copper-houſe; which being done, throw them into a copper of bran liquor made warm, and winch them as quickly as poſſible, otherwiſe the colour may ſtart or run,(20) but this depends very much on

(20) The term colour muſt in this caſe, be uſed here, as well as elſewhere, though improperly, it being, ſtrictly ſpeaking, the non-colouring article combined with the thickning or ſightning, for the colour is not produced till the work is in the copper.—See the note at the beginning of colour-making.

In ſome places the goods are put on a roll or winch before brought to the copper, and put into it, as turned off from the roll.

Digitized by Google

on the nature of the thickening or ſightning; for if either be of ſo looſe a kind, that it is quickly removed, the operation, it need hardly be ſaid, will be as quickly performed; but if of a contrary quality, it conſequently takes longer time; this circumſtance of the quality of the thickning or ſightning, is however not what every copperman looks at, or even ſometimes whether there be any ſighting at all, (21) though if the goods are properly and thoroughly cleared, it perhaps is little matter whether he knows the difference or not; but if he regulates his clearing by time, that is, by uniformly allowing ſo much time to a copperfull, let the thickning or ſightning be of any quantity or quality, he may be much deceived; for, (as ſaid before) ſome kinds of ſightning are more difficult to be cleared than others, as well as ſome kinds of paſte-work; or will bear the water

(21) The vehicle (or thickening) for carrying the allum, &c. they muſt be ſuppoſed to know of, as there can be no preparation matter on the cloth for their proceſſes without it. A copperman, however, may be deceived in ſorting the pieces, as ſome with heavy ſightning may not have ſuch deep or heavy colour as others that have no ſightning.—See the article maddering.

Digitized by Google

water more heated;(22) hence in this caſe, a deal depends on the copperman's judgment, and in this inſtance it therefore behoves him to be attentive, as well as in the next operation of dunging, for if carried too far, in reſpect to heat, the certain conſequence muſt be ſome deſtruction to the work in boiling off.(23)

---

(22) Here is included the reſinous paſte uſed in printing, and where paper preſervatives have been uſed.

(23) With tender or pale colours it is a material matter that all the pieces of the ſame pattern be equally dried, for ſuppoſing a piece to be boiled off with a bare ſtowing and another of the ſame colour has been in a hot ſtove ſeveral days, there certainly is a chance of the colours of the two pieces varying.—See note 8 and more to this effect addreſſed to the colour-maker.

Digitized by Google

Of Dunging. (24)

THE uſe of this operation is ſaid to hinder the white part of the cloth, or that part wherever it may be, which is to appear white, being ſtained by the ſuperfluous colour, or according to the uſual phraſe of coppermen, it is to guard the colour, and prevent marking off: this however will not be the caſe if too many pieces, particularly if the work is heavy, be entered in the ſame copper, and which may very eaſily be accounted for, as it is poſſible the copper may contain, after ſome pieces are entered, beſides the dung, a ſolution of mineral and other ſalts, from the quality of the thickning or ſightning, or other ſuperfluous matter that may be diſſolved or diſunited in the copper; and which may mix with the acting power of the dung, and cauſe ſtains. In this operation, by letting freſh water into the copper, the encreaſe of the liquid will cauſe the foul ſtuff to run over.

Something likewiſe may be obſerved, reſpecting the dung itſelf, according as it is gathered in, whether as taken up in a freſh ſtate, or when dry, or having remained a long while on the ground;

or

(24) It is thought the volatile alkaline particles of the dung, prevents the particles of the colouring drug from too copiouſly entering into the ground, (which is what is ſuppoſed to be meant by guarding the colour) and that of courſe they will chiefly be imbibed where neceſſary.

Digitized by Google

or whether in an almoſt liquid ſtate by urin or urine; as theſe circumſtances muſt more or leſs affect it in the quality; for, be the effective principle what it may, it certainly muſt vary according to the different ſtates in which it may be gathered: but whatever may be the caſe in that reſpect, care muſt be taken that the copper be not made too hot (as before ſaid) eſpecially if the dung be freſh and pure (if the word may be allowed) its effective quality being then of the greateſt power, and, if the paſte or ſightning be not entirely got rid of, the action of the dung will diſturb the colour, and prevent the madder from ſtriking as it ought.

As to the operation itſelf, after having filled your copper, proportion the dung to the work, in general, about 3 jets to 2 pieces, giving them about 40 ends in the copper, as quick as poſſible; the water that you impregnate with the dung muſt only be ſufficiently heated, in order gradually to looſen the colour; and as it much depends on the ſuperfluous matter being eaſy to be removed or not (as juſt obſerved) it muſt of courſe be carefully attended, and the proportions muſt be varied accordingly. After this operation, the goods muſt be winched and well planked, or otherwiſe cleanſed; they are then, according to th

Digitized by Google

the quality of them, to be ſumached, and then ſnitchelled off, and waſhed.

In ſumaching, proportion the drug to the courſe of the work, for which, as is often ſaid, certain circumſtances prevent giving preciſe rules, (25) ſometimes indeed ſumach is not neceſſary, and ſometimes in common work it may be uſed with the madder, as it is ſuppoſed to aſſiſt it.

---

(25) So here it may be ſaid, though weights and meaſures may be deemed ſtandards, yet coppers, pails, &c. cannot, as being of no regulated ſizes; and to ſay a little or a great deal, a proper quantity and the like, are but comparative terms, and conſequently indefinite.—See note 3.

Digitized by Google

Of Maddering.

TO ſpeak theoretically of this operation, is applicable to any other, where by means of ſome preparing ſubſtance, a colour is communicated to the cloth, that water nor any other liquid (not corroſive) cannot ſoften ſo as to remove, nor the action of the ſun reduce to a calx, or other ſtate, ſo that it eaſily goes off another way:

Of the Hypotheſes reſpecting the operation of fixing colour, none are deemed abſolutely deciſive and ſatisfactory, the theory however as generally accepted will be here diſplayed.

It is firſt of all noted, that the particles of whatever ſubſtance is uſed to colour any article, ſo that it is durable, are not ſoluble in either of the uſual menſtruums (26) whether water, ſpirits of

(26) In menſtruums, or diſſolving liquids, three things are needed. 1ſt, that the parts of the body attract the particles of the menſtruum more powerfully than thoſe are attracted by each other

of wine, or alkaline lixivia; caused by their adhesion to certain gummous and resinous substances, but are liable to be disengaged by whatever has a greater cohesive power, such as allum or tartar, to which the colorific particles of madder, woald, &c. adhere:---But in whatever manner such saline articles act, they fix a colour, that, in general, can be no otherwise obtained; as to those solutions which of themselves form the colour without such preparation, which some certain vegetables do, their effects are attempted to be accounted for, on a supposition that they contain a tenacious, glutinous, or other adhesive quality, with which the cloth, or whatever else it may be, being coloured, can never be removed, when once thoroughly dry: But it is supposed, in every colouring process, by means of boiling, that the colouring particles find admission into the pores of the cloth, which are opened by that operation being previously cleansed by the preparatory salts, and that afterwards contracting by

---

ether. 2d, That the body have pores adequate and open to the particles of the menstruum; and, 3dly, That the cohesion of the parts be not so strong, but that they may be torn asunder by the violence of the dissolving particles rushing together.

Digitized by Google

by the cold, they retain theſe particles; and which are further ſecured by a vitriolated tartar, lining them, as it were, with a cruſt or what is termed a coagulum, which coagulated matter is generated or produced from the allum, &c. conveyed to the cloth by printing, and the colouring particles they imbibe; this, as ſaid before, is the generally received idea: it is however here obſerved, that from what is hypothetically advanced, it ſeems as if heat were abſolutely requiſite to open the pores for the reception of the colouring particles, but in the inſtances abovementioned of the juices of ſome certain vegetables and other ſubjects, giving a perfectly faſt colour without heat, an objection ſeems to lay againſt it. (27)

Among other hypotheſes concerning the adheſion of colour two or three will be here mentioned

(27) It is ſaid, a falſa only will not diſſolve, when once chryſtallized. Tartar as it comes from wine caſks, and that made by a vitriolic ſalt, and one already alkalized, or which will become ſo when deprived of its acid. Dr. Lewis in his notes to Neumann's Chemiſtry, oppoſes this hypotheſis; it is likewiſe diſproved in the Chemical Dictionary, on a ſuppoſition that fixed alkalies will effect what is here ſaid, and that the vitriolated tartar can be diſſolved.—See obſervations reſpecting Indigo, the ancient purpura, &c. in the ſection of colour-making.

Digitized by Google

tioned, though the above it is clear, muſt hold the firſt rank, at leaſt till a better can be adduced.

According to ſome, the fibres of cloth, ſilk, &c. are tranſparent tubes, into which the colouring particles entering are there formed into a kind of cruſt, plainly appearing through their tranſparent encaſement; others think theſe fibres are ſolid lengthways, but are outwardly full of little pores exceedingly cloſe to each other, into which the colouring particles enter and are there ſecured; while others think they are entirely ſolid, or at leaſt not provided with theſe cellular pores, but that the ſalts intended to ſtrike the colour corrodes them, ſinks into them, and unites with their colouring properties; or elſe, that the colouring is performed by a coagulation of the colourific matter itſelf, whatever that quality may be. Thus, it may be obſerved, ingenious men frame concluſions, formed undoubtedly upon reaſonable grounds, which from the confined portion of penetration that we have reſpecting the internal properties of things, they are glad to embrace ſooner than acknowledge an incompetency of knowledge: (28) however in regard

(28) In this, as in other caſes, it is impoſſible the mind can carry its powers ſo far into the internal

gard to what is advanced above, the grand teſt is air and ſunſhine. But as in conſidering the article of colour-making there may be occaſion to ſpeak

---

ternal conſtitutions of ſubſtances, not obſervable by any phyſical operation, as poſitively to ſay, that ſuch things act on each other in ſuch a manner as tending to eſtabliſh the principles of any operation; therefore in ſuch caſes our reaſoning is only by inference. But, the further we go in our mental reſearches, we form more abſtract hypotheſes; till, at laſt, our inferences becoming almoſt fanciful, we talk of inviſible operations, and conſequently have recourſe to agents of an imaginary formation, to execute them.

This comment may probably ſeem preſumptuouſly trifling with the ſentiments of very great men, but whoever peruſes chemical works will find how freely each ſucceeding writer treats his predeceſſor reſpecting remote theoretical points. (See the preceding note, and notes 30 and 37 to colour-making where the theory of colouring cloth, &c. is diſputed) and the ſame may be obſerved reſpecting experimental proceſſes, in ſucceeding writers complaining of inaccuracy or miſtatement.

The above, however, muſt not be underſtood as

Digitized by Google

ſpeak further on this matter, little more will be ſaid here; what is advanced being deemed ſufficient as leading to the operation itſelf.

As the point of moſt concern in maddering is the quantity of madder uſed, it will therefore be ſpoken

---

invalidating all theory, or ſetting aſide the principles of operations; the conſideration of which is, and will be particularly enforced further on: but only as laying a ſtreſs on thoſe points that are not deemed ſubtleties. For notwithſtanding, the modern diſcoveries ſhew fire, air, water and earth, not to be primary ſubſtances, they may here be ſtill held as ſuch, as our practical knowledge muſt commence from their operations on other ſubſtances, deemed ſecondary ones, or as they enter into their compoſition: ſo, in the theory of colours, whatever may be ſaid of the nature of thoſe ſubſtances that help to produce them, reaſonable poſitions and practical knowledge can only commence from that point at which they begin to exhibit their effects.—See note 1 to the retroſpect at the end of colour-making.

N. B. In the preliminary ſuggeſtions to Fourcroy's Chemiſtry, the ſcientific contention above alluded to, among moderns

Digitized by Google

ſpoken of, as well as the criterion that ought to determine it (which conſideration is equally applicable to aſhing and ſouring) (29) and is the more deſired to be noticed, as it is on this point that Coppermen as well as their Principals, ſeem ſo undetermined: ſome contending for the propriety of allowing plenty of madder, and others being as ſtrenuous for reſtricting the quantity; and conſequently neither can act with that certainty of effect which conſtitutes the value of any operation.

In the firſt place (according to the principles, which will be more fully diſcuſſed further on) it is not merely by allowing a large quantity of madder

---

moderns reſpecting the new theories is diſplayed. See likewiſe an abſtracted view of the ſame, prefixed to the chemical compendium in the ſection of colour-making, and Note 9. to the ſame.

(29) This chemical or philoſophical mode of conſidering the matter, was intentionally avoided while ſpeaking of theſe operations (ſee the retroſpect at the end of colour making) for, in fact, it is of ſuch a nature, that few common coppermen can be ſuppoſed to have any conception of it, all they talk of is the *ſcald.*—See note 31 further on.

Digitized by Google

madder that the effect is the more enſured; but the grand point to decide it by, is the knowledge of that affinity or attraction one ſubſtance has to another. For here, the queſtion is, how far will the ſalt or aſtringent uſed in printing, act upon, or attract the colouring particles? (30) As to the liquid in the copper being apparently coloured, it is not in conſequence of the particles being to the higheſt

(30) In the article of colour making, this is more fully treated. The writer however does not here affect to point out how to make thoſe diſtinctions, he only points to the neceſſity of conſidering about them, convinced that a Printer of a philoſophical turn, might turn what is ſaid to advantage. For though a ſcheme was abſolutely formed for that purpoſe, yet on reflection, as ſome might think it would be exhibiting too much, it was laid by, at leaſt for the preſent: but it may nevertheleſs be ſaid, that the proper criterion, is regulating the quantity of madder by the quantity of the aſtringent uſed; as according to the quantity uſed in printing any number of pieces, ſo ſhould be the quantity of madder, weld, &c. in proper proportion.

The above ſuggeſtions, it has been ſaid, are equally applicable to aſhing and ſouring; and on the ſame

Digitized by Google

higheſt degree blended or ſaturated with it; (31) as they are only divided and ſuſpended, and muſt ſo remain till ſome other ſubſtance immerſed in that liquid attracts and retains them, in conſequence of being able to unite with them beyond the power which the liquid has. For, notwithſtanding ſome may ſay, there ſhould be a ſufficient

---

ſame principles it is advanced by Dr. Home. See notes 3 and 7 to the Retroſpect, with the text belonging to note 3, that in ſouring among bleachers by profeſſion, the foulneſs, or rather the abſorbent earths left in the cloth after the alkaline proceſs (aſhing) ſo much attracts the acid particles, from having a greater affinity with them than with the water, that thereby the water at length becomes quite taſteleſs.

It is added, merely as a remark, this binding or fixing the colour, is reverſing the proceſs of preparation; as the liquid there, impregnated with a ſaline ſubſtance, attracts and joins the unctuous ſubſtance in the cloth; but here, the ſalts previouſly applied to the cloth, attract and join the unctuous colouring ſubſtance, ſuſpended in the water.

(31) For they cannot poſſibly unite with it to the point of ſaturation from their unctuous quality.

Digitized by Google

cient or equal impregnation of the water by the madder, whether work be light or dark, yet that can only be under a ſuppoſition that the particles fall and reſt on the aſtringent juſt as they would on any other place, only that they would be there fixed: but the aſtringent particles are here ſuppoſed to have a certain ſphere of attraction, acting on every colouring particle that comes within that ſphere, and uniting with it accordingly. Therefore the quantity of madder, whether the work be light or heavy, ſhould be according to what is likely to be attracted by the aſtringents, the reſt being conſequently ſuperfluous; which always muſt be, while the cloth is not all over impregnated with the ſalts, or the whole capacity of the copper not filled with the cloth: as in this inſtance, it muſt be clear there will be more colouring particles than will come within the ſphere or force of the attraction of the aſtringent particles.---See note 31 in the ſection of colour-making.

It may be obſerved that in ſome caſes without the uſe of preparatory ſalts, this attraction is greateſt with the cloth itſelf; but then the particles

Digitized by Google

ticles are not permanently fixed.---See notes 26 and 41 in the next ſection.(32)

In order to illuſtrate what has been juſt ſaid, ſuppoſe ten pieces printed with the ſame object, either large or ſmall, in deep red; ten more in the ſecond red; and ten more in the paleſt. Now here, it is not becauſe there appears the ſame body or maſs of colour in one as in the other, that an equal quantity of madder is neceſſarily alike for each ten pieces, for, if there be barely enough to bring up the paleſt, there will not be enough for the ſecond, and ſtill leſs for the darkeſt: and, inverting the rule, by having a ſufficient quantity to bring up the darkeſt, there will be more than ſufficient for the pale ſhades, and conſequently ſome madder will be waſted, from the attraction not being ſo ſtrong in the pale ſprigs, through their containing a ſmaller number of aſtringent atoms, as in the darkeſt ſprigs which have conſiderably more. The

(32). This wonderful property of affinity in Chemiſtry is deemed different from the Newtonian grand doctrine of Cœleſtial attraction; the former acting on ſmall particles proximate to each other, the latter on large bodies at great diſtances; and both theſe properties are diſtinct, in certain caſes, from terreſtrial attraction, the property of weight or principle of mechanics.

Digitized by Google

The above may be likewiſe inſtanced in a piece of pale blotch work, and a piece of dark; as in the dark blotch, there muſt be a greater number of aſtringent particles, and conſequently their powers of attraction more multiplied than thoſe in the pale blotch, from having a leſs quantity. In common engraved copper-plate work, this is evident in what is called the ſpewing of the colour; but it is particularly ſo, in the tinted work lately introduced; for whether done in black, chocolate, blue or olive, according as the colour is received by the cloth from the lightly tinted parts, it ſhews different ſhades; hence in theſe caſes, as the colour is not previouſly thinned, it can only be occaſioned by the aſtringent particles being more diſperſed than in the dark places, or in the grounds.

It may be ſubjoined that there are caſes where the copperman may be deceived in ſorting the pieces.--See note 21. Indeed it is here aſſerted, that the leading principle in copper work is properly ſorting them. As to the common wonder of printers, that pieces of the ſame pattern, colour, &c. do not come up alike, See colour making, under the article of the application of colour by printing.

REMARKS

REMARKS, &c.

In maddering, 3 certain diſtinctions ſhould be made, tho' the copperman as juſt ſaid, ſhould know how to make more according to the lightneſs or heavineſs of the work. The three alluded to, are dark grounds, cloſe covering work, and light grounds; but in this diſtinction it is impoſſible to aſcertain here what quantity of madder to uſe, as a copperman who has attended the previous proceſſes, if the cloth has been well managed in other reſpects (ſaying nothing about what has been juſt diſcuſſed) will bring up work with nearly half the quantity that ſome others will; for too many if left to themſelves, rarely deal out madder with a ſparing hand,(33) However, it

(33) At a certain Ground (the writer thinks Newton's) where madder is by no means ſpared, the Principal percieving one night a light near the Copperhouſe, found, on going thither, the Copperman in the drug-room, adding more madder to what had been weighed out for him; and it appeared, on enquiry, to be only for the purpoſe of inſuring his reputation as a Copperman, on the principle

Digitized by Google

it may poſſibly be ſaid, if it be of a good ſpending ſort, heavy work may require ſeven or eight pounds to a piece, and for light work from four to ſix. But all this, as obſerved reſpecting aſhing, ſouring, &c. muſt depend on diſcretion or other circumſtances; for written documents cannot provide for every courſe of work.

As to the general mode of proceſs, according to the ſize of the copper, the courſe of work, or dimenſions of the goods, tie up more or leſs, rarely more than ten of light work, but leſs of heavy: bring the copper to a ſcald (34) in about an hour

---

principle above mentioned, of thinking he could not uſe too much. It muſt be ſuperfluous to add, repeated circumſtances of ſuch a nature are of ſome pecuniary concern, eſpecially where much work is done.

(34) This term of a ſcald is much uſed by common coppermen, as they build their merit and certainty of effect on their judgment about it; and here undoubtedly they are right; though few preciſely know why: for in this proceſs, as well as in aſhing or ſouring, there is a certain inſtant of time when the

Digitized by Google

hour and a half, and keep it in that ſtate till the colour has ſufficiently riſen. With light goods this firſt ſcald will anſwer for ſumaching.

After this ſcalding, have them planked or waſhed, then enter them in freſh madder, and bring the water to a boil in about an hour; but great caution muſt be taken that the colour is raiſed

---

the effect is accompliſhed, which, chemically ſpeaking, is the point of ſaturation, (ſee note 16) and to carry the proceſs on further muſt be injurious, or, at any rate, ſuperfluous; which point of time is when the noxious or obſtructive ſubſtance is decompoſed or removed; from an aſſimulation with the alkali or acid then uſed.

In the fixing of colour, it is when the combination of the ſalts and colouring particles is formed; for, as in the preparation, if there be any alkali or acid remaining in the copper, after the noxious ſubſtance is removed, it either has nothing to act on, or it muſt act on the cloth. So in maddering, or welding, if the cloth be kept in beyond the point of ſaturation, or the water be too hot, the red or the yellow will probably be dingy, or otherwiſe injured as well as the other colours, from the colouring particles acting with other powers, than their merely colouring ones. See note 16.

Digitized by Google

raiſed before the work is taken from the copper: and it may be obſerved that too much boiling will extract a brown from the madder itſelf, which of courſe muſt debaſe the work.

After this ſecond proceſs, have them waſhed, then bran them, and after being well waſhed in the ſtream, ſtrike them off in the barrow, and have them ſnitchelled up for the purpoſe of draining previous to being laid on the parks.

Branning is ſuppoſed to ſmooth the ſurface of the colour, by removing intervening particles that might render it otherwiſe.---See note 6 in the retroſpect. (35)

After

(35) It is too common in the country, for purpoſes well known, to uſe logwood and brazil, and weld likewiſe in a mode not proper to diſplay; the work of courſe cannot be very reſpectable. But even this is better than the frequent flushed up colours, or thoſe pale ones, put in on a chymick principle, chiefly in work which is to be hurried up to town (ſee note 10 in the Retroſpect at the end of Colour-making) but theſe practices, it is hoped, for the credit of the buſineſs, are falling into decay,

as

Digitized by Google

After the proceſs of branning, the goods ſhould not be ſuffered to lay long in the heap, if they be, they muſt ſuffer from the fermentation that will naturally ariſe. (36) As to the proceſſes of ſumaching, woalding, &c. they being ſimilar in reſpect to ſtriking the colour, excepting that ſome

---

as more fully obſerved further on. As to branning but a few pieces at a time, it certainly is an improvement; as among the modes practiſed in the country (at leaſt more ſo than about town) goods are frequently branned ſo much white (and bran liquor may be converted into ſours in a certain time) as to be deemed ſufficiently paſſable: and indeed in ſome cloſe covering kinds of work, the goods may be ſo much branned, as to need little if any graſſing: but then (as juſt ſaid) ſuch work will always be diſtinguiſhed from that which has a good white.—See note 37.

(36) A natural conſequence of a heap of vegetable matters, as well as animal, laying together, according to their humidity, and their acid or alkaline qualities, is a heat ariſing in the middle, which by degrees ſpreading more and more, will at length putrefy or rot them; this inteſtine motion diſintangling the acid or alkaline quality from the earthy and

Digitized by Google

ſome articles give out their tinging qualities very eaſily, it would be almoſt a repetition to ſpeak of them. In rincing and ſtreaming of pencilled and chemical colours, the chief conſideration is throwing them in quickly and keeping them in motion; and eſpecially in ſtreaming, that the pieces be kept as clear of each other as poſſible till the work be pretty well cleared.

Cleanlineſs

---

and oily parts, that till then retained in them. Something like this happens in ſoaking white goods (as mentioned before) and it may here be added, that white goods as well as when finiſhed, ſhould not be piled up too damp, nor in too damp a place; and at any rate they ſhould be examined at times, or ſtains at leaſt will be the conſequence. It may even be ſaid, that the injury white goods may thus receive (as what are called mildews, are the firſt ſtages of putrefaction, or rottenneſs) may affect the preparation and printing.

The modern anti-phlogiſtic or pneumatic theory of Chemiſtry, including Dr. Prieſtly's celebrated diſcoveries, have thrown ſome light on the ſubject of putrefaction and its preceding ſtages; though ſtill it is far from being ſatisfactorily developed.—See the ſubject diſcuſſed by Fourcroy Vol. 3 —See likewiſe Higgins on the acetous acid, air, &c.

Digitized by Google

Cleanlineſs having been repeatedly mentioned, as a grand point of copper work, the copper man here is particularly adviſed to it in the firſt inſtance of ſupplying the copper with water, for if taken from ſome ſtreams, various matters may be brought down that may do conſiderable injury. And in ground reſervoirs or ponds, it ſhould be noted that there be no influx of filth of any kind, and eſpecially that they be not near ponds or other places where aſhed or foured goods are rinced, for fear ſuch foul waters find their way to them. (37)

---

(37) Speaking of what may come down in a ſtream, the following circumſtance which happened ſome time ago is quite in point. As a number of pieces were rincing, printed in chymick colours, to the ſurpriſe of the rincer, he found the colours changed. The cauſe on examination appeared to be from a quantity of aſh and other matters from the clearing of the coppers, coming down with the ſtream from an adjacent dye-houſe.

As the purity or certain quality of water is of great conſequence, whether for Colour-making, Copper-work, or Fielding, it is juſt intimated, that its gravity being generally in proportion to its purity, the common hydrometer will diſcover it.—In Bergman's works, his experiments on waters, in order to remove

Digitized by Google

remove impurities, and render waters fit for various purpoſes, are truly of importance to Callico-Printers, Dyers, and all who uſe conſiderable quantities of it; and in this caſe (as well as in others) if it were not from the fear of doing a particular injury, it could here be ſhewn, from experiments actually made by the writer himſelf, which Printing-grounds in the vicinity of London, are more or leſs fortunate in that reſpect.* In fact, it is matter of wonder this has not been more an object of enquiry among Callico-Printers and others, where the goodneſs of water is of ſome concern; eſpecially as little trouble and expence are required to render impure waters in certain caſes, and in certain quantities otherwiſe.

Perhaps the ſingular effects (as has been obſerved) of waters in India are owing to high degrees of purity, through a friendly interference of nature; and, as applicable to the ſubject, it is mentioned as no ſecret, that at a capital Printing-ground near town, the waters of a very copious ſpring, which for a time had been uſed for Fielding, were at laſt, by accident, found not to be ſo efficacious as the water that was rejected.— A Printing-ground could be

* *Among the works referred to, may be found the modes of doing it. If this is thought too expoſing, let thoſe who are not fortunate in this caſe, endeavour to remove the complaint; as the methods are there ſhewn.*

Digitized by Google

be even pointed out, where the waters are of a ſaline quality, and the ill effects even acknowledged.

To philoſophical men it is juſt hinted, that probably the modern diſcoveries reſpecting air, might be turned to ſome advantage in nice operations, if the wonderful properties of water impregnated with fixed air, be conſidered. But to expatiate further on theſe points would be entering into too large a field, the reader is therefore referred to the works mentioned over-leaf, or advertiſed at the end, for that information which would be perhaps awkwardly exhibited here if compreſſed.* Theſe remarks however, muſt ſhew the uſefulneſs of philoſophy, and the advantage the arts acquire where its aid is obtained: and hence the ſuperiority of many operations on the Continent, where ſuch a combination is encouraged: indeed, the merely mechanic arts cannot aſpire to improvement without it, nor proceed with certainty, even in common operations, from the very obvious reaſon of its implying the neceſſity of thinking as well as acting.

Theſe obſervations likewiſe include the great neceſſity of regarding ſituation, particularly in forming Bleaching or Printing Grounds; for, as partly obſerved already, it is morally impoſſible to command brilliancy of operative effect, if (beſides what is above intimated) they lay under diſadvantages ariſing from

* *Some particulars will be found preceding the Compendium of Chemiſtry.*

Digitized by Google

from denſe vapours, or groſs fuliginous matters, variouſly impregnating the contiguous part of the atmoſphere.—See ſomething to this effect notes 6 and 7.— In ſhort, without pure water, and pure drugs, operation is uncertain, and the effects diſcreditable.

N. B. Thoſe who deſire information on theſe heads, and others equally important, are here deſired to conſult Bergman's Chemical Eſſays on Air, Water, &c. Prieſtly on Air; Fourcroy's compendious ſtatement of General Theories and Experiments relating to them; Cronſtedt's Mineralogy; and Higgins on acetous Acid, Air, &c.

It is however here ſaid, that allum, ſaccharine acid, lime, galls, fixed alkali, &c. are the agents for detecting impurities, in waters; it is likewiſe ſaid, however ſtrange it ſeem, that vats and other certain receptacles of waters ſhould not often be cleared from the green matter that gathers on the bottom and ſides. And this obſervation may be perhaps applied to ditches, ſo the ſedgy matter is not floating, nor liable to be taken up with the gittern, as it is ſaid to imbibe the phlogiſton from the air.—See Prieſtly particularly.

It may not be quite foreign to this ſubject to add, that Dr. Prieſtly ſays the air which he procured from a Callico Printing-ground (moſt probably the Printing-ſhop) was the moſt offenſive of all the ſpecimens that he procured from different manufactories.—See ſomething to this purpoſe in Percival's Eſſays on the air of Mancheſter.

Digitized by Google

Of Graſs-bleaching, or Fielding.

HAVING ſpoken of bran-bleaching or ſouring as ſubſequent to maddering, and obſerved (in a note) that by the improved mode of branning but a few pieces at a time, a white is almoſt procured without laying the pieces down (though that it need not be ſaid is not proper to be done in all caſes) it remains now to ſpeak of laying cloth down to clear the ground or other parts, from the ſuperfluous particles of colour; it is therefore obſerved that this effect appears to be chiefly accompliſhed by evaporation (35) and moſt effectually in ſun-ſhine and moderately windy weather, the heat of the ſun opening the pores and thereby giving egreſs to the colouring particles, detained in them till then; but in dull wintry weather, it is well known, the proceſs of whitening goes on very ſlowly; there being no power by heat to diſlodge thoſe particles; for without it, watering is inſufficient; the uſe of that

(35) Perhaps inhalation by the air may be more proper, evaporation being more applicable to a chemical proceſs.

Digitized by Google

that operation being only to advantage when combined with the heat of the ſun; one power inſinuating itſelf into the pores of the cloth, and the other continually exhaling the watry particles, bringing away every time, ſome of the ſuperfluous colour, and leaving thoſe that by the action of the binding or contracting quality of the acids are with-held; though even theſe it is known, were the proceſs carried on too long, would be removed in ſome degree; eſpecially if the work conſiſt of pale or tender colours.

It has been before ſaid, that attention ſhould be beſtowed on the quality of the water, that it be light, ſoft, and free from filth; it likewiſe is neceſſary to attend to the quality of the ſoil of the field; for the facility and ſucceſs of the operation depend on the mutual action of heat and watering; therefore the drier the ſoil, or the more gravelly it is, the water will ſooner paſs through it, and the heat on the ſurface will not be ſo much oppoſed as otherwiſe. (36) Smoke or vapours from very foul boggy places, may be ſaid to be injurious, if frequent, and in great quantities.

It is noticed, that cloth does not get white ſo ſoon in windy weather as in ſtill ſunſhine; therefore, it appears that its influence penetrates the

(36) It is here offered as an opinion, that parks ſhould be ſloping from the middle.

Digitized by Google

the inward parts by its evaporating power, while wind only dries it, and in a manner prepares it for ſucceeding operations of watering; for wind alone, eſpecially if cold, would cloſe the pores of the cloth; but the power of heat naturally acts to the contrary; and in the caſe of evaporation, it ſeems the particles are partly diſlodged by water, and then finally drawn out as thoſe particles riſe up.

In many places on the Continent, ſtrange as it may ſeem, the printed goods are never watered, and to this dry bleaching it is owing that in moſt foreign printed goods, little colour is ſeen in the back, particularly in what is called Swiſs chintz; but then the texture of the cloth is unavoidably nearly deſtroyed.

It is a particular circumſtance to attend to in printing-grounds, where printed goods are watered (which the writer thinks is every where the caſe in this country) that the water be not hard, nor tinged by any mineral quality; one reaſon for not watering on the Continent, may be, the waters there abounding with mineral impregnations; indeed about London, work done in ſome places, is clearer in the white, from the ſuperiority of the waters; and it is well known the ſoil in general in the north, from its mineral

Digitized by Google

mineral quality, is unpropitious to producing a good white, and without a good white no work can appear perfect.— See note 6.

That a deal depends on the ſoil and water is further evident in the caſe of foreign articles, particularly ſome from India; for at a place called Seconge, the waters have, it is ſaid, a ſurprizing tendency to whiten the cloth, (37) and of courſe to render the colours more brilliant, hence goods are brought thither from diſtant places for that purpoſe, as likewiſe to two or three other places on the ſame account

(37) This may be conſidered philoſophically as well as merely mechanically, the ſenſation of colours being cauſed by certain reflected coloured particles, or rays of light ſtriking the eye, according as certain ſubſtances are diſpoſed to receive thoſe particles, thus, a bright colour lying by a dull one, the rays from each being intermixed with each other before they reach the ſight, the bright colour helps to enliven the dull one, and the dull one deadens the bright one, ſo in painting, it is not ſufficient that ſhadows be properly diſpoſed, but that every colour, according to its quantity or proximity to another, communicates a portion to the parts near it, receiving at the ſame time, according to the laws of reflection and refraction, a portion likewiſe from the other.

Digitized by Google

In managing the field-work, the great concern is to put those kinds of work in the same parcels, that will take the same time to be brought white; that in fine open weather they are kept regularly watered, particularly work with delicate colour, and that the water be kept free from sedge and other filth; the other common processes of laying down, (38) pinning, taking up, drying, &c. every common fieldman is supposed to be acquainted with, and therefore dwelling on those circumstances is deemed unnecessary.

Before this section is closed, it is repeated, and begged it may be remembered, that in respect to particular processes, little is offered as positive, the difference of thinking and acting among different practitioners rendering such confidence absurd (see note 16) but here it may be said, that the rejection or adoption of any mode of practice, is no further demonstrative of propriety than as it is, or is not, in consequence of a rational investigation of the object, therefore those who simplify any set of operations, (not from parsimonious views) but on the principle that nature uni-

(38) It is a pity this part is not better attended to, than it is in general, in preventing the ill-effects of high wind, as a little extra trouble would accomplish it, either by laying the work down in small parcels, or by means of moveable laths or ropes, or trees, hedges, &c. placed as screens.

Digitized by Google

univerſally obſerves in the ſources of her operations, is alone likely to ſucceed, and (as particularly obſerved further on in reſpect to experimental colour makers) deſerves credit even if he be unſucceſsful; for certain it is, that in all mechanical operations, as well as natural (however complex they may appear) there is a ſimple point, on which they all move, or from which they ſpring and branch out, and from this conſideration the man of acuteneſs and reflection, whatever may be the ſubject of his employment, will trace every part through its connections and dependances to this firſt movement, this eſſential point, this actuating principle, and thence back again to its ultimate intended effects, endeavouring accordingly to remove what is ſuperfluous, and ſupply what is deficient; while on the other hand, the man who proceeds in the vague uninformed manner, ſo often reprobated in this work, ſoon feeling his deficiency in this requiſite chain of knowledge endeavours to compenſate for it, by repeated alterations of every kind, merely in the blind hope of accidentally ſtumbling on what is proper. (39)

(39) Thus, in all chemical operations, they are to be traced to the agency of the four ſimple elements; and, to come quite home, in producing fixed colours on cloth; it is to be traced to the ſimple operation of an aſtringent.

Digitized by Google

Of Colour-Making.(1)

AS obſerved in the introduction to Copper-work, ſo here it is ſaid of this ſubject, that the chief intention in treating of it, conſiſts more in an attempt to enforce the conſideration of its principles, than in a wiſh to exhibit a number of recipe's or other ſimilar deceptive and inefficacious modes of filling up this publication: It is however begged to be noted, that

(1) There is no avoiding thus miſ-naming this operation, cuſtom has ſo eſtabliſhed it, for (as obſerved before) what is called colour-making is but preparing the means to procure the colour from the colouring materials. (in dyeing it is really and properly called the preparation) and even in chemick colour-making, where there is not the proceſs of boilings it is not always juſt; for even in that caſe the ſubſtance imparted to the cloth is not exactly what it will be in reſpect to colour when rinſed, or otherwiſe brought up; indeed ſome of thoſe caſes ſeems

that though in this light the ſubject is affected to be treated, it is not to be underſtood as addreſſed to the ſcientific reader only, for that would be equally uſeleſs in reſpect to thoſe to whom it is par-

---

ſeems an invertion of the proceſs, being, as in the inſtance of liming, brought up or ſtruck by a non colouring article.——See note 1, to Copper-work.

It is agreed that the art or myſtery of colouring various articles was in uſe among the ancients, and in ſome inſtances they excelled us, at leaſt it ſeems our mode of operation is but little different both in reſpect to preparation and finiſhing, though ſome parts of their knowledge is certainly loſt to us; it is however certain, that they uſed other ſubſtances to what are in preſent uſe; the preſumption of this being the caſe, is taken from the writings of very ancient authors, particularly the Greeks, and from ſome who have written expreſſly on the ſubject.

The Greeks, it is certain, diſtinguiſhed the operations of preparation and colouring, by terms exactly to the ſame import as with us, as relative to opening the pores of the ſubject of to be coloured, the conſideration of the colour, and then the fixing of it; and that in the practice aſtringents were uſed as amongſt

us

Digitized by Google

particularly directed; as Callico-printers and thoſe employed by them, have other conſiderations in plenty to attend, though people in general, and ſome theoriſts in Chemiſtry, think the whole buſineſs, or at leaſt the conſideration of it, is comprized in producing colours; but at preſent, moſt printers are contented with the mode as adopted in common, or elſe reconcile themſelves to it from not having either ability, opportunity, or inclination, to purſue it further; their view being to gain ſomething by what is known and attainable, rather than to devote much time to the uncertain effects of ſpeculation.

---

us. From them it is probable it paſſed to the Romans, and their colour-makers or dyers (for here the terms are to the ſame meaning) made uſe of a ſpecies of fucus, which fixed the colours as firmly as is done by any modern proceſs; this plant is to be found in this iſland, it is, however, not deemed proper for whitening of linen.

The uſe of allum, tartar, lime, and other aſtringents were known to the ancients, though perhaps not exactly for the purpoſe we uſe them; what is ſaid of them could be introduced here at length, but for reaſons ſeveral times given, it is deemed ſuperfluous.

Digitized by Google

tion. Of Dyeing, it may perhaps be ſaid, the chief matter to ſtudy and practiſe is this article of procuring and conveying colours; but before colour is conveyed to the cloth in printing, there are proceſſes to be obſerved and to acquire a proper knowledge of, more difficult to attain than the mere art of colour-making, according to the preſent accepted practice of it; and in truth, to ſpeak from a certainty, the imperfections of printing, and even the miſcarriages of printers, originate as much, or more, from their inattention to other circumſtances or departments, or their ignorance of them, than merely that of colour-making. See the obſervations on putting on, and at the end of the firſt volume.

It is however certain, notwithſtanding, that from the great number who practiſe it, and with ſome reputation, who have very little acquaintance with chemiſtry, there ſeems perhaps no neceſſity for it; yet in order to attain a proper knowledge of the principles of this department, it is indiſpenſably neceſſary (particularly with the affinities of ſaline and metallic ſubſtances) otherwiſe the practice of it muſt be attended with conſequences vague, tedious, and unneceſſarily expenſive.

However, be this ſtatement conſidered as juſt or not, the writer, as he has all along affected to

blend

blend advice with precept, ſhall preface what he has to advance reſpecting the conſideration of colour-making, by addreſſing himſelf to thoſe who are attached to making experiments, without any principles to direct them, which negatively may be of ſome ſervice; as by pointing out what cannot be done, and wherein ſo many have bewildered themſelves, it may ſhew the fallaciouſneſs of certain operations, and in conſequence divert their attention from that mode, which ultimately will not anſwer the deſired purpoſe.

As to laying down rules for making colour, or exhibiting a great number of recipe's for that purpoſe (as obſerved more fully in other places) it would not avail much, but on the contrary, might do conſiderable injury, by throwing out a ſtimulus to numbers who vaguely dip into the practice of colour-making, particularly in chemical proceſſes; and hence too frequently dedicate their time and attention to what in the end bring diſappointment and regret.

As to the modes of imparting colour to the cloth, the conſideration of them is reducible to a ſmall compaſs, as it concerns the principle of colour-making for Callico-printers, their prepa-

ratory,

Digitized by Google

ratory mixtures not running into that great diverſity, in reſpect to the number of ſhades, as among Dyers.(2) It may nevertheleſs be ſaid, that one part of Callico-printing is Dyeing, though not called by that name, notwithſtanding the colour is communicated but in a partial degree; dyeing being generally underſtood as colouring the whole extent of the ſubject, having previouſly immerſed it in the preparation liquid; but here a method muſt be uſed to convey this preparation (called colour, and by an operation called printing) to the cloth in certain lines, ſhapes and bodies, ſo that only ſhapes are viſible when the work is finiſhed; and here it is, that the ſkill of the Colour-maker is viſible; for though, by his memory or recipe's, he is informed that certain

(2) It is not here meant that printers are to be reſtrained in this reſpect; they undoubtedly wiſh for as many colours as they can procure; but the difference alluded to is, as obſerved a little before in a note, that the mere producing of colours, as with dyers, is not their only object, Callico Printers having to exhibit a certain deſign, conſiſting of flowers, figures, &c. on the cloth, therefore, unleſs the writer is very miſtaken, here is certainly a difference.

Digitized by Google

certain proportions of iron liquor, allum, ſacrum ſaturni, and ſo on, properly applied, produce certain effects; yet the many undeſcribeable circumſtances neceſſary to be attended to, render that department ſo extremely difficult to ſupport in a proper manner, that very few indeed are found adequate to it, (3) even where no attempts are made at improvements, ſearching for new colours, or more advantageous modes of mixtures; though in fact to attempt this (as hinted before) is the height of folly without a ſufficient knowledge of a chymical analyſis of what is already in practice; as without ſuch a knowledge, experiments muſt be inconcluſive, and there is little hope of advantage from them, but by downright chance; and this leads to obſerve on the many inſtances we have of ſuch experimental practitioners, and their little ſucceſs in proportion to the boaſts (4) that have been made of procuring

(3) See further on, where ſome hints are addreſſed immediately to the colour maker.

(4) Here the writer, in his uſual unreſerved manner, intimates the entertainment he has received when he has heard ſome Colour-makers in diſcourſe;

Digitized by Google

procuring durable colours by the ſimpleſt operations; that is, as muſt be underſtood by every one in the printing buſineſs, without being brought up in the copper; for it does not much enhance the value of that operator, who by ſome addition to the articles, with which another has produced a certain colour, or by ſome deviation, or retrenchment from them, if he can make it bear two or three more waſhings, for ſtill it cannot

---

courſe; what was generally advanced being mere boaſts of what each other knew beyond the reſt, without touching on the principles of colour-making; for almoſt every maſter printer and every colour-maker will ſay, and probably believes, he is poſſeſſed of ſome advantage in this caſe over every other; by which, to conſider it in a general manner, that is, in every one poſſeſſing ſomething extraordinary; it would ſeem as if on the whole nothing was wanting on this ſide perfection, but that is well known not to be the caſe; and it often happens, and every maſter Printer is appealed to for its truth, that when recipes have been purchaſed, it is rarely till after many experiments they derive advantage from them, and very often nothing can be made of them at any rate.

Digitized by Google

not be called permanent, though it may be deemed faſt enough. (5) But the principle of moſt chemick operations or falſe colours, being little more than certain ſolutions combined with certain ſubſtances; with which every dabbler in chemiſtry is acquainted with, it would appear like affectation to dwell much upon it; (6) every one of thoſe that make ſuch pretenſions will moſt likely talk highly of his recipe's and experiments; but great indeed is the experience requiſite to aſcertain the effects of chemick proceſſes, as that only can be done by bringing them into practice ſo as to execute a courſe of work with ſome certainty of the operations not failing.

It is far from the writer to wiſh to leſſen or diſcourage any laudable attempts toward any improvement, but thoſe whom he treats thus cavalierly, are of a claſs diſtinguiſhed in the printing buſineſs by an appellation too ludicrous to be here mentioned

(5) This phraſe is in every chemical printers mouth, and ſome deem it ſo, and perhaps in ſome caſes it is ſo, if it will endure two or three waſhings.

(6) See at the cloſe of this ſection a few thoughts on the probable effects of an univerſally adopted chemical mode of printing, if it could be attained.

Digitized by Google

mentioned, as it is not likely much ſervice or improvement can be educed from their vague experiments; as for thoſe who proceed on rational principles, whatever may be the fate of their reſearches, they are, and ought to treated with adequate reſpect; but if they do ſucceed, their reputation muſt be in proportion, as little progreſs is yet made toward the point deſired in proceeding, even on the moſt ſcientific grounds.

Purſuing this Idea further, ſome will undoubtedly ſay, who knows what may be produced from a number of experiments, if only by mere chance? as many diſcoveries originate more from accident than deſign; but ſtill, all this is not a ſufficient apology for making experiments without certain principles at hand to proceed by, for without them, the practice muſt be leſs pleaſant, leſs likely to be affective, and what is of great concern indeed, leſs likely to be attained with little expence; but here it unfortunately happens, that of the greater number of ſuch experimentaliſts, is included thoſe, who have a ſmattering of the practice from having been aſſiſtants to a colour-maker, or otherwiſe have caught the idea for the practice, and purſue it eagerly, though under every diſadvantage; another claſs is among principals,

Digitized by Google

cipals themſelves, who having ingredients at hand, ruſh into the practice of combining and compounding one thing with another, juſt in the ſame manner, and upon the ſame uncertain grounds; the conſequence, undoubtedly, is much anxiety and embarraſſment, with very little benefit: as for the idea (juſt mentioned) of ſomething turning up by chance, that is too abſurd to give it countenance ſo as to recommend a ſeries of experiments from ſuch a hope; but advice in this particular it is apprehended will not be of much avail, moſt perſons in this caſe, imagining that if they have but opportunities of making experiments or ſeeing the reſult of them, or what is ſometimes worſe, getting together a number of receipes, they may ſave themſelves the trouble of ſtudying the theory or principles of what they undertake; for the idea of ſtudying and ſtoring the mind with certain regular ideas, carrying with it that of much labour and time uſeleſſly employed, very few indeed by choice enter into it: but waving all this, it may be ſaid, that even in ſuch a vague courſe of practice, it would not be ſo diſcreditable or unprofitable, if either claſs, juſt ſpecified, regularly made a point of tranſmitting to paper

per the ſequel of their experiments, (7) as even that would be of ſervice, ſince by ſo doing, they might, at all times, ſee where and how they have failed, or where they have gained any advantage, and accordingly might afterwards proceed upon ſurer grounds: but even this is ſeldom done, though at all times neceſſary, under every circumſtance, indeed it cannot be of much uſe, unleſs the minutes are accompanied with proper reflections on the probable cauſes of their failure or ſucceſs.

To all this it may however be ſaid, there are many who cannot attend to ſuch a mode; in fact ſome practitioners are hardly able to write, and Principals

(7) This brings to the writer's recollection his having read a book, he thinks called Marſhall's Minutes of Agriculture; which in point of utility to the farmer, is a thouſand times beyond a dry ſcientifical diſquiſition of the ſubject; as it contains a great number of obſervations apparently tranſmitted to paper as they occur, ſome of importance, and ſome but trivial, (or at leaſt as might appear ſo to many) but theſe practical obſervations, as ſuch, muſt be evidently of uſe, and the more ſo, as they are adapted to the capacities of thoſe for whom they were intended to be uſeful.

Digitized by Google

Principals have in general enough elſe to mind to dedicate much time for that purpoſe; hence is another reaſon why little benefit is reaped from ſuch a chaos of uncertain or inconcluſive experiments.

After dwelling upon this inconcluſive mode of practice and the conſequent circumſtances, it may not be improper, by way of illuſtration, to intimate in a general manner wherein ſuch practices fail, and then a word or two will be offered as recommending a properer mode of proceeding.

It is firſt obſerved, that the ſubſtances capable of producing colours, are almoſt infinite; ſo that the field being very large, the mere dabbler has too much opportunity of fruitleſsly making attempts: Some ſubſtances give out colours that can be removed by ſoap, ſome will oppoſe that, but cannot reſiſt air; and ſome cannot be moved by either; now reſpecting ſubſtances that are not permanent or faſt (according to the common phraſe) and known not to be ſuch by a number of experiments; ſome perſons have endeavoured to improve on them by joining a durable one to them; blending them as intimately as poſſible, from a preſumption that the weak ſubſtance would

Digitized by Google

would have received assistance from the other; but it has always followed that the false colouring substance soon flies off, leaving the permanent one behind: Some have endeavoured to procure a permanent one, by first putting on a fading one, and covering it afterwards with a permanent one, on a supposition that the permanent one would secure it, and by being externally situated, might defend that beneath it or within it, or at least that it would operate in that manner for some time, so that there might be a little longer durability to the fading one, but this likewise will not answer; and in the practice of using acids, some by endeavouring to mix various ones together, without knowing their qualities or affinities, have found the effect of one destroyed by the effect of the other, like solution of tin and cream of tartar, or solution of tin and sacrum saturni, as the marine acid will quit the tin and join the saccharim, the acetous acid being at the same time suspended by it, is of no effect on the tin:— see experiments of this kind further on;—— others have had a notion that a mixture of different salts will keep the colours better; but it is proved to have a direct contrary effect: hence when they have acted in this manner, without any positive knowledge of the principles of this

part

Digitized by Google

part of chemiſtry, they have made ſuch a confuſed mixture, that it was impoſſible to know which ingredient, or what number of ingredients cauſed the miſcarriage; much leſs to know in which was the efficacious property ſought after. Now, in this caſe, it may be further ſaid, a neceſſary circumſtance is omitted, and that is, firſt of all to try what effect each ſalt has on the colouring ſubſtance in regard to their ſimilarity of effect or appearance, for in knowing this, there is the greater chance of ſucceeding. But, if perſons will plunge themſelves into a practice of making experiments, let them begin with making them firſt, with ſimple ſolutions or extracts upon ſeperate vegetable or mineral ſubjects, making ſuitable remarks upon each reſult; though even that will not be ſufficient, unleſs the qualities of the ſolution are alike, or a previous acquaintance with them be obtained, ſo as to know their different effects in point of ſtrength, or time of operation; and this implies an abundance of food for obſervation, from the various mixtures that may be made only of one article uſed as a baſis, if conſidered in its different degrees of ſtrength or purity, and the different ſubjects it may have to act on. However, by proceeding in this ſimple manner, they may

Digitized by Google

may then unite or multiply them. But if they proceed here in too precipitate a manner, they will preſently be bewildered, as it muſt be clear from the above ſtatement, even to an indifferent perſon, into what numberleſs channels the ſimpleſt mixtures of ſimple ſubjects with each will run; and much more ſo when compound ones are taken; hence without ſome clue in this practice, the ſame indifferent obſervers muſt as plainly ſee, that ſuch operators muſt very quickly find themſelves in an inextricable labyrinth, hemmed in with doubts and difficulties, and if they proceed, it will be more from a ſhame of going back, than from a hope of getting into any regular channel.

In proceeding now to the intimation of a more proper mode of making experiments, it is premiſed, that the conſideration of colours (as may be ſuppoſed) is exhibited only as relative to printing, hence it chiefly alludes to thoſe that are permanent or fading, as applied to linen or other ſubſtances of the ſame kind.

By

Digitized by Google

By permanent colours, every one in the printing line conſiders thoſe that are not to be removed by ſoap, ſun nor air; the others are of various kinds, as ſome withſtand waſhings, but will fly on the air; others will withſtand neither, and others only for a little time; but what is of the moſt concern is, that, with few exceptions, thoſe colours that are the moſt permanent, are the leaſt brilliant; though for this, it may perhaps be ſaid, that entering but into the ſuperfices of the ſubject made uſe of, the colouring particles are more crouded together; and conſequently exhibit their rays more glowingly than if more diſperſed or ſeparated; which muſt be the caſe when entered (as is ſuppoſed in the caſe of permanent ones) into cells adapted to receive and retain them; and the more compound the colour is in reſpect to its ingredients, it is the leſs vivid, and leſs likely to be durable.

As to what bold ſpeculatiſts, or even experienced practitioners may ſuggeſt, our knowledge of the nature of colouring ſubſtances is very limited; or if we know ſomething of any ſubſtance in one ſtate, that ſubſtance, when ſeparated, will preſent a new appearance in its ſeparated parts, and ſo on ad infinitium; hence,

Digitized by Google

likewiſe is our knowledge very ſmall indeed in judging or determining on the reſult of thoſe applications of one ſubſtance with another, for the purpoſe of diſcovering or fixing of colours. In ſimple proceſſes, inſtances are very rare of permanency, but of any combination of ingredients, when one article ſeems to bid defiance to the great proofs of air and ſun, there is the object for inveſtigation; and therefore in colour-making, a great point is to diſcover thoſe articles that naturally poſſeſs thoſe permanently tinging qualities, or that can eaſily, and in the ſimpleſt manner be procured by a combination with ſome other.

As it is not certainly known, nor perhaps will it ever be, why ſome colours fade, and others will not, ſuppoſitions have been formed, ſpecious enough (as already exhibited) though they are received not as being indiſputable, but only as the beſt or moſt rational that can be given.

The moſt remarkable inſtance of ſimple ſubſtances for giving out their colour, as it were ſpon-

Digitized by Google

ſpontaneouſly, was in the tyrian dye, (8) which had power enough of itſelf, ſimply to communicate to ſilk and ſome other ſubſtances, a colour as firmly as can now be procured by any proceſs whatever: Other inſtances are in the ſolutions of indigo and ſilver; the latter when mixed with chalk

(8) In the Spaniſh ſeas is found a ſhell-fiſh that reſembles the antient purpura, the purple dye is in its throat; Cloth of Segovia is dyed with it, and bears a high price. The colour from the fiſh when firſt laid on linen, is a light green, which by the air is changed to a dark one—in a few minutes to a ſea-green—a little while longer into a blue—from that it turns to a purpliſh red—and in an hour or two to a deep purple; here the ſun has no more power, but by waſhing it in ſcalding water and ſoap, and drying it, the colour ripens to a beautiful bright crimſon.

The Americans of Peru and Chili had knots of wool, which by the variety of their colours ſerved for characters and writing; the knowledge of theſe knots was called *quipos*, and was one of their greateſt ſciences.

The Otaheiteans procure a beautiful crimſon by mixing the yellow juice of a ſpecies of fig with the juice of fern.

Digitized by Google

chalk turns the ſediment to a purpliſh black when expoſed to the ſun, or rather the action of the ſun's heat is the cauſe; the other circumſtance reſpecting indigo, is perhaps more known to callico printers, in the ſolution at firſt appearing green, but on expoſure to the air turning to a blue, as obſerved in another place.

Having ſpoken of the vague and inconcluſive operations of many, the following diſplay of the inſtitutes of chymiſtry in view of eſtabliſhing one on a firmer baſis, is humbly offered, which will be followed by a few thoughts immediately relative to the practice of what is the ſubject of this ſection.

It has been ſaid, that an acquaintance with chemiſtry is indiſputably neceſſary for a colour-maker to have, but it muſt be underſtood not in every diviſion of it; as chemiſtry, in its extenſive ſignification, comprizes conſiderations that have little to do with the ſubject of this treatiſe; therefore the elementary parts and principles only will be juſt touched on, as leading to what is the principal object of it, that

Digitized by Google

that of prompting thoſe who look at this treatiſe, to purſue the enquiries it recommends towards attaining knowledge, rather than expecting to find it in the work itſelf. Hence it is ſuppoſed as this little abſtract can quickly be peruſed, and eaſily retained, it may incite ſome, from the evident inſufficiency of it, to look further into the ſubject, whom otherwiſe the generally voluminous appearance of chemical treatiſes would have deterred.

From the above it may be ſuppoſed, that what is exhibited in the following ſketch, will be as free from conteſted points as poſſible, as well as being limited in the ſubjects of it. Therefore, notwithſtanding that, through the numerous diſcoveries made, and ſtill making, Air, Water, Earth, and Fire, are no longer deemed elements (Fire is deemed ideal) they will here be conſidered ſtill as ſuch, and the account as well as the reſt of the compendium, will be chiefly taken from Macquier; he ſtanding, as it were, in the mid-way between the old and the new theories (ſee Fourcroy's Chemiſtry in the Tranſlator's preface.

Here it would not be unpleaſant to dwell on the new diſcoveries and theories, as almoſt numberleſs tranſcriptions could be made, that,

Digitized by Google

at leaſt, might amuſe: however, thoſe who are inclined to look into the moſt modern authors, will find a liſt at the end of the work, each of which contains more or leſs of what would not only entertain as theories, but as otherwiſe are practically proper for every Callico-Printer to conſult. (9) See maddering and the laſt note to it. But reſpecting Dictionaries and other ſimilar compilations, a few excepted, nothing is more fallacious (ſee note 40 to this ſection) from their nature containing little original matter, and few of the new diſcoveries. For ſo many have been the opinions and facts promulgated within the laſt 10 or 12 years, that authors however reſpectable before that period,

(9) Among them will be found the means of rendering impure waters otherwiſe.—Detecting ſophiſticated allum, tartar, and other ſalts, with the diſcovery of new ones.—Various preparations of colours.—Experiments on Pruſſian blue, Indigo, &c.—a new green colour procured from phlogiſticated copper and arſnetical acid, &c. In the Mancheſter Philoſophical Memoirs, are enquiries in view of procuring new dyeing materials by Dr. Delaval,—on the uſe of acids in bleaching by Dr. Eaton.—The ſtate of the imitative arts among the Ancients compared with their preſent ſtate, by Mr. Thomas Kerſhaw, &c. &c.

Digitized by Google

riod, are in many points superseded; and Dr. Priestly himself declares, that theory itself is now unhinged, and Philosophers have to unstudy what they have been long labouring to acquire. Not but that the more this great arcana is pervaded, the more we discover of that wonderful connection of the whole; that rotation of effects, where nothing is displaced but its room is supplied; and that what is called destruction is only a preparative to new combinations and forms. *

The following are some of the modern innovations and facts, represented as briefly as possible, though far from being generally received. ----Phlogiston, instead of residing in inflammable bodies is resident in the Air, and is an element of Water.---Air contains phlogiston and water.---Inflammable air resolvable into water not smoak.---Common air contains out of 100 parts, 27 pure, 73 phlogestic.----- Water transmutable into earth.--- Water contains phlogiston and acid.---Ignition a substance put into a condition to imbibe phlogiston from the air; bodies therefore by being burnt acquire weight.---Vegetables exist by imbibing phlogiston.---Certain

* See this admirably exemplified in Fourcoy, vol. 4, on the subject of putrefaction.

Digitized by Google

tain green ſedgy matters purify water and keep it ſo.---In ſolutions of metals, the diluent or water is the ſolvent, and the metal decompoſes the acid. Several of the affinities are reverſed.(10) and Phlogiſton generally put at the top of each column.

In fine, the elements are now almoſt as much a ſubject of decompoſition as any other ſubſtances.

And here, to deviate from, or, perhaps, rather to enforce the ſubject juſt dwelt on, as it is offering a great counterpart of diſcovery, and by the contraſt, rendering what has been obſerved the more ſtriking; may it be exhibited as a reſpectful, and from the ſublimity of the circumſtance introduced, an aweful teſtimony that the preſent glorious epoch of knowledge tranſcends all previous human efforts; as taking all nature, as it were, into its graſp, and collapſing the extremes of creation? For, while philoſophy on one

(10) Not being generally known, and to ſhew that ſcientific diſcoveries, though not directly uſeful, may lead to what is ſo, it is ſaid here, that the reflections on the filling of Balloons, gave riſe to certain experiments on air.—It may be added for the above reaſon, that the effects of light on vegetable and other colouring ſubſtances is ſuch, as to give the Eaſtern countries their ſuperiority in that reſpect, as well as their original claim.

Digitized by Google

one hand, burſting through the elementary barriers of nature, purſues her to her inmoſt receſſes and analyzes thoſe objects, whoſe minuteneſs confound the imagination, and which are only perceptible by their effects; on the other hand, it not only adds new orbs to our ſolar ſyſtem, but darts into the immeaſurable expanſe and ſcrutinizes objects that as equally confound by their magnitude, and the ſpaces they poſſeſs; in ſhort, it can be ſaid, it explores immenſity itſelf, gages the very Empyreum, and exhibits its conſtruction!!!!!--But of this ſtupendous effort, the writer dare not venture to ſay more, as the ſcientific analyzers of literature themſelves, while they ſubſcribe to the ſucceſs of it, follow the explorer with timidity, and inveſtigate his purſuits with aſtoniſhment! * * * * * * * * *

This erratic deſcant is therefore cloſed with informing the reader, the whole is to be found in the memoirs of the Royal Society, 1785, as delivered

---

* * * In order to give perſons of confined information ſome idea of thoſe regions, the object of the above great Aſtronomer's reſearches, it may be ſaid the orbit of the Herſchel (originally named the Georgium Sidus) or the revolution it deſcribes round the ſun, is between 10 and 12,000 millions of miles; or above 3000 millions in diameter. Now here let the reader ſtop

Digitized by Google

delivered in by Dr. Herſchell; and the writer proceeds to the Compendium, beginning with the elements according to the poſitions juſt ſuggeſted; and firſt, of

A I R,

Air it need hardly be ſaid, is that fluid which ſurrounds our globe, and pervades all bodies not filled with a heavier ſubſtance than itſelf. Its chief and diſtinguiſhing quality, and from which reſults the general effects of it, is its elaſticity or ſpring, or its property of expanſion and rarefaction, according to the preſence of fire and heat. Its weight is about 800 times lighter than water; or a quantity of water 1 cubic inch in bulk

---

ſtop and contemplate the magnitude of this ſpace, as occupied by the ſun and the reſt of the planets; or ſuppoſe it is ſaid a ſphere or globular object filling this ſpace.— Now let him compare this vaſt object or occupied ſpace, to the regions now exploring, containing millions of millions of ſuch occupied ſpaces, and it muſt appear as a ſpeck, a grain of duſt, or a point. But further, if he conſiders theſe regions as unlimited, then this vaſt object, or ſpace of above 10000 millions of miles in circumference, if compared to ſuch unlimited ſpace, muſt ſeem ſmaller than any particle of matter is (which tho' we know it exiſts, yet cannot perceive it by the moſt powerful microſcope) compared to this object of above 3000 millions diameter, or above 1000 millions in circumference!!!

Digitized by Google

will require 800 times that bulk of air to be of the ſame weight, taking the air in its common ſtate, the bulk as before ſaid, being continually ſuſceptible of change.

WATER.

THIS is a tranſparent and inſipid ſubſtance, and fluid or ſolid according as affected by heat or the privation of it; its natural ſtate is ſuppoſed to be ſolid, and rendered fluid only by heat; expoſed to actual fire, it acquires a certain heat (by boiling) beyond which the greateſt force of fire can never raiſe it; the effects of dilatation (as when a ſmall quantity is thrown upon metal in fuſion) are occaſioned by the air it is ſuppoſed to contain, and like air it enters into the compoſition of moſt bodies, except metals and minerals, as it is only ſuppoſed to be interſperſed between their parts, without entering into their compoſition.

EARTH.

THIS element is different from thoſe juſt mentioned, in being fixed; they being volatile, or eaſily ſeparated by the action of fire, from the bodies with which they may be united; hence earth abſolutely pure cannot be affected by any operation

operation, and reſiſts the utmoſt force of the ſtrongeſt fire, being the caput mortuum, or that ſubſtance left after a chymical proceſs, which to all perception cannot afterwards be changed. Earth may however be divided in reſpect to its qualities, into vitrifiable and unvitrifiable; one that will melt by fire and become glaſs, and the other that will remain unaltered, ſuch as ſands, which are likewiſe called abſorbents, from their quality of imbibing liquids.

FIRE.

This element is diviſible into that which is concluded to originate from the ſun, and that which is called phlogiſton, as being univerſally held a conſtituent part of any body: that coming from the ſun may be called a fluid ſubſtance uninterruptedly flowing from him, and diffuſing itſelf through the whole planetary ſyſtem, and every particle of matter in it, but not as a native principle; hence it may be ſuppoſed the air itſelf would become a ſolid maſs without this intervening and active principle; its rarefaction and condenſation, with the dilatation of water, and ſimilar effects produced in the earth originating from it; and in all our operations it is the moſt powerful agent, and when collected in the focus

of

Digitized by Google

of a large lens, is at the greateſt poſſible height producible by human art.

What is underſtood by phlogiſton ſeems to be different, being apparently fixed to all bodies, ſo as to make a part of them; but how ſo active, or, as it were, ſo reſtleſs a ſubſtance can be ſo fixed, is not yet determinable, as it differs from elementary or pure fire (juſt ſpoken of) in communicating neither light nor heat when joined to any other ſubſtance, and produces no change in its ſtate; ſo that a ſolid body becomes not fluid, nor a fluid ſolid, by its abſence. The ſign of any ſubſtance containing phlogiſton, is its being capable of taking fire; but, as in the caſe with metals which abound with it, and which are not inflammable, it is not thence inferred they have none. Thus a body may be ſaid to contain its phlogiſton, when after a flame ſubſides it ſparkles or waſtes, till reduced to a coal; and, adverting to the ſubject of colours, it is known, that the number which we perceive is owing to the varied combination of phlogiſton, with oils, earths, and ſalts.

The

Digitized by Google

The next general conſideration is, that of ſecondary principles,(11) which are conſtituted chiefly of ſaline and oily parts; and as all the experiments that have been made, prove there is ſuch a mutual agreement, connection, or dependance on one part with another, the knowledge of what ſubſtances thus agree or diſagree, under their various combinations, forms (as muſt be clear to every one, and which has been repeatedly enforced) the foundation of ſome certainty in making experiments for any purpoſe whatever; but before that can be known, in reſpect to particular ſubſtances, the nature of this univerſal affection ſhould be conceived, and likewiſe what are the affinities of the different claſſes of ſubſtances which comprehend the ſpecies belonging to them; therefore the following poſtulata or propoſitions received as fundamental truths, (ſimilar to axioms in mathematicks, or maxims in common life;) and the table or ſcheme of affinities which will afterwards follow, have been formed for that purpoſe.

I. Any

(11) So deemed as containing an analyzation of ſubſtances more ſimple than what they help to form, and are yet compoſed of primary principles.

Digitized by Google

I. Any ſubſtance having a conformity with another, the two will unite and form one compound.

2. All ſimple ſubſtances have affinity with each other, and will conſequently unite; ſuch as water with water, fire with fire, &c.

3. Subſtances when united together loſe ſome of their reſpective properties, and the compounds reſulting from their union partake of the properties of thoſe ſubſtances which ſerved as their principles.

4. The ſimpler ſubſtances are, their affinities are more perceptible; hence it is moſt difficult to analyſe bodies that are the leaſt compounded.

5. If to a compound, conſiſting of two ſubſtances, a third be added that has no affinity with one, but has a greater with the other, than the firſt 2 combined have with each other, a new decompounding, and a new union muſt enſue.(11)

---

(11) Thus if you pour vitriolic acid on common ſalt, the mineral alkali having a greater attraction for the vitriolic acid than for the marine;

leaves

6. A third ſubſtance offered to a body conſiſting of two, no decompoſition may follow; but the two uniting with the third, without quitting each other, may form a union of three principles; preſuming the third ſubſtance has an affinity, or nearly equally ſo with each of the other ſubſtances.(13)

7. Though a compound conſiſting of two ſubſtances, having a greater affinity with each other than with a body preſented to them, may not be decompoſed by it; yet that body, when combined with another, having an affinity with

---

leaves the latter and unites with the former. The vitriolic acid is alſo ſaid to have a ſtronger attraction for the mineral alkali than the marine acid has: hence the former acid is ſaid to expel the latter from its baſis; or it may be ſaid demonſtratively thus; If A being united with C, upon B's being afterwards applied to them, lets go C and joins B, A is ſaid to poſſeſs a greater attraction for B than C.

(13) Thus when pure calcareous earth (lime) is diſſolved in the nitrous acid (aqua fortis), a cauſtic volatile alkali will not diſunite them, becauſe the attraction of the alkali with the acid is not ſo ſtrong as that of the calcareous earth.

Digitized by Google

with it, compenſating for its want of it with the others, may ſeparate the two, by uniting with each of them; therefore in this caſe there is a double affinity, a double decompoſition, and a double combination. (14)

What next follows is a table of affinities, or elective attractions, of one ſubſtance to another, or a more ſpecific repreſentation of the ſubſtances juſt alluded to, in the relation they are obſerved to have with other as productive of thoſe appearances that enſue by their operation on or with each other; the ſubſtances in each column or diviſion are placed in the order they agree with that at the top: thus in the firſt diviſion, Vitriolic Acid ſtands at the top; accordingly the ſubſtance that has the neareſt affinity to it is Phlogiſton

(14) Thus, to pure calcareous earth diſſolved in nitrous acid, (as above) let ærial or vitriolic acid be added, and the effect is obtained; the ærial acid acting on the earth on one hand, while the alkali acting on the nitrous acid on the other, diminiſhes the coheſion of the earth with the nitrous acid to ſuch a degree, that the volatile alkali is now able to unite itſelf with the latter acid, and expel the earth.

Digitized by Google

Phlogiſton; Fixed Alkali has leſs than Phlogiſton; Calc. Earth leſs than Fixed Alkali, and ſo on. (15)

Vitriolic Acid.	*Nitrous Acid.*
Phlogiſton	Phlogiſton
Fixed Alkali	Fixed Alkali
Calcareous Earth	Calcareous Earth
Zinc	Zinc
Iron	Iron
Tin	Lead
Copper	Tin
Quickſilver	Copper
Silver	Quickſilver
Volatile Alkali	Silver
Magneſia	Volatile Alkali
Earth of Allum	

Marine

(14) It may be intimated, that all Chymiſts do not agree in the juſtneſs of theſe affinities in particular caſes, for in this inſtance (as well as in the inſtance of printing, and indeed in all human ſciences) circumſtantial differences will ever happen, ſince the perceptions of hardly two perſons are affected alike.

Digitized by Google

Marine Acid.
Fixed Alkali
Calcareous Earth
Zinc
Iron
Lead
Tin
Copper
Reg. of Antimony
Quickfilver
Spirits of Wine
Volatile Oils
Gold

Sulphur.
Fixed Alkali
Calcareous Earth
Iron
Neckel
Copper
Lead
Tin
Silver
Reg. of Ant.
Quickfilver
Arfenic

Liver of Sulphur is partially decompofed by
Quickfilver
Solution of Fix. Alk.
Lime Water
Vol. Alk.

Fixed Air.
Calc. Earth
Fix. Alk.
Magnefia
Vol. Alk.

Alkaline Salts.
Vitriolic Acid
Nitrous Acid
Marine Acid
Acetous Acid
Vol. Vitriolic Acid
Sedative Salt
Fixed Air
Sulphur
Expreffed Oils

Calca-

Digitized by Google

Calcareous Earth.
Vitriolic Acid
Nitrous Acid
Marine Acid
Acid of Tartar
Acetous Acid
Sulphureous Acid and ſedative ſalt
Sulphur

Metallic Subſtances, Lead, and Reg. of Ant. excepted.
Marine Acid
Vitriolic Acid
Nitrous Acid
Sulphur and
Acetous Acid

Lead.
Vit. Acid
Mar. Acid
Nit. Acid
Acet. Acid
Expreſſed Oils

Reg. of Ant.
Vit. Acid
Nit. Acid
Mar. Acid
Acet. Acid

Arſenic.
Zinc
Iron
Copper
Tin
Lead
Silver
Gold

Reg. of Antimony (with Metals.)
Iron
Copper
Tin
Lead
Silver
Gold

Quickſilver.
Gold
Lead and Tin
Copper
Zinc, Biſmuth, and Reg. of Ant.

Digitized by Google

Silver.	Spirits of Wine
Lead	Mild Alk. Salt and
Copper.	ſome Neutrals
Iron	
Water.	*Spirit of Wine.*
Fix. Alk.	Water
	Oils and Reſins

In conſequence of heat, ſedative ſalt decompoſe tartar and ſea-ſalt, phoſphorus acids decompoſe vitriolated tartar, nitre and ſea-ſalt.

Inſtances of double elective attractions.

As where the two compounds being mixed, thoſe oppoſite to each other, as they are here exhibited, unite and form double affinities.

Acids. - -	Vol. Alk.
Calcareous Earths, or Metallic Subſtances.	Fixed Air
Vitriolic or Marine Acid.	Mercury, Silver, or Lead.
Alk. or Earth.	Nit. or Mar. Acid
Lead. - - -	Vit. Acid
Nit. Mar. or acet. Acid	Alk. Earths or Metallic Subſtances

Digitized by Google

Silver - -	Fixed Air
Vit. Mar. or acet. Acid.	Fixed Alk.

Nit. Mar. or acet. Acids.	Vol. Alk. Magnesia, or Earth of Allum.
Calc. Earth. -	Vit. Acid

Instances in Distillations and Sublimations, and that require heat.

Vol. Alk. -	Fixed Air
Acids. - -	Calc. Earth

Vol. Alk. - -	Nit. Mar. or acet. Acid.
Vit. Acid. -	Fix. Alk.

Vol. Alk. -	Acet. Acid.
Nit. Mar. or Vit. Acid.	Fix. Alk. or absorbent Earths.

Reg. of Ant.	Mar. Acid.
Sulphur -	Quickfilver.

Instances in Mixtures by Fusion.

Tin - -	Iron
Silver -	Lead

Copper -	Sulphur
Gold - -	Lead

Digitized by Google

Metallic Subſtances Gold - -	Sulphur Reg. of Antimony

The affinities or attractions here diſplayed are either in the humid or dry way; the humid is, when one, at leaſt, of the ſubſtances is fluid in the heat of air, or a heat but little beyond; the other is, when to produce a fluidity, the application of burning fuel is neceſſary.

Example in an inſtance of ſingle attraction.

Apply to cinnabar and iron filings, a certain heat; the mercury of the cinnabar will riſe, and leave the brimſtone, its other element, combined with the iron, which it attracts in preference to the mercury.

Example in an inſtance of double attraction.

Unite mercury with common ſalt, by means of a like certain degree of heat, a new compounded combination will commence among the ſubſtances: by the marine acid of the common ſalt joining the quickſilver of the mercurial ſalt, forming a new ſalt called corroſive ſublimate, while the mineral alkali of the common ſalt unites with the vitriolic acid of the firſt mercurial ſalt, and forms what is called Glauber's ſalt.

Digitized by Google

Of Salts in General,

or Saline Subſtances,

comprifing Acids, Alkalies and Neutrals.

SALINE ſubſtances are combinations of earths and water, or they are combinations capable of uniting with either of them, or with both together, for all ſalts are reſolvable into earth and water, and the more or leſs they are united to their earths, they are fixed or volatile, which circumſtance makes the difference between acids and alkalies. Acids are the ſimpleſt of ſalts, uniting readily with water, are ſharp to the taſte, and have the diſtinguiſhing property of turning vegetable blues and violets red.

Alkalies have a greater proportion of earth than acids have, and have leſs affinity with water, but unite violently with acids, producing an effervescence and hiſſing; they are fiery and acrid to the taſte, and turn vegetable blues and violets green.

Neutral

Digitized by Google

Neutral Salts are formed from the union of an acid and alkali, by which union they rob each other of its properties, which are then ſo blended that neither predominates, and which intimate union is called the point of ſaturation: they produce no change in the blue colours of vegetables, and are neither acrid or ſour, but ſalt, ſuch as is the taſte of kitchen ſalt, and are generally known by the plain general term of ſalts. Imperfect neutrals are thoſe in which either the acid or alkali predominate.

Of the univerſal or vitriolic Nitrous and Marine Acids.

The univerſal acid, according to its name, is found diffuſed in the waters, in the atmoſphere, and in the bowels of the earth, but ſeldom pure or unmixed with other ſubſtances; what the greateſt quantity is collected from is vitriol, hence it is called the vitriolic acid; and when it contains only juſt phlegm enough to give it a fluid form, it is called oil of vitriol; if it contain much water, it is called ſpirit of vitriol; when it has not enough to render it fluid, it is called the icy oil of vitriol.

This acid combined with a certain abſorbent earth, with the nature of which we are unacquainted

Digitized by Google

quainted, forms a neutral ſalt called allum; differing in quality according to the earths with which the vitriol is combined: An alkali being preſented to allum, the acid will quit the earth and join the alkali, and from the junction of the vitriolic acid, with a fixt alkali, a neutral ſalt is formed, called either *arcanum duplicatum*, or *vitriolated tartar*, one of the fixed alkalies moſt in uſe, being ſalt of tartar.—See Maddering, and note 27.

The conjunction of this acid with phlogiſton forms ſulphur.

Nitrous Acid.

This is no other than the vitriolic acid combined with phlogiſton, by the agency of putrefaction, at leaſt ſuch is the received opinion, the nitrous acid being found only in earths and ſtones, impregnated with matters ſubject to putrefaction; when combined with chalk, ſtone, marble, &c. it forms a ſalt, that does not chryſtalize, which runs in the air, per deliquium, and is decompoſed by fixed alkalies, with which the acid unites and quits the earths, and from this union reſults *ſalt-petre*.

The moſt remarkable and diſtinguiſhing property of nitre is its diſpoſition to unite with phlogiſton,

Digitized by Google

phlogiſton, in its pureſt ſtate, ſuch as char-coal, ſulphur and metallic ſubſtances; thence burſting into a flame with great noiſe, called its detonation or deflagration, in which caſe the acid is diſſipated, and the alkali which is left is called fixed alkali.

A nitre is to be procured by dropping into ſpring water, a ſolution of fixed alkaline ſalt, filtrating the liquid and evaporating it to a certain degree.

Marine Acid or Sea-Salt.

In reſpect to the conſtituent parts of this acid, wherein it differs from the vitriolic and nitrous, it is not certainly known, no more than it is wherein they differ from each other; but when combined with abſorbent earth (lime or chalk) it forms a neutral ſalt, that does not chriſtalize, and when dried, attracts the moiſture of the air: This acid, like the others, has leſs affinity with earths than with fixed alkalies, but as well as the others have, it has a greater with phlogiſton; and when combined with fixed alkali it forms a neutral ſalt which ſhoots into cubical chryſtals, and is inclined to run in the air.

The acid of this ſalt when freed from its baſis, is called *ſpirit of ſalt*, and when containing little phlogiſton,

Digitized by Google

phlogiſton, it is called the ſmoaking ſpirit of ſalt, from its then continually emitting vapours.

Combined with phlogiſton, a kind of ſulphur is the reſult, that takes fire on being expoſed to the air, called *phoſphorus of urine*, being generally prepared from urine.

India ſupplies us with another acid called borax, which flows and takes the form of glaſs, and poſſeſſes ſome of the properties of fixed alkali.

L I M E.

Any ſubſtance that has been roaſted in a ſtrong fire without melting, is called a calx; ſtones, (which are ſubſtances compoſed of different earths) reduced to this ſtate is called lime; this applied to fixed alkalies make them more active and renders them corroſive or cauſtic, and from which the common cauſtic ſtone is prepared: Lime unites with all acids, and chryſtalizes with the marme, but not with the nitrous.

Quick lime attracts the air like concentrated acid, and dry fixed alkali, but not ſo as to render it fluid; it only takes the form of a powder, and is then called ſlacked lime; when once ſlacked, though it ſeem ever ſo dry afterwards, it requires a violent calcination to ſeparate the water from it,

Digitized by Google

it, which it had imbibed. Sand is mixed with it in making mortar, or it would otherwiſe contract and conſequently crack and break.

In Chemiſtry it is deemed holding a middle rank between abſorbent earths and fixed alkalies.

Metallic Subſtances.

Theſe conſiſt chiefly of a vitrifiable earth combined with phlogiſton, and are therein fuſible; they are likewiſe ponderous, opaque, and ſparkling: a third principle is contended for by ſome chymiſts, called mercurial earth, but it is doubted to exiſt by others.

Metallic ſubſtances readily unite with moſt acids, and in that caſe an ebullition with vapours ariſe; by degrees the metallic particles become inviſible in their ſolvents, and the metal is then ſaid to be diſſolved; but, as with alkalies, an acid can only take up ſuch a portion as is ſufficient to deſtroy ſome of its properties, and to render others weaker. The affinity that metallic ſubſtances have with acids, is leſs than

Digitized by Google

what they have with abſorbent earths and fixed alkalies, ſo that the acid which will unite with theſe ſubſtances, will decompound the metalline ſalts, and precipitate the metal, which are then called precipitates and mageſteries.

Metallic ſubſtances are 6 in number, 2 perfect viz. Gold (Sol) Silver (Luna) and 4 imperfect, viz. Copper (Venus) Iron (Mars) Tin (Jupiter) and Lead (Saturn;) Quickſilver (Mercury) is by ſome, called a ſeventh metal.

GOLD.

As metals are the heavieſt ſubſtances known, gold is the heavieſt of all, and when pure, is unalterable in fire as far as any experiment hath hitherto proved, neither can it be diſſolved by any pure acid; but only by the acid of nitre mixed with that of ſea-ſalt, called aqua regia. Gold is likewiſe the moſt ductile and moſt malleable of all metals.

A remarkable circumſtance, and as yet not clearly accounted for, is the fulminating quality of the precipitate by an alkali or abſorbent earth, gently dried and expoſed to a certain degree of heat;

Digitized by Google

heat; this is called *aurum fulminans*, but the acid of vitriol poured on it, will deprive it of that quality, as will likewiſe be the caſe, if it be cleared of its ſaline particles, which, waſhing it in water will accompliſh.

Gold is not affected by a pure ſulphur when combined with an alkali.

SILVER.

This metal is the next perfect to gold, being lighter and leſs ductile, but like gold it reſiſts the greateſt force of fire, in which is their ſuperiority over all metals: The true ſolvent of ſilver is the nitrous acid, the chryſtals formed thereby are particularly cauſtic; it is likewiſe ſoluble by the vitriolic acid, if it be concentrated, but ſpirit of ſalt, and aqua regia, as well as the other acids, are not capable of affecting it: yet in reality it has a greater affinity with both, than with the vitriolic; for if the vitriolic or marine acid be added to a ſolution of ſilver in the nitrous, the ſilver will directly join it, and the precipitate procured by the marine acid, is called *Luna Cornea*: Fixed alkalies and abſorbent earths will ſeparate the ſilver from the nitrous acid, though the nitrous acid cannot act on it when mixed with an equal quantity of gold, but when

when in a triple proportion it can with eaſe: If aqua regia be employed when they are in equal quantities the ſeparation will be effected, by the gold being diſſolved and the ſilver left free; but the operation by aqua fortis is to be preferred, it having no effect on gold, and a little of the ſilver is always taken up by the aqua regia: Silver united with ſulphur ſoon flows, and forms a mallable maſs, the colour of lead:---Solution of ſilver in the nitrous acid ſtains hair, bones, wood, &c. from a brown to a black, and gives a ſtain to marble and other ſtones.

COPPER.

This is the firſt of the imperfect metals, it reſiſts fire a long time, unites readily with gold and ſilver, and is ſoluble in all the acids, neutral ſalts, and even in water; to ſome imparting a green colour, and to others a blue: diſſolved in vitriolic acid it forms blue cryſtals, called blue vitriol or vitriol of copper: diſſolved in aqua regia, the marine or nitrous acid, it forms a ſalt which does not cryſtalize, and runs in the air: The precipitates by alkalies or earths retain

Digitized by Google

tain nearly the colour the ſolution gives: mingled with nitre and expoſed to the fire, as well as the other imperfect and ſemi-metals, it is ſooner decompoſed and calcined than if preſented alone: mixed with ſulphur and made red hot, it ſoon melts and forms a new compound more fuſible than alone.

IRON.

This metal ſtands alone for its property of being attracted by the magnet, but loſes it if reduced to a calx, or converted to an earth: by repeated melting it is rendered purer than by having only undergone fuſion, but is not malleable till after being heated red and hammered in all directions: before this proceſs it is called *pig-iron* but *bar-iron* afterwards; and is then harder to fuſe: Fuſing it with articles that contain phlogiſton, or encloſing it in phlogiſton matters, and expoſing it thus in juſt a red hot ſtate for a certain time, it is converted into ſteel or hardened: Suddenly quenching it when red-hot in a cold liquor, the hardneſs is augmented, and that in proportion to the heat of the metal and coldneſs of

Digitized by Google

of the water; it may be brought back by cementing it with calcined bones, chalk, &c. rendering it red hot and leaving it to cool gradually, or if heated alone, and left thus to cool, the temper given to ſteel is deſtroyed. Iron being calcined turns to a yellowiſh cruſt, by loſing its phlogiſton, and is then called *crocus martis* or *ſaffron of mars*. All acids, as well as certain ſalts, alkalies, and water itſelf, operate on it, but the vitriolic acid diſſolves it the readieſt, rendering the ſolution of a beautiful green; the cryſtals produced by which are called *green vitriol*, *vitriol of mars*, or *copperas*: Ochre is the ſediment produced from green vitriol diſſolved in water: Spirit of nitre diſſolves iron with eaſe, producing a brownish yellow, but the calx formed by this ſolution cannot be a ſecond time diſſolved, for having loſt its phlogiſton, the nitre will not act on it, neither does this nitrous ſolution cryſtallize: The ſolution by ſpirit of ſalt is green, the vapours of which are inflammable, as well as thoſe cauſed by the vitriolic acid: the ſolution in aqua regia is yellow.

Iron having a greater affinity with ſpirits of nitre and ſpirits of vitriol, than either ſilver or copper has, if offered to a ſolution of either, the ſilver

Digitized by Google

ſilver or copper will precipitate, by the acid quitting them and joining the iron: Iron filings expoſed to the dew, turn entirely to a ruſt, called *crocus martis aperiens:* united with ſulphur, it acquires a great degree of fuſibility: Iron makes a part of almoſt all ſubſtances (which the magnet will diſcover) it is found in the caput mortuum of all vegetable ſubſtances, even in honey, the earth being ſuppoſed to be impregnated with a ferruginous or vitriolic matter, and from thence received into vegetables, and from vegetables it paſſes into animals: It is the only metal that ſparkles in the focus of a burning glaſs.

T I N.

This is the lighteſt of all metals, has but little ductility and runs long before it is red hot: The calx when vitrified, being mixed with ſome other ſubſtance is called enamel, which is differently coloured by means of other metalline calces: Tin unites with all metals, but deſtroys their ductility and malleableneſs, lead excepted: Thoſe the moſt ductile it effects the ſooneſt, and in the greateſt degree: Bronze and bell-metal are made from a compoſition of this metal with zinc: mixed with lead it produces pewter, and

and is uſed with quick-ſilver in making looking-glaſſes.

The vitriolic, nitrous and marine acids have an affinity with it, but cannot eaſily diſſolve it, as they only reduce it to a kind of calx: The proper ſolvent (as mentioned more fully further on) is aqua regia, and has even a greater affinity with it than with gold. Gold precipitated by this method is a moſt beautiful colour, and uſed as a red for porcelain and enamelling: It has the property of giving red colours in general, hence tin veſſels are uſed in making fine ſyrup of violet. It is not affected by water as iron and copper are, but it loſes its poliſh on expoſure to the air: It readily unites with ſulphur.

LEAD.

This is the heavieſt of all metals, gold and ſilver excepted, is ſofter than any, and except tin, melts the eaſieſt: Vitriolic acid affects it nearly as it does ſilver; the nitrous acid diſſolves it with much eaſe, and in great quantities; the cryſtals are of a ſweet taſte, of a yellowiſh colour, and are not eaſily diſſolved in water: Spirit of ſalt, or the ſalt in ſubſtance, added to the ſolution in nitrous acid, produces a white precipitate called *plumbum cornea*, which diſſolves

Digitized by Google

ſolves eaſily in water: Being melted, it hardens into a kind of horny ſubſtance, like the luna cornea (whence the name:) Lead boiled a long time in a lixivium of fixed alkali will partially diſſolve: It is rendered very refractory by ſulphur.

QUICKSILVER.

This ſubſtance is ſoluble in acids, but to each acid, particular circumſtances are annexed; thus the vitriolic acid concentrated, and made boiling hot, reduces it apparently to a white powder; which on the affuſion of water turns yellow and is called *turbith mineral*.

Quickſilver is eaſily diſſolved by the nitrous acid; the ſolution is clear, and as it cools ſhoots into cryſtals: If evaporated to dryneſs, it produces red precipitate: With ſolution of copper the precipitate is green.

Combined with marine acid, it forms a metalline ſalt, the cryſtals of which, called *corroſive ſublimate*, are pointed like daggers, and is the moſt violent corroſive hitherto diſcovered: From this ſublimate is produced yellow precipitate: Quickſilver unites with ſulphur very eaſily, and produces by the mere mixture, *ethiops mineral*:

Digitized by Google

neral: By rendering the union more perfect by a ſtrong heat, a ponderous ſubſtance is procured called *cinnabar*, which finely ground produces *vermillion*.

Of Semi - Metals,

Namely, Regulus of Antimony, Biſmuth, Zinc, Regulus of Arſenic.

Reg. of antimony has the brilliancy, opacity, and gravity of a metal, but like all ſemi-metals, crumbles under the hammer: It ſoon diſſipates into ſmoak and white vapours by a violent heat; flowers of antimony are thoſe vapours, collected by any cold body, which ſtops them in their aſcenſion.

Its affinity is greateſt with iron, copper next, and then with tin, lead, and ſilver.

Its proper ſolvent is aqua regia, marine acid next, if highly concentrated and applied by diſtillation; The vitriolic acid likewiſe diſſolves it, but with the nitrous it is little more than calcined.

Liver of antimony is procured by mixing nitre with it, three parts nitre and one of antimony produces

Digitized by Google

produces a calx called diaphoretic antimony, or diaphoretic mineral. Antimony is uſed to ſeparate gold from other metals, and the precipitate from its union with an alkali, is called the *golden ſulphur of antimony.*

BISMUTH.

This ſubſtance is rather duſkier than the former, and like other ſemi-metals is volatized with a violent heat: It mixes with and quickens the fuſion of all metals, whitens them, and deſtroys their malleability.

Biſmith is not ſoluble in the vitriolic acid, but in the nitrous it diſſolves with much fume: Marine and aqua regia diſſolve it, but with leſs rapidity; alkalies, and even water only, precipitate it, forming the *magiſtery of biſmuth*. In its union with ſulphur it forms a compound, appearing like needles lying ſideways by each other.

ZINC.

Zinc differs little in appearance from biſmuth, except having a bluiſh caſt, though eſſentially it differs very much: It melts the moment it grows red, ſoon turning to a calx; and in an augmented heat burns like an oily matter, evincing the great quantity of phlogiſton which it contains.

Digitized by Google

It unites with all metallic ſubſtances except Biſmuth; It is ſoluble in all the acids, particularly in the nitrous; ſulphur has little or no power over it.

It has a greater affinity with the vitriolic acid than iron or copper has, forming a precipitate called white vitriol, or vitriol of zinc: United with copper it makes braſs, pinchbeck, &c.

Regulus of Arsenic.

This readily unites with all metals, and is the moſt volatile of the ſemi-metals, flying off even by a moderate heat: the calx is plain arſenic; the properties of which are peculiar to itſelf, having great volatility, having a ſaline character, being ſoluble in water, and exceſſively corroſive, a quality none of the other ſemi-metals poſſeſs: It cannot be decompounded by any acid, except when joined to metallic ſubſtances: Combined with the alkali of nitre or ſea-ſalt, if they be in a fluid ſtate, it forms a ſingular ſaline compound, called *liver of arſenic*: Arſenic unites readily with ſulphur, and produces *yellow orpiment*.

Inflammable

Digitized by Google

Inflammable Subſtances.

Theſe are Sulphurs, Oils, Reſins, Bitumens, Spirits of Wine, Charcoal.

ALL bodies, probably contain more or leſs phlogiſton, but theſe are deemed inflammable in which it abounds, but with which, at the ſame time, it is not ſo intimately blended, but that it may be driven out from them, under certain circumſtances, by the intervention or ruſhing in of the air.

Sulphur (as ſaid before) is the vitriolic acid combined with much phlogiſton. Oils are mineral, vegetable, or animal, and are, in general, unctuous bodies, that burn and conſume with flame and ſmoke, containing phlogiſton; which by means of an acid is united with phlegm or water, together with a certain portion of earth: Nitrous and vitriolic acid, act on oils according to the portion of phlegm which they contain.

Charcoal, or any charred matter, is what is left from the burning of any vegetable or animal matter, that has an oil united to much earth; this ſubſtance is unalterable by any other body than fire; hence acids ever ſo highly concentrated have no effect on it.

Reſins will be ſpoken of in the next ſection.

Digitized by Google

Of Vegetable Subſtances.

From the analyſis of vegetable ſubſtances, it is clear they contain phlegm, an acid, a light oil, much air, and a thick oil, but none of theſe principles can be obtained pure by mere diſtillation, as their ſeparation is only began by this proceſs, therefore others are adopted to compleat the analyſis.

Some vegetables, by analization, prove that they contain the ſame principles as animal ſubſtances poſſeſs, and inſtead of yielding an acid, a volatile alkaline only is to be obtained; probably becauſe the acid of the vegetable ſuffers ſuch changes when it enters into the compoſition of animals, that is, it combines with ſome of their earth and oil, in ſuch a manner as to be changed into a volatile alkali.

In burning any vegetable ſubſtance in the open air, the analyſis is more rapid and compleat, burning till all its oil is conſumed, and a coal remains, and this continues waſting till all its phlogiſton is diſſipated, what then is left is its earth

earth and fixed alkali, commonly called the aſhes. Water, the natural ſolvent of ſalts, takes all of them up that are contained in the aſhes, ſo that by lixiviating them, nothing at laſt is left but the pure earth.

All balſams, as well as turpentine, are oily aromatic matters, procured by different methods from thoſe trees which produce them; theſe abound with eſſential oils ſeparated from the vegetable in which they exiſt.

Reſins are diſtinguiſhed from natural balſams by containing leſs oil, and more acid, ſo that they are leſs diſpoſed to be fluid, and are ſoluble only in ſpirits of wine; they however differ from each other according to the quantity or quality of acid to which they owe their conſiſtence: The ſaline character of Benjamin is evident from its being ſoluble in water, but then it muſt be boiling; the ſalt produced from it will chryſtallize and may be diſſolved in ſpirits of wine.

Gums differ from reſins in being ſoluble in water, but (as before ſaid) reſins are not; reſin being an eſſential oil grown thick, and have an aromatic odour, which gums have not: the ſmall portion of oil which gums contain, being ſo thoroughly mixed with their acid, does not hinder their

Digitized by Google

their diſſolving in water, and therefore they reſemble honey, and other vegetable juices, in being originally fluid, and only grown hard by the evaporation of their moiſture; the ſame as reſins become ſolid by loſing, in the ſame manner, their fluid parts: but in gum-reſins, the two qualities are ſo blended, that each will diſſolve in its proper menſtruum, leaving the other entire.

Sugar, manna, and all the ſaccharine juices of fruits and plants, are of the nature of honey, containing a phlegm, an acid, an oil, and a coal: but differ from reſins in not being inflammable, or will not flame till nearly reduced to a coal: All theſe ſubſtances are deemed natural ſoaps, conſiſting of an oil rendered miſſible with water by means of a ſaline ſubſtance, but differ from common or artificial ſoaps in having their ſaline part an acid, while that of the others is an alkali: Why they are ſweet, thongh containing much acid, is from the acid being intimately ſheathed or ſmoothed by the oil: Of ſoap it may further be ſaid, that alkalies or acids combined, in a certain manner with oil, produce them; for oily and ſaline ſubſtances combined, follow the ſame rules as other combinations, by reciprocally combining the properties belonging to each other,

and

and (according to the rules of affinities) ſoaps are decompoſed by alkalies, and alkalies by acids.

The moſt expeditious mode of making a ſoap (being Dr. Lewis's improvement on Mr. Beaume's) is, by heating the alkali red hot, then throwing it into oil of turpentine, and ſtirring them well together; in time, a ſalt cryſtallizes both within it, and over its ſurface, but its nature is unknown.

Of Animal Subſtances.

Theſe produce jellies, which when inſpiſſated and become ſolid in the cold, form glue, and by the evaporation being carried further, it becomes horn.

This jelly, or gelatinous ſubſtance, is the only true animal one; as all human parts, bones and all, are to be reduced to it; the other properties it has in common with vegetables gums or mucilages, except that the animal one makes a ſtronger cement: Acid, and alkalies particularly, eaſily diſſolve animal jellies; but the nature of theſe combinations is not known.

Digitized by Google

Of Earths.

Earths are either ponderous; calcareous *(Lime)* magnesia; argillaceous *(Clay;)* or silicious *(Cryſtal)* They are characterized by remaining unaltered in a red heat, and of thoſe five above mentioned no one has been yet able to decompoſe or tranſ-unite one into another.

Ponderous earth forms with vitrolic acid, ponderous ſpar, and is not ſoluble in one thouſand times its own weight of boiling water.

Calcareous earth ſaturated with vitriolic acid forms *gypſum*, known by the property it has of forming, after a ſlight burning, a hard maſs with water.

Magneſia ſaturated with vitriolic acid, forms what is called *Epſom ſalt.*

Pure argillaceous earth with vitriolic acid forms an allum.

The above four kinds may be called abſorbent earths, but the laſt has the leaſt claim.

Silicious earth is not affected by vitriolic acid, it is however diſſolved by that of ſpar, the diamond excepted, neither is the diamond changed by the greateſt heat, if not expoſed to the air.

Digitized by Google

Of Fermentation and Putrefaction.

By fermentation is underſtood (as partly mentioned before, ſee notes 12 and 33 in copper work) be a ſpontaneous motion in a body, by which a new diſpoſition and combination of its parts is produced: To procure it there muſt be a certain proportion of watery, ſaline, oily and earthy parts, the ſubject muſt be in a temperate heat, and have the aſſiſtance of the air: And as all animal and vegetable ſubſtances contain the principles juſt mentioned, they are of courſe all ſubject to fermentation: Minerals are excluded, not being as far as can be diſcovered, ſubject to this operation.

There are three ſpecies of fermentation, the vinous or ſpirituous, or what produces wine, and ſpirituous liquors; the acetous or what produces acid liquors, ſuch as vinegar; and the putrid, or what generates an alkaline volatile ſalt.

The ſubjects of the ſpirituous are moſt fruits, ſeeds and grains, diluted with a certain quantity of

Digitized by Google

of water; by certain proceſſes, air bubbles ariſe with vapours, ſo extremely active and pernicious that without caution the effects may be fatal, this operation, if not ſtopped, will proceed to the laſt ſtage, namely putrefaction; the imparities then precipitate and leave the liquor clear and tranſparent.

By diſtillation an inflammable liquor light, pleaſant and penetrating is drawn from wine that has fermented, which by repeated proceſſes become more and more rectified, and is called ſpirit of wine; and if conſiderably purified, an ardent ſpirit; which burns without ſmoak or leaving any coal: united with acids they loſe their pungency, and are ſaid to be dulcified. This ardent ſpirit may, however, be rectified, or entirely dephlegmated till it produces æther, which is ſo volatile that it flies off in the air, fires at the approach of a flame, and leaves not the leaſt appearance of aſhes; diſſolving oily matters with the greateſt eaſe, and has a greater affinity with gold than even aqua regia has.

Beſides this ardent ſpirit, a deal of water, oil, earth, and a kind of acid is afforded by wine, which when the ſpirituous part is extracted ſuffers no farther change: but if they all remain, the

Digitized by Google

the fermentation, after ſome time, will begin again, the liquid turns ſour, and then acquires the name of *vinegar*; but this produces no noxious vapours, nor depoſits any tartar: Wine however is not alone the ſubject of acetous fermentation, for ſeveral vegetable, and even animal ſubſtances, not ſubject to the ſpirituous, turn ſour before they putrefy: this acid has the ſame properties as the mineral, and has effect on the ſame ſubſtances that the mineral acid has, but in a weaker degree: It has a greater affinity with alkali than ſulphur has, and a neutral oily ſalt is formed from its ſaturation with a fixed alkali. By its ſolution in ſpirits of wine, is produced *regenerated tartar:* Several ſaline compounds are produced by its union with calcined pearls, corals, ſhells, &c. it perfectly diſſolves lead, converting it into a neutral metallic ſalt, from which is produced *Sal Saturni*, or *Sugar of Lead*, becauſe of its ſweet taſte; The vapour of vinegar has that effect on lead as to produce *ceruſs*: Vinegar likewiſe corrodes copper, and converts it into a green ruſt, called *verdigreas*, though not commonly employed for that purpoſe, wine, or the rape of wine, being more uſed.

Tartar

Tartar is a ſaline compound, containing earth, oil, and a ſuper proportion of acid; it is formed in wine-caſks, adhering to the inner ſides, particularly in thoſe that contain acid wines; when puriſied, there appears on the ſurface a cryſtalline pellicle, or ſort of ſkin, which taken off is called *cream of tartar*, the cryſtallizations of the ſame liquor are called *cryſtals of tartar*, and only differ in form from the cream; and though they have the appearance of a neutral ſalt, yet they have all the properties of a true acid, but weaker than any other: by calcination a fixed alkali is procured from tartar, ſtronger and more ſaline than what is formed from moſt other matters.

The laſt ſtage of fermentation (though by ſome deemed a diſtinct operation(16) is putrefaction, to which ſtate when a body is approaching, it is evident by a ſuperior degree of heat, the effect of which, as in the preceding ſpirituous and acetous operations, tends to change the diſpoſition of the particles of the body in which it is excited; though how it is brought about, is not yet diſcovered; but after it has undergone the change, the body ſeems then to contain a principle

16 Boerhaave particularly, Stahl however denies it.

Digitized by Google

principle that it did not before, a ſaline matter exceedingly volatile, and is, when ſeparated from the other principles of the body which produced it, either a volatile urinous ſpirit in a liquid form, or a volatile urinous ſalt in a maſs. In this ſtate, whatever difference there might have been, before in vegetable ſubſtances, none is now viſible.

End of the Compendium of Chemiſtry.

Note, It is in different places obſerved, that it would be abſurd to offer poſitive or ſpecific rules for the performance of the operations juſt treated of, and for which, various reaſons are given (ſee introduction to copper-work note 16, and other places) therefore according to the ſame principles the ſubject of this ſection will be treated in a ſimilar manner; and as the preceding part of this ſection was exhibited under an idea that a knowledge of chemiſtry ſhould be the foundation of the practice in its fulleſt extent, ſo the following compendium or general view of operative circumſtances is exhibited as the foundation of thoſe proceſſes which ariſe from them, ſpreading every way into an endleſs variety, and which can only be conceived by long experience in the practice of them.

Red,

Digitized by Google

1. Red, yellow, and blue, are the primitive or fundamental colours, and from which, under various combinations, all colours or ſhades that exiſt in nature that are to be procured. Black is excluded on a philoſophical conſideration.

2. Moſt colouring materials require ſome operation to ſeparate or diſſolve their tinging qualities; ſome will give no permanent colour, till the ſubject intended to be coloured is printed with ſome aſtringent, ſuch as allum, which will ſecure the particles of the colouring ſuch, ſuch as red from madder, yellow from woald, &c. or by the addition of others the colour is varied according to the quality of the additional ſalts, as tartar, &c. vary the ſhade or colour that the allum only would procure.

3. In general the effect of colouring materials produced by certain ſolutions, is different from their natural outward appearance.

4. No ſubſtance is yet diſcovered that of itſelf will make permanent green(17),conſequently all durable

17 Thouſands of unſucceſsful attempts have been made to attain this point, but till the tinging blue and yellow ſubſtance can be ſo equallized in quality, or harmonized in union. it is granted it muſt remain undiſcovered.— See more on this matter further on.

Digitized by Google

durable ones are compounded; neither is there any black material in uſe, that, of itſelf, gives a permanent black.(18)

5. In ſome caſes, the colouring liquid muſt be boiling, in others luke-warm, and in others cold: ſome drugs require a certain age, and others not: the materials which form different veſſels, in which colours are made or kept, ſhould be conſidered, as well as their capacities, or the uſes to which they may have been before applied.

6. In the operation of faſt work, ſhould be conſidered 1. the opening of the body to be coloured: 2. the colouring matter itſelf, and 3. the fixing of it, to which may be added, the clearing or brightning of it.(19) See the end of copper-work.

Note, Cleanlineſs at all times, and in every ſtage, cannot be too much enforced; thus if the colour maker be ever ſo careful, his endeavours may be

(18) It is remarkable in many caſes, that the deepneſs of the black depends on the height of the white of the ſubſtance from which it is produced, as ivory when burnt; and ſome materials, as madder, woad, and indigo, will turn black in their effuſions, by repetitions of their tinctures,—ſee note 28 farther on.

(19) This brightening is too much practiſed, not as here meant, but merely to fluſh up the colours, —See maddering, and note 39 of this ſection.

Digitized by Google

rendered abortive by the careleſs uſe of ſieves, pans, &c. A Colour-houſe ſhould never be open to every one; and a place ſhould be ſet apart for delivering out colour: for wantonneſs and malevolence, it is well known, has in this caſe great latitude.

Drugs, and other Articles uſed in Colour-making. (20)

VEGETABLE Subſtances.

Gums arabic, ſenegal, tragacanth, maſtic, lac, copal, and dragons blood, Madder, Indigo, Woad, Weld, Sumach, Fuſtic, Saunders, Annotto, Greenwood, Logwood, Brazil, Safflower, Barks, Flower, Starch, Bran, French berries, Reſin, Aſh, Vinegar, Verjuice, Crude tartar, Galls, &c.

MINERALS

(20) Non-colouring drugs, ſuch as allum, tartar, and other aſtringents, are thoſe which after being uſed, muſt undergo the proceſs of boiling with certain colouring drugs, ſuch as madder, weld, &c. &c.—This is a dyers term, and applied to articles uſed previous to colouring.

Digitized by Google

MINERAL Subſtances, Salts and Earths.

White and yellow copperas, Orpiment, Arſenic, Corroſive ſublimate, Roman vitriol, Vitriolic nitrous and marine acids, Salt-petre, Sal ammoniac, Verdigris, Tin, Pewter, Copper, Steel fileings, Antimony, Chalk, Tobacco pipe Clay, Lime, &c.

MISCELLANEOUS Subſtances.

Urine, Dung, Lamp-black, Acid of tar, Iron liquor, Hartſhorn, (21) &c. Other articles might be added, but the above are chiefly in uſe. ---See account of drugs, &c. further on.

---

(21) The goodneſs of drugs is of the utmoſt concern, and well it is for thoſe Printers who are not under the neceſſity of being reſtrained in this reſpect ſome by choice will not have the beſt even when needed, and others for reaſons, too common in every ſtation of life, muſt take what materials they can get.

The

Digitized by Google

The moſt durable Black and Purples, are brought up in madder, by the agency of iron liquor: Reds by allum, and occaſionally tartar, ſalt of lead, and iron liquor, to vary the hue to a Pink, a Bloſſom, a Chocolate, &c. Yellows in weld, by allum and tartar: Olaves, Drabs, &c. by allum, tartar, and iron liquor: Doves, Browns, Greens &c. in Sumach, Fuſtick, Greenwood, &c. by allum, tartar, and iron liquor: Blue, from Indigo or woad, by the agency of aſh, lime, and orpiment.

Leſs permanent blacks, reds, purples, pearls, &c. are brought up in logwood, brazil, bark, &c. by the agency of iron liquor, galls, copperas, &c. but in ſkilful hands are to be much improved.

Chemical browns, buffs, pale greens, blue, ſalmon, and other colours, are by the agency of Tar acid, Iron liquor, Verdigris, Woad, Annotto, &c. brought up or ſtruck with lime, and other colours, ſuch as berry yellow, pencilled blue, procured from indigo, &c. require ſtreaming or rincing in water only.

Note, *As the above is only a ſummary, or elementary view of colours &c. a plan of a table for fixing proportions and ſhades to certain circumſtances, is offered further on.*

For conveying theſe mixtures to the cloth various articles are neceſſary to be uſed according to certain circumſtances; theſe

Digitized by Google

vehicles are gums and paſtes (22); paſte being of a more compact conſiſtency than gum diluted, is uſed when lines or fine bodies or ſhades are required to be accurately expreſſed; diluted gum is more uſed in conveying ſolid bodies, in which no great accuracy of ſhape is required.

Of gums, tragacanth has ſeveral advantages, and if properly managed, would diſtribute as well as the arabic, but this article as well as the oak-gall is not always made the moſt of.

Lampblack(23), Brazil, &c. are neceſſary to deepen the colour of thoſe mixtures, which would otherwiſe be too pale for printing, in ſome caſes.

---

(22) Paſtes are made from flour and ſtarch, and thoſe articles as well as gums ſhould be of the pureſt kind, when uſed as vehicles for carrying the colour.—Gums ſhould be tried that no ſaline quality has been incorporated with them by their having been before in a liquid ſtate by any accident, particularly at ſea.

(23) Lampblack is the leaſt innocent in general from its oily quality, it ſhould therefore be the lighteſt and blackeſt that can be had, which depends a great deal on its being well burnt, indeed it would often be the better for work if it were ſpared. Brazil is ſo innocent and the ſtain ſo eaſily removed, that little objection lays againſt it; it gives out its colour beſt with hard water.

Digitized by Google

Attempting now to ſpeak immediately of the colour-makers practice, the firſt conſideration is in what degree of reſponſibility he ſtands, both as he has to act himſelf, and as he is concerned in the operation of others; which collectively conſidered, comprizes, 1. Aſhing, Souring, &c. or the preparation for the reception of his mixtures. 2. Printing or the application of them, and 3. ſtriking or fixing them, including rincing, ſtreaming &c. of chemical ones, or thoſe not brought up in the copper,(24) for though colour-making is a diſtinct proceſs from preparation, printing and boiling off, yet (as more fully conſidered further on,) being of the utmoſt conſequence to a colour maker how they are performed, he may be ſaid to be cloſely concerned in them.

The preparation has been ſpoken of, but for the ſake of preſerving a kind of formality in treating this part, what has been ſaid will 1ſt, be briefly recapitulated; 2dly, the nature and uſe of aſtringents will be next touched on; 3dly, ſome ſuggeſtions offered concerning colouring ſubſtances; including the reſult of various experiments; laſtly, the application of his mixtures in the operation of printing, with notes and obſervations on the whole, more or leſs applicable to the ſubject, as the

(24) The fielding, may be ſaid; to be a proceſs which reſts with the foreman of the field, of which more is ſaid further on.

Digitized by Google

diſcuſſion of it leads the writer (according to the unreſtrained mode in which he indulges himſelf) to deliver them.--- See introduction, and note 2 in copper work.

It is therefore firſt obſerved, that as goods appropriated for printing, though having undergone the proceſſes in uſe among whitſterers, or bleachers by profeſſion, may nevertheleſs contract in the courſe of their removal from one place to another, foulneſſes of various kinds: they are in general ſoaked or ſteeped in water, that any looſe dirt may be removed; but there may be foulneſſes which water only will not remove, of courſe ſomething more penetrating muſt be applied; if aſh be uſed, it is preſumed ſome unctuous ſubſtance is to be removed, which the aſh effects; but as the earth of the aſh is ſuppoſed to be left in the cloth, which water will not eaſily remove, an acid is to be applied for that purpoſe, or ſometimes to anſwer for aſhing, and the cloth thus (after the uſual proceſſes of planking, &c.) is rendered as pure and white as poſſible.

Here then commences the colour-makers immediate concern, and conſequently the conſiderations reſpecting it, of which, it need hardly be ſaid, the firſt is that of the nature or properties of thoſe ſubſtances that are requiſite to form a baſis for the colour, chiefly in reſpect to the relation

Digitized by Google

lation they hold with each other in view of producing certain effects, according to the principles as eſtabliſhed by nature, which principles in the firſt caſe are applicable only to chemical experiments (as exhibited in the tables of affinities and the rules immediately preceding them) but in advancing a ſtep further, that knowledge muſt be conſidered as furniſhing us with means of turning thoſe experiments to advantage; therefore a colour maker when ſurrounded with his drugs &c. ſhould look upon every article as an inſtrument in his hands, that ought not to be employed in vain; but this knowledge, to its proper extent (ſo rarely to be met with) is not to be acquired merely from ſelf experience or the experience of others, and not only that ſuch ingredients mixed or applied in ſuch a manner will produce ſuch effects, but why and upon what principle it is eſtabliſhed, and by what laws it is governed: here is the ſpring that ſhould give motion to this department; here is the baſis on which the practice ſhould be erected and diffuſe itſelf; and here originates the grand ſource of a colour-maker's practice, namely, the knowledge of the laws of affinities, and the certain effects of combinations, previous to the adding of certain ſubſtances to each other: for in every mixture that can poſſibly be made, invariable effects according to thoſe rules will naturally follow.

Digitized by Google

Thus beginning with the principal articles in a colour-maker's province (see note 39 at the end of copper-work) namely, ſalts or aſtringents; (ſee note below) it is neceſſary to know, according to thoſe rules eſtabliſhed by nature, how each ſpecies affects any ſubſtance it may be offered to, and how it is affected in return; for all ſubſtances mixed with others of different qualities, muſt cauſe a change in ſome reſpect or other, according to the fundamental principles as exhibited in the beginning of the compendium of chemiſtry, (ſee rule 3) and this knowledge (it is again ſaid) is the proper foundation or ſupport of the practice of colour-making.

2d, *Of Articles that procure from various Subſtances their colouring Properties.* (25)

The articles of this deſcription are very numerous, and are the chief or only agents we are in poſſeſſion

(25) Theſe are chiefly allum, lime, marine ſalt, nitre, ſal-ammoniac, tartar, fixed and volatile alkalies, with various metallic ſalts, and are in general called aſtringents, though rather forced, as aſtringent is more applicable to medicine, and ſome articles have aſtringent and colouring qualities united, as galls, ſumach &c. but ſalts or acids would be too general terms; and technicals frequently want allowance in the uſe of them; thus, ſpecifically ſpeaking, lime is cauſtic; aſh, alkaline; tartar, acid; allum, ſaline; &c. hence, though not a practical term in printing, wherever aſtringent is uſed it alludes to ſtriking or fixing the colour.

Digitized by Google

poſſeſſion of, in procuring permanency of colour, and the moſt general in its application is allum; its ſuperior power is confeſt by its uniting two qualities, heightening colours, and fixing them at the ſame time. (26)

Colours that are not permanent, are, it is apprehended, owing to the want of ſome ſuch ſubſtances being previouſly applied to the cloth, or of not being able to unite with them; hence (as has been ſaid) the colouring particles not finding pores

(26) The manner of ſalts being applied in dyeing is different, according as the ſubject is wool, cotton, ſilk, velvet, thread, &c. their pores being different, in various reſpects, and conſequently their aptitude to receive colour is ſo likewiſe: thus ſome ſubſtances, as cochineal and kermes, that in dyeing give a ſcarlet to wool (which is the eaſieſt ſubſtance to colour) give a very dull one to ſilk and cotton, and require a larger quantity, ſee note 36 and 41. The remark is likewiſe applicable to the different manufacturing of goods; and it is mentioned in the beginning of Bleaching, that the preparation is neceſſarily different. This is intimated here to thoſe who think it is indifferent what ſubject any tingeing ſubſtance may be applied to, and may have occaſion to print an other articles than cotton or linen.

Digitized by Google

pores ſufficiently open to imbibe them, are ſuppoſed to lay chiefly on the ſurface.

Lime has the property of uniting two of the greateſt oppoſites in nature, Salts and Earths; it is ſoluble in water, by means of fire; but the air renders it indiſſoluble again; thus it is capable of forming an unalterable cement when united with other matters; but allum, as above-ſaid, has a property beyond, which is that of attracting certain colouring particles (27): nitre, marine ſalt, ſal ammoniac, ſacrum ſaturni, and tartar, are, ſtrictly ſpeaking, only alterants, by changing the red to a crimſon, a bloſſom, a pink, &c. Neutral ſalts with a metallic baſis, rather give ſtrength to the colour, than ſolidity in reſpect to its fixity, for every colouring ſubſtance will vary its ſhade, according to the nature of the earth that attracts its particles:

Two neutrals, Copperas and Roman vitriol, with metallic baſes, are in common uſe, owing to their aſtringent quality being in union with their alterative principle.

In

(27) Roman allum being white, and pure, is the moſt proper, as rock allum contains iron.— See Pomet on drugs and the compendium of chemiſtry.

Digitized by Google

In procuring a black, it is in general by introducing within the pores of the cloth, particles of iron diſſolved in various liquids, and precipitating them on the ſubject by means of ſome aſtringent ſubſtance ſupplied with phlogiſton, ſufficient to render the iron black; but this ſhould be done ſo that the precipitating matter do no injury, and that can only be accompliſhed in proportion as the particles are diſſolved.(28)

It

(28) Iron, rather than cauſing a black, contributes to it from the effect of its attriction, as oak turns black by ſawing; white greaſe is made black by its friction with iron; green fruit turns black if cut with a knife; the black colour in earthen ware is owing to vitrified iron; and copperas which is uſed in procuring a black, is the ſalt of pyrites, with which iron is incorporated.

The cauſe of rottenneſs, attributed generally to the copperas, uſed in procuring black, is owing to the earth of iron (where it is uſed) not being ſeparated from the ſolution, and when ſaid to be rotten from copperas, it is from the groſs particles not finding eaſy admiſſion into the pores; hence they in a manner burſt open their encloſures, tearing of courſe, the parts that reſiſt.—See iron liquor further on.

Digitized by Google

It is to be underſtood (as before ſaid) there is no black ſubſtance, vegetable, animal, or mineral, that poſſeſſes the durable tingeing properties of indigo, madder or weld (theſe blue, red and yellow ſubſtances are mentioned, being moſt in uſe) for all black fœculencies are of too dry a nature to be introduced and fixed in any ſubject, either by any adheſive quality of their own, or by the previous uſe of aſtringents, as they only act on unctuous ſubſtances. (29) Galls, ſumach, logwood,

---

(29) Here, according to the laws of affinities, (which ſhould always be borne in mind in whatever relates to colour-making) it is ſaid (though obſerved before, ſee article maddering) that between the aſtringent introduced to fix the colour, and the colouring ſubſtance itſelf, there muſt be a mutual attraction, or a greater one than between either of the ſubſtances and the liquid in which either may be ſuſpended, elſe they cannot unite ſo as to form that cement which cauſes permanency; hence (as before obſerved) there are no black ſubſtances that any ſaline aſtringent will take hold of, and even from their natural dryneſs, their particles keep at too great diſtance in water, ever to attract each other ſufficiently.—See note 31.

Digitized by Google

logwood, &c. containing within them the primitive colours, blue, red, and yellow, it is thought a black is produced from a combination of them, and according as either is acted on by the salt of copperas or iron, and as made use of for procuring a black, it indicates by the shade that is left when the black is flown, on which the salt was employed. (30)

Of

(30) Hellot and D'Apligny says there are many plants, which, treated like the anil (from which is procured indigo) would probably produce a black feculence, such as the liquorice root, choak weed, and several others, as mentioned further on in speaking of colouring substances; Dr. Lewis, however, doubts it.

The antient Gauls used myrtles in dyeing purple, and it is thought with the use of astringents a black might be raised with them, as well as from the barberry or prickly sorrel; though some who have tried have not succeeded: Linnæus says, St. Christopher's herb gives with allum a black, and Hellot says, a tree in the Brazils is of such a black tingeing quality, as to dye the flesh and bones of animals that eat it, black, similar to the red effect of madder: the anacardium nut is said to produce simply of itself a fast black: but in cases of this nature it is not much to be expected that persons will go out of an old track,

and.

Digitized by Google

3. *Of Articles containing* COLOURING *Properties.*

Various ſuppoſitions reſpecting the fixity of colours by the uſe of aſtringents have been mentioned, though (as intimated Note 29 in copper-work) the theory generally adopted is conteſted; and it may here be added, that Mr. Macquer likewiſe conteſts it, he however obſerves, that when the earth of allum, after being conveyed to the cloth, is moiſtened, it imbibes the colouring particles of the bodies it meets with, though the cauſe of the attraction is unknown (31), (ſee

---

and if inclined to it, ſufficient quantities of ſuch articles are not to be procured till cultivated for ſuch purpoſes.—See note 42.

In general, infuſions of aſtringent vegetables mixed with green vitriol, produce black; rain water catched in the open fields has a blueiſh caſt, but what is catched from houſes grows purple, from ſome alkaline quality it thus receives.

(31) The acid of the allum is the vehicle for carrying the earth into the pores of the cloth: this ſubſtance, from being moiſtened, ſhews a diſpoſition to unite with the principle of inflammability, on which colours depend.

The principle of attraction conſiſts in 1. The aſtringent and the colouring ſubſtance) muſt be mutual

Digitized by Google

(see note 28 on copper-work, and the article maddering, where what is here said is alluded to) thus, according to the laws of affinities, the colouring particles would remain in the liquid in which they may be floating, such as the particles of madder, but that the earth of allum has a greater affinity with them, from their unctuous qualities, than they have with the water: (32) in cases where the earth of the allum does not attract the colouring particles, these particles may however have less affinity with water than those which need this earth to fix them; hence though they enter the pores, yet, from their minuteness, they are not retained, nd from their soapy qualities are soon washed off; but the unctuous quality above spoken of, and the phlogiston incorporated with it, is supposed by its union with

---

mutual in their powers of attraction. 2. They must be at a distance proportioned to their powers of attraction. 3. This force must be superior to that with which either is attracted by the fluid it is in.

(32) Acids having greater affinity with alkali than with earth, they leave the earth in form of a precipitate. See Rule 2, of the principles of combinations.

Digitized by Google

with the aſtringent to form that cement often ſpoken of, though with dry ſubſtances ſuch as zaffre, cinnabar, ochre, &c. it cannot be accompliſhed, however moiſtened the aſtringent may be, as the colouring particles would ſoon eſcape. (33)

Adverting to the doctrine of a vitriolated tartar (ſee introduction to maddering) Mr. Macquer

---

(33) It is a knowledge of this nature that callico-printers are requeſted to acquire, in order to aſcertain the quantity of madder, weld, &c. neceſſary to be uſed as mentioned in maddering. —See the article Maddering.

As lakes are cauſed by the combination of one ſubſtance with another, upon a principle ſimilar to what is above alluded, it will be here juſt obſerved as an example, that if a decoction of turmeric or madder, be made in a watery ſolution of fixed alkali and a proper quantity of ſolution of allum be added, the yellow or red particles will ſubſide; but at the ſame time the acid of the allum being abſorbed by the alkaline ſalts, the earth of the allum likewiſe ſubſides and dilutes and likewiſe brightens the colour, the cauſe of this operation is however allowed to be not fully known.

Digitized by Google

obſerves he cannot ſuppoſe it perfectly ſtable(34) but the earth of allum or lime containing the phlogiſtic principles of colour, conſequently thoſe colours are produced, that are incapable of being deſtroyed except by acids; theſe phlogiſtic principles (as before obſerved) are earths, oils, and

(34) In callico-printing this ſeems to be the caſe, from the danger purple and ſometimes the reds are generally in, when in the weld copper, but this is moſt likely to be the caſe when tartar or ſaccharum is uſed, they being (as obſerved before) only alterants. It may however here be ſaid, that the ſame ſalts being again uſed, may in ſome degree join with thoſe that were uſed before, ſeparating them, as it were, from the other ſubſtance to which they are joined; or it may be ſaid (ſee below) that the yellow particles find admiſſion into pores, not filled by the red or purple, when opened by the hot water.

Their ſolubility, as well as that of the allum before formed into a cement, by uniting with madder, &c. is oftentimes too evident when one colour is laid over another, even when ſtowed as much as poſſible, (in Printers' phraſeology the colour is ſaid to run) and this is particularly evident in heavy ground-work, and moſt ſo in black grounds, with large maſſes of purple.

Theoriſts do not ſeem clear in the caſe of

Digitized by Google

and ſalts, from the quantity and quality of which all colours reſult, and the ſimple addition of any ſalt to any oily vegetable colouring ſubſtance will either vary or expel its colour, becauſe any ſalt ſimple or compound, deſtroying by the laws of affinity the combination ſubſiſting till then; the rays of light are differently refracted, therefore thoſe ſubſtances whoſe colour cannot be altered by any ſalt, are thoſe whoſe phlogiſton is perfectly combined with their other principles; indeed if we perfectly knew the nature of theſe combinations, it would help us in making artificial compoſitions, by analyzing theſe permanently tingeing ſubſtances, but not knowing (as obſerved before) the manner in which theſe principles

---

ſeveral colours, raiſed at once, or in ſucceſſion; as where purple is laid over red, blue over yellow, yellow over purple, or over purple and red, and ſo on; as here it can only ſeem that the ſalt firſt conveyed does not enter all the pores, but that it contracts ſome, and leaves others open, which in turn are entered by ſucceeding applications; ſome have thought that every pore would admit any number of colouring particles, one above another, and that as they ſucceeded each other, like blue over yellow making a green, different ſhades were accordingly formed.

Digitized by Google

principles are combined, as the utmoſt we can do, is only ſeparating them by decompoſing the colouring ſubſtances, we are under the neceſſity of endeavouring to improve on the known means with which nature has ſupplied us.

The juices of vegetables that will not give a faſt colour, are liquids combined with certain oils, and being eaſily converted into a kind of ſoap, by alkalies or neutral ſalts, are ſoon removed; for in this caſe (turning to the laws of affinities) the colouring particles are ſo intimately united with the fluid in which they are ſuſpended, that the earth of allum will give their dyes no ſtability. It is however thought poſſible that ſubſtances may be rendered permanent in their colouring properties, that naturally are not ſo, could abſorbent earths be introduced into their pores, (35) or by adding acids to the colouring juices, in order to decompoſe the ſoap, and facilitate the union of the aſtringent with the colouring ſubſtance; notwithſtanding ſuch decompoſition might produce

(35) In Percival's Eſſays it is ſaid that logwood may be rendered faſt, by a preparation with fixed alkali.

Digitized by Google

a change in some respect with the colour. From animal juices colouring substances are rarely obtained; and could more be procured, it would be only going a further way about, as animal juices are derived from vegetable substances.

As the merely simple juices or fluids of animals and vegetables, rarely furnish materials for durable colours; and minerals, on account of their dryness are incapable of being attracted by astringents, we must seek those substances whose principles form, or help to form that unctuous and phlogistic gluten or cement which is the cause of permanency; and of these the most able to impart their colour are, kermes, cochineal, gumlac (36), madder, weld, &c. being both gummous and resinous, though in different degrees, or in other words possessing that phlogistic or inflammable property resulting from the union of oils, salts, and earths, on the various combinations of which, colour (as repeatedly said) depends, and which exhibit themselves when attracted by the application of proper astringents. Brazil, log-wood,

(36) These 3 belong more to dyeing, yet might nevertheless, be used in printing, but the price is against them:—Kermes was much used formerly by dyers, but cochineal is now substituted.

Digitized by Google

wood, fuſtic, &c. being particularly reſinous, their colouring ſubſtances are not ſo eaſily attracted by aſtringents, and the colour they give is therefore of leſs permanency.

Yellows are to be procured from moſt leaves, barks, and woods, that on chewing diſcover an aſtringent taſte, if treated in the ſame manner as weld; for the colours of moſt yellow flowers are durable, and are little affected by acids or alkalies, but other coloured flowers, as well as juices of plants, are rarely found to poſſeſs any permanently tingeing qualities, according to the experiments practiſed in common.

Reſpecting the general method of imparting permanent colour, the principle of the proceſs is but ſimple, (ſee note 39 in copper-work) ſaline ſubſtances being (as ſaid before) the chief means with which we are acquainted; thus, it may be obſerved, though a watery infuſion of madder and other articles, will impart a tinge, yet waſhing will eaſily remove it; but that is not the caſe if the cloth have a ſaline article previouſly applied to it; there is however an exception to this rule in indigo, which it is difficult to

diſſolve

Digitized by Google

diſſolve (3) except by alkalies, oil of vitriol, orpiment, or combinations of orpiment with ſulphur. When diſſolved by alkalies, the colour is green, the colour naturally produced in vegetable blues by alkalies; but on expoſing cloth dipped in it to the air, it turns blue: other exceptions in vegetables are mentioned elſewhere, as likewiſe the received opinion why they are ſo.

Proceed,

(37) The great ſolvent power of alkalies, by clearing away the ſordes, will help to bring the particles of indigo more in contact with the cloth: the cauſe why cloth, which when dyed by indigo, is green, turns blue when expoſed to the air, is thought to be owing to an attraction of the fixed air, by the alkali from the atmoſphere rendering the ſalt unable to diſſolve the indigo any further.—See Hellot on dyeing, but Dr. Lewis diſputes Hellot's theory; he ſays acids will affect the ſame appearance, and that with vol. alk. it ſhews no green. Hellot however, ſhews unleſs green appears it is not diſſolved, hence fixed alkalies are only proper.

In the ſolution of indigo by alkalies, lime encreaſes the diſſolving power, and if raiſins be thrown into the ſolution it throws up a copper-coloured ſcum, which gives a dye in a moment: Pruſſian blue digeſted in an alkali, will produce a blue if what is coloured with it, lays a little while in a weak ſolution of copperas, but very inferior to indigo in durability. Dr. Lewis gives a recipe for making blue colour, but few practitioners will approve of his proportions.

Digitized by Google

Proceeding further in the diſcuſſion of colouring qualities, it may be obſerved, as the fixity of colours produced by different ſubſtances being mixed together, is proportionate to the power of ſuch ſubſtances to withſtand the weather, it would ſeem as if there were ſome method to determine on their permanency, ſince it appears that the nitrous acid in general tends to heighten red colours, the vitriolic to crimſon them, the marine to dull them, and alkalies to deepen them, (38) for, in this caſe, the colour produced by the nitrous acid, can remain no longer, when expoſed to the air, than the ſpirit of nitre itſelf, becauſe the nitre being drawn into the air, the colour muſt fade; and the diſpoſition of colour to fade, muſt be in proportion to the permanency of the ſubſtances that produce them; colour, in this ſenſe, being only colour as it is in poſſeſſion of ſome ſubſtance to withold it; (39) but

(38) In drying plants between ſheets of paper, the paper is at laſt tinged with colour; this is ſuppoſed to be occaſioned by the allum uſed in making it —By rubbing a plant on blue paper, if acid, it turns the paper red, but green, if alkaline.

(39) Similar, in one reſpect, to the above obſervation, it may be ſaid, that among callico-printers a great point to attain in making colour, is to render the

Digitized by Google

but whatever ſubſtances are moſt proper, it is certain that on combining acids with alkalies, earths

---

the articles for the purpoſe of printing, all equally buoyant. It may be ſaid too, that in all compoſitions there is the baſis which is ſuppoſed to be unalterable in its effects; other matters may be added; but from them, certain modifications only, will be the reſult; hence this principle ſhould be much thought of, that the more ſimple the baſis of the compoſition is, the more eaſy is a variation to be made; and, in a contrary light, if what is ſuppoſed to be the baſis, be compounded; as for inſtance, in a blue and yellow put together to make a green, it is highly probable that what may be added will diſagree with either the blue or yellow more than the other, and if more articles are added, the leſs certainty there can be of an effect.

In endeavouring to make a green, if a yellow feculence could be procured from a vegetable, as a blue one is, and that theſe two on being mixed, would perfectly unite, and be equally buoyant in whatever vehicle they may be uſed, there would be the ſtability required, for in this caſe, both partaking the ſame durable qualities, of courſe one would remain as long as the other, and thus the green might be ſaid to be permanent; but at preſent there is a

Digitized by Google

earths and minerals, effects are to be produced ſo infinitely various, that no rule can be preciſely laid down to determine on what appearances will enſue on ſuch combinations, or how this or that particular ſalt will affect, or be affected, by this or that ſubſtance; ſee a few experiments below: (40) however, among theſe various articles

---

difficulty even in rendering the pencilling blue ſufficiently buoyant, ſo as to print with it; this is however practiſed in the country, but the colour is generally uneven, and ſeems only practicable in dark grounds, from the latitude the grounding requires.

(40) If concentrated oil of vitriol be mixed with ſtrong ſpirit of nitre, or of ſalt, the acid that is weakeſt will become very volatile, and throw off very elaſtic fumes; and if put into a cloſe ſtopt bottle, would very probably burſt it: the ſame will happen by mixing ſpirit of nitre and ſpirit of ſalt together; ſuch mixtures ſhould therefore only be made when wanted.

2. Vitriolated tartar and ſtrong ſpirit of nitre, in equal quantities, diſſolved, by being heated together in a mattraſs, the ſtronger vitriolic acid will be diſplaced by the weaker nitrous one, and cryſtals of nitre will be formed from it: the ſame will happen if ſpirit of ſalt be uſed inſtead of nitre. This experiment

Digitized by Google

articles it is known that imperfect neutral ſalts act powerfully, the perfect ones but weakly;

---

riment ſeems to oppoſe the general opinion, that the vitriolic is ſtronger than the marine or nitrous, unleſs it be underſtood that quantity is obſerved more than quality.

3. If vitriolated tartar, or Glauber's ſalt, diſſolved in water, be mixed with another ſolution conſiſting of calcareous earth, ſilver, mercury, lead, or tin, diſſolved in the nitrous or marine acids, the vitriolic acid will leave the fixed alkali with which it was combined, and unite with the calcareous earth, or the metal, and fall to the bottom. Any acid may be uſed for this purpoſe, for here the vitriolic acid meets with ſuch bodies as it cannot eaſily liquidate. This experiment ſhews, that the additament of water weakens the attraction of acids with alkalies or metals.

4. By dropping a ſolution of vitriolated tartar into lime, the acid will unite with the lime and precipitate with it into an indiſſoluble ſelenite, the alkali remaining pure in the water.

5. Green vitriol mixed with any ſolution containing ſubſtances which cannot be diſſolved by the vitriolic acid, ſuch as ſac. ſaturni, the vitriol will be immediately decompoſed, and combine itſelf with the

Digitized by Google

ly; (in neutral ſalts the acid is the menſtruum, and the alkali the baſis, in imperfect neutrals one quality

---

the lead, and thus become merely a ſolution of iron.

6. In the mixture of a ſolution of tin in aqua regia, and ſolution of ſacrum ſaturni, the marine acid will quit the tin, and unite with the lead of the ſaccharum, the acetous, or, perhaps more properly, the vegetable acid combined with the lead, will at the ſame time be kept ſuſpended, by the lead being unable to diſſolve the tin; hence both being effectually decompoſed, the mixture of courſe is uſeleſs.

7. Mild volatile alkali united with a quantity of fixed air, and poured into a ſolution of chalk in the nitrous or marine acid, will precipitate the earth, and form a true ſal ammoniac; and if the whole be evaporated to dryneſs, and a conſiderable heat applied, the acid will again part with the alkali, and unite with the chalk.

8. By mixing together, and ſubliming equal parts of ſal ammoniac and corroſive ſublimate, they unite in ſuch a manner as not to be ſeparated without decompoſition: this compound is a very powerful ſolvent of all metallic ſubſtances, even gold itſelf.

9. By pouring vitriolic acid upon any ſalt, difficult to diſſolve in water, it becomes then eaſily ſoluble; thus vitriolated tartar and cream of tartar may be diſſolved.

Digitized by Google

quality predominates) thus, making a tranſition to what is relative to dyeing, ſee note 41; allum and ſal ammoniac heighten cochineal, madder, log-

It may be added, that on calcining fixed alkalies with the charcoal of aſhes of various vegetables, ſuch as, ſouthernwood, ſage, rue, fern, pine-tops, &c. different coloured appearances will enſue, owing (it is ſuppoſed) to ſome proportion of the oily or phlogiſtic matter (on which colours depend) of the vegetable remaining in the aſhes from which the ſalts are extracted: the ſalts thus obtained will produce different colours in the metallic ſolutions, precipitated by them, in this ſtate.

Acid infuſions heigthen red flowers in general, and many red, white and blue flowers are turned green, then yellow by alkalies, but which have little effect on yellow flowers, and ſome articles that alkalies turn red, purple or blue, are changed to a yellow by acids.—See Boyle and Lewis.

The affuſion of ley will likewiſe procure from various flowers, inſects or caterpillars, blue, purple or carnation colours, but in general, the flowers or plants that will not give a durable tinge with ley, are deſtroyed by it; there is however more hopes of faſt colours being obtained from roots.

Among vegetables on which experiments have been tried, are the hemlock, producing a green: the wild

Digitized by Google

logwood, brazil, fuſtic, &c. but Glauber's ſalt, ſalt-petre, common ſalt, and other neutrals, act leſs

---

wild lettuce and thorny ſow-thiſtle, a yellow; the fungus tuboloſus, a purple; and the celandine and wild patience, a blue.

In Linnæus's works, mention is made of a quantity of moſs having rotted by the ſea ſide, which produced a beautiful and durable red colour; and 2 kinds of moſs are in uſe in Sweden for dyeing red.

Were the writer inclined, he could ſwell this work to any ſize, by extracts from various works, with experimental articles, but very few would be of real ſervice, and the majority are far from being inconteſtible, (ſee note 28 in copper-work) the beſt however of the kind are to be found in Hellot and D'Apligny on Dyeing, Lewis's Notes to Neuman's Chemiſtry, his Commercium Philoſophicum Artium, and in L'Memoire d' Academé d' Art et Sciences, and various chemical treatiſes.

As for the Polygraphic Dictionary, School of Arts, School of Wiſdom, and other collections of that nature, they contain too much traſh to compenſate for what little may be valuable.

The beſt account of drugs is to be found in Pomet's Hiſtory, in Lewis's Notes to Neuman, and in the Chemical Dictionary.

It

Digitized by Google

leſs powerfully. A black is ſtruck in the above ſubſtances (madder, logwood, &c.) by ſolutions of iron, likewiſe with ſumach, galls, and other aſtringents; ſee note 25, ſolution of ſacrum ſat. acts as an alterant on red colours (as already ſaid) ſolution of copper changes logwood purple to a blue, and is reconcileable to moſt blues; ſolution of the ſuperior metals, gold, ſilver, and mercury, have the leaſt pleaſing, or leaſt extenſive effective powers; (ſee the chemical compendium) but in this reſpect, ſolution of tin in aqua regia takes the firſt rank, having a ſurprizing power of coagulating the colouring matter of many articles; thus it procures

---

It is here offered to ſet perſons right in reſpect to colours, who affect to ſay, that as good or better were done fifty or ſixty years paſt, for as good were done two thouſand years or more paſt; the very means as well as articles being of as ancient a ſtanding; indeed the origin can hardly be traced: ſo in printing, the method immemorial, has been by uſing allum, &c. to procure and fix the colouring particles; it may be even ſaid, what we call new colours, have been produced many years paſt, under different appearances: if there be any real improvements, a principle one is in the mode of cleanſing the cloth, and that perhaps is only in being rather more expeditiouſly performed than before.—See three or four leaves further on, and note 10 in the retroſpect.

Digitized by Google

cures from cochineal and gumlac a fine ſcarlet; from brazil a fine red; from logwood a beautiful purple; and from weld, fuſtick, turmerick, and many common yellow flowers more beautiful colours than can otherwiſe be obtained. It likewiſe changes to a red the colour of moſt blue flowers, but as a counter-balance it in ſome meaſure deadens madder, ſafflower, and archil, and changes the vitriolic tinctures of roſes from a red to an indifferent green. (41)

Solution of tin, (it may be added) is likewiſe the beſt article to try the durable quality of a vegetable ſubſtance; for in general, where the ſolution does not deſtroy the colour, there is a probability of ſucceeding with it; but this ſolution will not combine with ſeveral ſubſtances, particularly with ſugar of lead and cream of tartar (as already mentioned) neither will it unite with any calcareous

(41) In the vitriolic acid it brings hues from the bright pink to the flame, in aqua regia it brings a ſcarlet, in the marine it brings a dull colour.

Note, Where ſolution is mentioned it ſhould be underſtood as occaſionally diluted.

The calx of tin (Sal Jovis) is uſed in dyeing to procure the fine ſcarlet from cochineal; and in this caſe is ſuperior to allum.—See the proceſs in Hellot on dyeing.

It may

Digitized by Google

careous earth, nor alkalies; but with allum it may, and is bettered by it.

The aſtringents proper for procuring the colour from madder (as already ſaid) are allum and tartar, ſacrum ſat. ſolution of iron in a vegetable acid, &c. Iron liquor mixed with the red renders it, according to the quantity uſed, chocolate, pompadour, or brown red, (as obſerved before) but it muſt be carefully avoided in preparing for pale reds.

In proving the fixity of colours, lemon-juice, vinegar, aqua fortis diluted, &c: are inſufficient, their degree of acidity being very variable; but ſolutions of allum, white ſoap and red tartar are more proper. For

---

It may here be repeated (ſee note 24) that what will give colour to wool, will in ſome caſes, give little if any, to ſilk, linen, or cotton, as wool is ſuppoſed to contain larger pores, and is of an alkaline quality; and in ſome caſes it gives different colours, ſuch as a purple to wool, while with linen or cotton it will be red.

Volatile alkalies heighten madder colour, though it hurts its permanency; but practices of this kind ſhould not be made public, too much being done in that way, as is evident enough in country work.— See note 32 to copper-work.

*** It has been ſaid this is partly applicable to dyeing, for in diſcuſſing the theory of colours, it could hardly be avoided.

Digitized by Google

For diſcharging colours, alkaline ſalts only are effective where ſolutions of tin have been uſed, or the cloth otherwiſe ſtrongly coloured, and even then it requires graſs bleaching; but vitriol diluted will diſcharge colour procured from logwood, where allum has been uſed, though with more difficulty if lampblack has been added.

☞In the compoſition of penciling blue colour, by the alkaline ſalts being intimately blended with the indigo, the ſame purpoſe is anſwered as when allum or other aſtringents are previouſly applied in procuring madder colours, and by treating other articles in a ſimilar manner, may therefore be conſidered as a baſis for what is called chymick printing, or as bringing to a point what has been ſaid concerning the procuring of colours by the ſimpleſt operations; that is, where a ſaline or an aſtringent ſubſtance and a vegetable colouring one can be united, a durable effect may probably be obtained, as a great number of different coloured feculæ or dregs, are very likely to be procured from various plants, ſimilar to the proceſs for procuring indigo, woad, or archil; (42) or by precipitation in the

(42) Woad is of the ſame nature; archil is procured from a moſs.—See notes 30 and 40.

Digitized by Google

the manner of procuring calces of metals, or lakes from vegetables (see note 33, and end of note 40) and with proper solvents and thicknings might be made useful in printing; but, as it is not the design of this treatise to create colour-makers (43) a deal must not be specifically said on this score (difficult as it certainly is, to steer between saying too little and too much) since common operators in that way (see the beginning of this section) notwithstanding what has been, or may be said, as advising a better mode, would catch hold of any thing likely to be put into immediate practice, rather than think a little and act in consequence.

This work not being addressed to those unacquainted with the use of drugs, &c. and it not being intended unnecessarily to swell it, the reader has been referred, (see note 40) to certain works for accounts of such articles; but, as this part of the section would by many be deemed inconclusive, without saying something of colouring drugs, a concise account is therefore annexed.

---

(43) For the writer's sentiments on the inefficacy and impropriety of giving recipes for making colours, with some general reflections on chymick printing, see the end of this section.

Digitized by Google

MADDER, under various names, is of very ancient uſe; there are various ſpecies, the beſt is imported from the Levant, though that from Zealand is moſt in uſe; the root of the beſt is of a lively colour, and when powdered and put on blue paper inſtantly adheres; (Printers in trying it generally make infuſions) it ſhould likewiſe be paſty and unctuous, and when dried and ground ſhould not be above a year old; the red of this root is conſidered as a fixed oil united with an acid, giving it the nature of a bitumen.

WELD, of all yellow colouring ſubſtances, and there are more than of any other colour, gives with eaſe the trueſt dye, and every part is uſeful; It is cultivated in large quantities in many parts of Englnd, the thickeſt is the beſt.

FRENCH-BERRIES are uſed as a ſubſtitute, but, as well known, are much inferior in colour and durability.

FUSTICK is a ſpecies of the mulberry tree, growing in Jamaica and Brazil, it very readily gives its colour with a moderate warmth; Old Fuſtick gives a darker colour than young. Sumach and various barks have ſimilar effects.

INDIGO.

Digitized by Google

INDIGO is of many ſpecies, it is procured by large quantities of a certain plant (ſee note 30) being highly fermented, and the feculence moulded into lumps: the ſort moſtly uſed comes from America, but the beſt is made at Java; it floats on water, is almoſt violet, and ſparkles when broken; or if expoſed to a fire, it will conſume immediately. WOAD is procured in a ſimilar manner.

LOGWOOD or CAMPEACHY-WOOD, grows plentifully about the Bay of Honduras, and lately has been introduced into Jamaica; it generally comes over in large logs.

BRAZIL is a general name for this wood, wherever procured; the ſoundeſt and higheſt in colour is the beſt; to extract the colour by water, hard water is the propereſt.

IRON-LIQUOR is generally procured by a ſolution of iron in ſtale beer; formerly it required twelve or eighteen months, though now procured in a very ſhort time; but whether in all reſpects it is the better for it, will not here be decided; however, Gatty's is now in requeſt by many printers, but ſtill good old Iron Liquor has its value.---See note 28.

OAK-GALLS

Digitized by Google

OAK-GALLS are excreſcences from the ſtem and branches of the tree, cauſed by the puncture of inſects, in order to depoſit their eggs.

ALLUM, TARTAR, SALT of LEAD, &c. are ſpoken of in the compendium of chemiſtry.

KERMES, is an inſect which feeds on an aſtringent ſhrub, and though little in uſe, all allow is not excelled by any article for imparting its colour, which is a bright red, variable by uſing different ſalts.

GUM LAC is a bright red colouring drug, produced by the moiſture left by a ſpecies of ants on the branches of trees in the Eaſt Indies, which is hardened by the ſun and air: ſome think it is a moiſture which they draw from the trees.

COCHINEAL is an inſect found on the Opuntia, a ſpecies of the Fig-tree; acids and alkalies eaſily vary its ſhade; it is chiefly in uſe in dyeing ſcarlet, as a ſubſtitute for Kermes:— The beſt carmine is made from this inſect; carmine is likewiſe procured from ſcarlet rags, by extracting the colour, which is in reality the cochineal itſelf.

Note,

Digitized by Google

Note, The three laſt articles are little in uſe among Printers (cochineal in ſome caſes excepted) but as well as Coccus Polonicus, various red and green Woods, Archil, Roucou, Walnut Rinds, Santal, and many other colouring and aſtringent ſubſtances, in uſe among Dyers, might certainly be rendered uſeful if needed, in callico-printing; hence it ſeems a reprehenſible circumſtance in many Printers, treating the art of dyeing with little concern; for the principles of it include the foundation of printing, as far as procuring colours are the object; conſequently, thoſe who wiſh to extend their knowledge, whether for amuſement or intereſt, might undoubtedly find advantage in peruſing works, either on the theory or practice of dyeing; and therefore the writer has occaſionally had recourſe to it (ſee note 41) but, however improvements in any ſhape may be recommended, deviations from efficacious and eſtabliſhed modes ſhould not be made without proper reflection, much leſs from a mere love of innovation, for every innovation is very far from being ultimately an improvement, or otherwiſe advantageous, and articles already are perhaps not ſo much wanting as a proper uſe of them, by bringing them under ſuch regulations as to enſure ſome certainty of effect in their application.

Of

Digitized by Google

4th. Of the Application of Colour in the Operation of Printing.

As every Colour-maker muſt grant that he cannot always enſure any particular piece to be ſo well executed, as that his mixtures ſhall have their proper effect; or that any two or more pieces ſhall be alike at the laſt ſtage, it muſt be allowed it is neceſſary to enquire into the cauſes; if on enquiry they are not clear, there certainly is a probability of their originating in ſome circumſtance that has paſſed unnoticed, or been really thought not worth noticing; the buſineſs then is to endeavour to develope theſe cauſes; for a circumſtance trifling in itſelf, or little obvious in its beginning, may lead inſenſibly to others, till a number being accumulated and combined, the conſequences then are viſible enough to make them a matter of importance: this therefore is one idea in taking up the ſubject of this part, and a few obſervations will accordingly be offered on ſeveral circumſtances attending it: beſides, as they are intimately connected with the operation of printing, of courſe they may not be unworthy a printer's conſideration, eſpecially as it may be added, that it includes the

Digitized by Google

the theory or principle of printing itſelf, which is, that according to the blow or impreſſion given, the colour is received by the cloth, and the intended effect, as far as printing is concerned, is or is not obtained, allowing for the ſtate of the cloth, colour, ſieves, &c. for it may be ſaid, that if there be any need for ſtriking any print or ground with the maul, why ſhould not all be ſtruck alike? but to this it is aware it may be replied, that a line will give the colour eaſier than a ſolid, and, to view it rather philoſophically, a ſolid may be conſidered as an aſſemblage of lines or points, therefore the ſmall force needful to cauſe a line to furniſh, muſt be increaſed or multiplied, to cauſe the body to furniſh in proportion: but be this as it may, it ſeems to be among thoſe circumſtances that cauſe appearances not at all expected, and therefore whether the obſervations here made, have any weight or not, the principle on which they are raiſed, cannot to a thinking Colour-maker be totally unworthy his regard; for as before intimated, merely making colour is no great ſecret, nor is it treated as ſuch (ſee note 48) the grand matter being in accommodating it to the cloth under all poſſible circumſtances, and until he can do that with ſome certainty, he has ſomething to learn.

Proceed-

Digitized by Google

Proceeding now immediately to the ſubject, it is certain that in colour-making, the operator either does, or ſhould, attend to certain proportions in mixing his drugs and other articles, according to the ſhades that are required, the quality of the cloth, and the articles uſed for ſightning or thickning, which when done, he generally thinks himſelf ſafe; as having acted at leaſt according to rule; or if he ſaw the pattern, according to the appearance of that; and if the colours were all worked by the ſame printer, and ſimilarly managed in every particular, the effect might be as required; but that is often far from being the caſe, as for inſtance, among innumerable circumſtances it might probably happen thus with a pattern that may have three reds and three purples; one printer may have the brown red, another the pale reds, and another the purples, as they ſucceed each other in the application; now the printer with the brown red may deem it needful to give it two or three ſmart blows with his maul, the next printer or grounder in putting in the other colours or ſhades deems it needful to hit the grounds but ſlightly, and perhaps the paleſt ſhade may go into another's hands, who may hardly hit it on the back

at

Digitized by Google

at all; while the purples may be treated in a direct contrary manner; therefore here it muſt ſeem that the ſecond red will not be impreſſed into the cloth like the firſt, nor the third like the ſecond; conſequently, the ſecond will be a degree paler than required, and the third two degrees; but, on the contrary, the ſecond purple will be a degree ſtronger than it ought to be, and the third two degrees, which will deſtroy the balance of ſhade, that ought to be preſerved. (Nothing is ſaid yet reſpecting the ſtate of ſieves, bruſhes, ſtowing, &c. as the bad ſtate of either muſt aggravate the caſe.) Hence it muſt ſeem, that whatever pains the Colour-maker took to proportion his ingredients, and to adapt them to the cloth, or the ſightning and thickning, the grounds have not been treated ſo as to produce the requiſite degrees of ſhade. (44)

Or, The matter may be thus illuſtrated: The outlines of two patterns may be nearly alike, but probably one may have a greater quantity, and larger bodies of pale reds than the other; and the other may have a ſuper proportion of the pale purple; or in one the ſhades, or other parts may be in ſmall bodies, ſo that wood only will

(44) See note 8 in copper-work where this circumſtance is illuſtrated.

Digitized by Google

will be ſufficient to work it, and in the other there may be bodies that require hatting, though the patterns in appearance may be of one claſs; now in this caſe, (45) if the Colour-maker ſee the patterns only, (46) it is a chance if he makes any difference in his proportions according to theſe circumſtances; for the flowers or other objects ſeeming to him to conſiſt of three regular ſhades of colour, either as reds or purples, the proportions for one pattern may be deemed needful for the other; but when the grounds go to work, they may receive different treatments from each other; hence the ſhade of colour that will be but barely deep enough for the purple or red ground that has large bodies, and which accordingly will be ſtrongly impreſſed on the cloth, by ſeveral blows with the maul, muſt be too weak for the red or purple of the other, that may be juſt ſtruck with the Printer's hand; or one ground, becauſe of the ſhades or fine lines, may be worked in paſte, while

(45) It is ſaid, "in this caſe," becauſe in others where two patterns differ very much in their appearance, it is very likely allowed for.

(46) It is not always that he even looks thus far, though if there be any weight in theſe ſuggeſtions, he ought to look at all the prints and grounds.

Digitized by Google

while the other may be worked in gum; the conſequence however will be, that though the two pieces have the outlines alike, yet the paler colours in the ſeparate pieces muſt be different in reſpect to the requiſite ſtrength of them.--- as obſerved in note 8 of copper-work.

Theſe obſervations may be brought ſtill cloſer, as for inſtance. Two pieces are to be printed with the ſame colour, but with different prints; one print fine and the other coarſe, or with ſolids in it; therefore very probably that with the ſolids will be more impreſſed in the cloth than the other, from its being deemed neceſſary to hit it more forcibly; hence though the colour for both pieces come the ſame from the colour-houſe, the effect may be different in the ſhade of the colour: and in printing doppies it ſometimes happens, that if a piece is not thoroughly dry, or if it be of a flimſy nature, the colour may be forced through, (47) while another more

(47) Here it might ſeem to many, that cloth being ſo thin, this is a matter of indifference, but when it is conſidered, that the aſtringent and colouring atoms are ſo ſmall, that a great number piled on each other would bear no proportion to the

Digitized by Google

more dry, or of a firmer texture, will reſiſt that circumſtance; therefore here again, though the ſame colour is uſed for both pieces, yet one will have a paler or more waſhy appearance than the other; and the moſt ignorant Printer knows, that if a ſhop be not kept warm, it is dangerous almoſt to work any colour; (ſee note 34) and that it is always beſt to finiſh a piece, though the colour may be uſed out of the ſame pan; a difference may ariſe too from colour being old or freſh; and to all theſe may be added the chance of ſome part being performed with foul bruſhes or ſieves, worked on hard blankets, or from coarſe ſieves, lying on very ſtiff gum or paſte; or ſome pieces may be worked with the firſt colour without

---

the thickneſs of the cloth (ſomething ſimilar to the microſcope diſcovering thouſands of animals in the breadth of an hair) it muſt then appear otherwiſe, and muſt accordingly be of ſome importance whether they are only on the ſuperfices of it, within the body, or whether they are forced quite through; in the firſt caſe the tinge can be but weak, in the ſecond it is likely to be more effective, but in the laſt the atoms muſt be too much diſperſed for procuring that cloſely connected body or maſs of colouring particles which is requiſite.

Digitized by Google

out being drawn over the ſtove; or perhaps taken to the copper without being properly ſtowed; while other pieces are treated in a direct contrary manner. (48)—See again note 34.

It is likewiſe of ſome conſideration, upon an optical principle (ſee rule 8 in putting-on, and 7. in cutting) whether pale colours are near to or encloſed with ſtrong bodies of dark colour, for what may appear of one hue, ſtanding by itſelf, or only near to, or encloſed with a fine line, will appear of another if otherwiſe circumſtanced.---See likewiſe note 37 in copper work. but in reſpect to ſhade, it will not appear ſo dark when ſurrounded by a maſs of dark colour, as when alone on a white ground, owing to the contraſt.

Theſe circumſtances, and more that might be adduced, are, it is preſumed, of conſequence enough to engage a Colour-maker's attention, for though on the ſuppoſition that he has proportioned his ingredients to the kind of cloth, the pattern, and the nature of the thickning, yet it muſt be evident that unleſs each colour or ſhade

(48) Some printers will, if they can, ſometimes ſmuggle as it were, pieces without being ſtowed, in order to have them ſtiff, though at times very improper ſo to do, as ſome calenders are not in very dry places, or the cloth itſelf may not be ſufficiently dry when taken to the calendar.

Digitized by Google

ſhade, is in its applications ſimilarly managed, according to the proportions given, its effects in the end muſt be different in a greater or leſs degree from what was intended.

As to the Printer, he generally regulates his blows or preſſure by the quantity or quality of colour, or whether his print or ground be hatted or not; but even here, ſome Printers dip and lay their prints ſo ſlowly, and hit ſo ſluggiſhly, to what others do, that even this circumſtance may aggravate the others, for there are ſome colours that dry very quickly; therefore (it is repeated) though one or two of the circumſtances juſt mentioned may poſſibly be of little conſequence, yet when all or moſtly all are joined, it then muſt be allowed by every one to be of ſome weight; as for the ſhare the Copperman has in this caſe, it depends on what manner the mixtures are imbibed by the cloth, ſuppoſing the preparation, &c. to have been properly executed, and the drugs, &c. proper;(49) for if, of a number

(49) This renders dyeing but a ſimple operation compared to callico printing, as in the management of the preparation, it is only relative to the different kinds of articles to be dyed, as intimated in the beginning of this ſection; hence it may be ſaid in Colour-makers language, that thicknings are more wanted than colouring articles.—See note 39.

Digitized by Google

ber of pieces boiled in the same copper, one colour comes up perfect, it is a proof he has done his part.—See note 8 in copper-work.

From what has been said, it seems that a Colour-maker should either be a Printer, or be able to put himself in a Printer's place, chiefly in respect to the printing apparatus being in order, and (as already said) likewise in the Copperman's, particularly in the preparation, (50)

(50) It has been mentioned to the credit of the first printing-house (in respect to the quantity of work done at it) in the vicinity of London, that the copper work is well attended; it is certain too that the same attention is bestowed on the printing, one of the Principals having been a Printer, and being able to command every convenience, it is of course the better for it; and Journeymen having a maxim (as mentioned in the section of printing) that a Printer only should overlook Printers, are perhaps more to be influenced by such a one; whether this is the case or not, certain it is, that much depends on the cleanliness of brushes, sieves and pans, especially when pale colours are used; indeed grounding

ſo as to have the chief circumſtances properly arranged, that may aid or attend the application of his mixtures; but at the ſame time it is granted, it muſt be an extraordinary attention indeed, that can nearly keep in view the almoſt infinite caſes under which colour may be applied, to ſay nothing of having to combat with indolence, ignorance, careleſsneſs, prejudice, or malevolence;(51) and ſometimes, though rarely, overzealouſneſs.

To

---

ing ſhould be done in a ſeparate ſhop, and the apparatus of courſe be by itſelf.

A remark is here ventured on, which if narrowly looked into, will be found not very wide from truth; that according to the branch a principal may have been brought up to, or moſt engaged in, that branch will moſtly engage his attention, and his aim for excellence will tend chiefly to it.

(51) It is repeated here (ſee note 33 in maddering) that white goods laying in a heap may receive an injury which may affect the printing; it therefore evinces the neceſſity of the proceſſes antecedent to printing being carefully attended; but for theſe as well as every other proceſs, to be done properly, is unhappily not in the power of all Printers; ſome will not have the conveniencies neceſſary

To lay down a plan to regulate these applications, would probably be spurned at by old practitioners; as it is hardly probable any that could

---

cessary, and some cannot have them, consequently when the means are obstructed, the execution must suffer. As to those who with such a complex business on their hands without either means or capacity, or who under the infatuated idea of being masters, have precipitated themselves into it without proper support, they are really to be pitied, for when raising supplies become so pressing, that (as in the memorable failure of Mosney-House dwelt on in another place) the business in the operative part is but a secondary concern, any one may judge how confusedly it must be prosecuted or discreditably terminated.

Remarks like these may appear invidious, but if they cause any who are inclined to commence callico printers to reflect sufficiently on the nature of the business, the writer is not apprehensive of meeting with censure for such freedom, being certain that he has done a real service.

He likewise cannot here forbear giving a hint of advice to the Printer, and he will add, that it is of consequence to a Draper to attend to it; for unless a Printer can evince his capability of executing work properly, the Draper has a chance of losing,

Digitized by Google

could be specified would be reconcileable to another's requisite mode of practice. It may however be suggested, that if a Colour-maker would arrange

---

as it is presumed to be more acceptable to have goods returned well executed, than to have to lay damages as some compensation for bad work; besides, a Draper should not only inform himself whether a printer can execute what he undertakes, but whether he can do it in proper time (chemical and general patterns are not here included.) A circumstance of this nature not being attended to, was the subversion (or at least forwarded it) of a considerable printing-ground at Old Ford (Lay and Adams) a few years back, the Principal having undertaken late in the Autumn, to execute for the Spring, a considerable number of very elaborate patterns; but though every nerve was strained, the effort was in vain, and as well as the Printer being overturned, the Draper must have suffered.

What helped to raise the names of Newton and Kilburn to such distinction, was in their outset being forward with their work, as well as excellent in general in the execution; and much was it regretted then, by the lovers of excellency, when the firm was dissolved; though the exertions and productions of each since that circumstance, have been still so respectable, that Calliço-printing in England

Digitized by Google

nearly repeating what has been ſaid.

arrange the different courſes of operation his colour has to go through, * in regard to the texture of the cloth, ſtate of the prints and grounds, blankets and ſieves, thickning, preſſure, &c. the operations might be reduced into ſome ſyſtem, beyond what is at preſent done, which is rarely more than proportioning the ingredients for fine or ſtout cloths, blotches, and fine prints and grounds; for certain it muſt be that according to the proportions or manner in which the iron liquor, allum, &c. is imbibed by the cloth, whether from

gland may be ſaid to owe its revival and preſent credit to their efforts; 2 or 3 other Printers are certainly entitled to commendation; but not ſtanding ſo forward in the articles of novelty and taſte in deſign, or brilliancy in execution, they are not particularly pointed to.

* Even in nearly the laſt proceſs, that of whitening printed goods, a careleſs Fieldman may render all that has been done abortive, eſpecially in ſtrong ſun-ſhiny weather attended with a drying wind, if goods are watered in patches, or ſuffer too long an interval between watering: the miſchief will be ſtill more obvious, if pale colour work, ſuch as lay-lock, bloſſom, or other pale blotch grounds, are thus treated—See the article Graſs Bleaching.

Digitized by Google

the manner of their being mixed, or their treatment in the printing ſhop, the colouring drugs can only impart their qualities towards giving the effect that is deſired.

The writer however preſuming that a Table ſomething like the oppoſite, with the proportions annexed to the different circumſtances under which colour may be conveyed, inſerted according to each Practitioner's mode, would often be uſeful, he has therefore offered one; leaving the blanks to be filled up according to each Operator's diſcretion, or courſe of practice; or it may ſerve as a kind of model at leaſt, for a better.

Adverting now to the inefficacy of written recipes for making either permanent or fugitive colours (as obſerved note 43, and in two or three other places) it is here ſuggeſted, that the moſt explicit modes of diſplaying them will never form a Colour-maker, as ſo many practical circumſtances occur, which there is no language to deſcribe, and for which experience alone can provide (52) (ſee note 4 of copper-work) but excluſive

(52). Such as the different kinds and qualities of cloth, the proportions, ſightnings, and thicknings of

Digitized by Google

nearly repeating what has been said, observed, that it would not be discloſing ſay, by way of recipé, that to make ur, take ſo much Iron liquor, ſo much uch flour, boil them ſo long, &c. or m, ſo much Sac. Sat. &c. for other co- the ſecrets are in a rigid attention to mſtances under which they may be d all theſe cannot be ſpecified in a it may be gathered from the above rained as it is, to ſay nothing of the petitions of it, how many circum- to be provided for, which experience tain, and which muſt evince the ab-

t too often regularity muſt ſtoop to ropriety to abſurdity; and judg- o downright ignorance ! ! ! Hence ſe of uncertainty.

he principal proceſſes of Callico- more fully exhibited further on.

Cutting,	Printing.	Stowing, Clearing,
Making,		Raiſing the Colour,
on,		Blue dipping, &c.
ring.		Fielding, Pencilling,
		After-courſes.

at home. Town Buſineſs, &c.

thinks an apparatus might eaſily be eping certain colours, while in the motion.

Digitized by Google

Digitized by Google

cluſive of all this, as every Printer is ſuppoſed to know the common routine of colour-making, and many will ſay, they know as much as can be known (ſee notes 4 and 10) it would be folly to attempt publiſhing recipes, unleſs every one excelled in ſome eſſential part, all that they or others knew; but where is the man who will pretend to diſplay ſuch? or even granting it were done, where is the Practitioner, who from motives of one kind or another, would allow it to be done, or ſtoop to adopt much of what might be diſplayed? hence, (as ſaid note 16 in copper-work, and at the cloſe of the ſame ſection) it is more prudent, and perhaps more uſeful, and, as it might injure thoſe who make a living by their poſſeſſion of recipes, it muſt be more conſiderate in another ſenſe, to ſpeak generally, rather than ſpecifically or poſitively in practical matters; and in diſcuſſing the theoretical part, recommend the ſtudy of it, or point to the means, rather than confidently offer to exhibit

---

of the colour requiſite for each; the mixing, boiling, application, &c. of them, in reſpect to time, quantity, quality and materials: the cuſtoms of particular places, caprice of Principals, obſtinacy or ignorance of thoſe who have to uſe them, &c. &c.

Digitized by Google

them; for to those so disposed to enquire, practical knowledge will be obtained much more perfectly than ever it can be gathered from books of any kind whatever: even what the writer has attempted to display on the applications of colour by printing, is little more than mentioning such circumstances, and leaving others to form conclusions; for practice and experience, it is again said, must suggest the most efficacious means of rendering such observations, or any others that can be made, useful in any respect; but this, it is apprehended, need not be further dwelt on here, as it is more than once intimated the slender efforts in this work, are with diffidence offered to induce certain practitioners to think, not arrogantly to direct any how to act. (53)

Respecting

(53) As illustrative of the above suggestions it may be observed, that works avowedly written for the benefit of Manufacturers or Artificers, often contain so much speculative and scientific matter, that such persons are rarely benefitted; as their ideas in general reaching little beyond practical concerns: this may be oweing to few Manufacturers or Artificers being writers, or having time to write, or perhaps from dreading the austerity of criticism; hence that employment rests more with writers by profession

Digitized by Google

Reſpecting chemical colours; there is a greater plea for withholding recipes, for granting (only for a moment) they could be improved, ſo as to equal thoſe brought up in madder, (and the field for diſcovery is very wide, and ſome are very ſanguine in this caſe) yet there are conſiderations that deſerve notice, which weigh againſt the univerſal adoption of ſuch a mode of printing, with all its boaſted advantages; for when once operations were ſo known, as to be performed in a ſhort time, with little trouble, and ſmall expence, numbers of indigent or deſperate adventurers would naturally ruſh into the buſineſs; and by their mutual underworking and underſelling efforts, Calliço-printing would ſoon loſe its reſpectability

---

profeſſion, and their diſcuſſions, as mere Theoriſts, are more apt to be philoſophically amuſive, than operatively uſeful; even thoſe great works, the French Encyclopediæ and Memoirs of the Academy, may be complained of on this ſcore (to ſay nothing of their high price preventing moſt Artificers from purchaſing them) the writer's not having been able to procure the neceſſary practical information, or if they procured it, they could not always explicitly and ſatisfactorily convey it to thoſe who were moſt intereſted in it, to whom it would be moſt uſeful, or who were moſt likely to render it uſeful to the world in general.

Digitized by Google

reſpectability; and (in the Draper's phraſe) prints in general becoming vulgar, and within the reach of thoſe who have but little to ſpare, other articles muſt be ſubſtituted more worth the notice of perſons of faſhion, or taſte.

Beſides, ſince moſt Drapers, by a certain criterion, know whether ſome kinds of work are faſt or not, there is a neceſſity for Printers to keep up, at leaſt, a line of reſpectable work; otherwiſe Drapers would naturally expect it executed for little, and then they among themſelves, would contend (by practices too common already) for the greateſt number of purchaſers, till prints, conſidered in this light, likewiſe become of little value; and it needs hardly be ſaid that with Drapers, retailers particularly, that work is deemed the beſt which brings returns the ſooneſt, however ſmall the profit.

It may be added, that by the adoption of an univerſal chymic mode, a national or commercial injury would be experienced; by many articles, now in uſe for procuring faſt colours, being no longer wanted; which includes the loſs of employment thouſands muſt ſuſtain, whoſe living depends on the cultivating, manufacturing, and the conveying of ſuch articles from

Digitized by Google

from place to place; but mechanical or other improvements neceſſarily ſuperſede theſe conſiderations. Though after ſaying thus much, it muſt be added, that, until every Printer thinks it no way diſcreditable to be deemed a chemick Printer, or every Draper cares as little about his ſhare of repute in vending chemick work, permanent printing on the preſent eſtabliſhment muſt retain its ſtaple value.

Purſuing this ſubject a little laterally, it may be obſerved to chemick Colour-makers, who make a parade about this or that colour or ſhade, that ſuch matters rarely give a turn to a ſtile of work; figures or ſhapes being more the eſſential parts, and a mere chemic ſtile of work performed on any material, every one knows, has but its day.

Thus in chemick printing, as far as the writer's memory reaches, Arbuthnot made ſome ſtir with green ſtalks in light chintz, which ſoon flew, and no proviſion being made to ſupply the vacant parts (ſee the latter part of the ſection on pattern drawing,) the cloth then had a truly ludicrous appearance; the flowers ſeeming ſcattered here and there without ſtalks or any other appendage. Preſton's chemical courſe on various materials, a few years afterwards, made ſome noiſe,

Digitized by Google

but an idea prevailing, however unjuſtly, that it was by oil colours, and that the heat of a fire ſide would deſtroy them, that courſe ſoon dropped. Flet's came next, but his ſtile as well as Preſton's was very confined and ſhortly ſubſided: black and orange, or (as commonly called) gold colours and other coloured ſhawls, came next in vogue; ſaid to be Naylor's invention; other fancies, ſuch as ſpringeing or ſplaſhing, ſoufflee, &c. might be added; with the blue and buff lately much in requeſt, and laſtly the kerſymere waiſtcoat ſhapes, but none of theſe ever ſtood the proofs of a properly faſt colour; as to the blue and gold, or black and orange, continued to this time, and even introduced into furniture, (and which as well as the black dove and yellow ſtile, from the eaſe and facility of its execution drew many unto the buſineſs, that perhaps now wiſh they could elegibly quit it) as proving what has been juſt ſaid, it has decreaſed from twelve-pence and more per yard for printing, down to three halfpence, or even five farthings!!!(54) and probably black, dove and yellow

(54) It is notorious that in many commiſſioned and other ſhops, the loweſt chemical work, even with

yellow would have experienced a fate ſomething ſimilar, but neatneſs and fulneſs were generally required, and reſpectable Printers did a deal of the work.

In ſhort, as theſe courſes are little to the credit of callico printing, it prompts a ſuggeſtion, that to reſtrain them within proper bounds, it would ultimately be of general ſervice if ſome ſuch regulations were eſtabliſhed as are in France concerning Dyers; thoſe who dye faſt colours and thoſe

---

with ſuch colour as almoſt, literally ſpeaking, would ſhake off, is warranted and ticketed as faſt, and often called chintz; and as one conſequence certainly is cauſing purchaſers to be doubtful of all kinds of work, it would here unheſitatingly be ſhewn how to know at ſight which is ſo, if it could be done perſpicuouſly; as to ſaying that cheap ticketed work is ſuſpicious, is what every one knows; and when little more is given, whether through neceſſity or choice, than what the cloth is worth, no one can reaſonably complain; but very often a high price is required, and freely given in expectation of adequate work; In ſome caſes it muſt be however allowed the impoſition reſts not with the Draper.

Digitized by Google

thoſe who do not, being deemed of diſtinct profeſſions, and faſt and fugitive colours confined to certain kinds of cloth.---See in the general reflections more to this purpoſe, as well as the means of improving Calfico-printing.

End of the Section on Copper work and Colour-making.

Digitized by Google

Enlargements on the preceding ſubject, being a more chymical diſcuſſion of it; or, in which the agency of chymiſtry is more exemplified, both theoretically and practically.

HAVING attempted to give a general view of preparing and colouring proceſſes, as accommodatory to the ſtate of philoſophical knowledge among thoſe to whom the work is addreſſed, as perhaps can be done, the writer now, in order to lead them as it were ſtep by ſtep to the point he wiſhes them to attain, will endeavour to be a little more ſcientific, and ſpeak more particularly of the operations of nature in thoſe proceſſes, in view of rendering them uſeful or ſubſervient to the operations of art. And, as failures in practice are as much owing to improper qualities in the articles employed, as well as in the unions and applications of them, he will ſubjoin ſome certain modes of analyzing them, partly from experience and partly from reſpectable printed documents: but ſtill expreſſing himſelf in as familiar terms and language

Digitized by Google

as he poſſibly can:---as what he has ſaid reſpecting coppermen (note 34 to maddering) may be ſaid reſpecting the maſs of colour-makers (he ſpeaks here from certainty and dares refutation) for being little ſolicitous about principles or cauſes, and little acquainted with the proper names of articles which they uſe, the modes of analyzing them, or the true ſignification of chymical terms in general, it probably would be of little advantage, nay it would appear like vanity and affectation, to uſe the new terms of chymiſtry (55) expatiate on new theories, or diſplay certain new opinions, or even facts, though relative to the ſubject. (56)

The

---

(55) Called the new nomenclature, which at a proper time is intended to be given with new opinions, experiments, &c. included in what is intimated note 7 to preliminary ſuggeſtions.

* Among abſurd phraſes in general uſe, are killing acids, opening indigo, verdigreaſe, and the like. The abuſe of the term colour has been mentioned,—ſee note 1.

(56) And has given ſo ſlight and imperfect a compendium of chymiſtry as to omit ſome of the metallic

Digitized by Google

The time however he truſts is haſtening when philoſophical principles will be cultivated (57) the neceſſity of it becoming every day more evident. He will even venture to ſay, when this crude treatiſe is ſcanned, and he has ſufficient reaſon to ſuppoſe it will be by many in the profeſſion, however cavalierly he treats them, that a deſire for better information will commence, and, of courſe, an endeavour to obtain that knowledge which is the proper baſis of practice, and which as ſuch is ſo often ſpoken of in this work.

---

metallic ſubſtances, moſt of the acids, and intirely the gaſſes, though important primary agents in the new chymiſtry.

To thoſe who have leaſt ſpare time, are recommended as a ſelection of works on chymiſtry, firſt Nicholſons Elements, then Fourcroy's and Lavoiſier's, but chiefly Berthollet's Memoirs, of which the writer has often availed himſelf in this work.

(57) Probably the preſent diſtracted ſtate (1790) of France, may cauſe ſome of her ſcientific artiſts to migrate; of courſe, where they go, they will carry ſcience with them, and callico printing in this country may be bettered by it.

Digitized by Google

Concerning permanent BLACK and PURPLE.

Iron-liquor, or calx of iron diſſolved in vinegar, from whatever liquor procured, is the agent for obtaining permanent black from madder; and by judicious tempering with water forms purples and laylocks;* the black itſelf being only a deep purple:---With logwood a leſs permanent black or purple, of a bluiſh duſkier hue is obtainable. With weld and other yellow colouring ſubſtances, the hue is brown. When added to the red colour, or more properly the aluminous ſolution, then chocolate, pompadour, bloſſom &c. are formed in the madder copper, according to the proportions of mixture, from the colouring matter being taken in combination by both the calx of iron and the earth of alum at the ſame time.

Some think the additament of alder bark, or decoctions of other aſtringents might help the iron liquor in certain caſes, as when newly prepared or procured by a weak acid.

Of the tar acid iron liquor, or the chalybeat one, the writer will ſay little; the expedition of procuring either may have its advantages, but much

* Uſing paſte or gum occaſionally as thickenings, or vehicles for carrying them to the cloth.

Digitized by Google

much caution is needful before a courſe of work is attempted with them, unleſs the manufacturers are of undeniable repute: for though a deal may be ſaid of the acid employed and of its immediate operation on the previouſly prepared calx, yet every printer, as already obſerved, is fully ſenſible of the value of good old iron liquor, and of courſe preſerves it for particular purpoſes.

As to what is ſaid by ſome of the acid procured from cyder, perry, &c. and uſing ſteel filings, it ſtill is but vinegar, and the ſteel muſt be converted into a calx before a drop of iron liquor can be formed. Hence the only ſuperiority it can boaſt over any other, is in its being freer in its firſt ſtages of manufacturing from uſeleſs or injurious matters; and from the iron being very minutely divided, and, of courſe, preſenting more ſurfaces to the action of the acid, the ſolution is more expeditiouſly performed.

It may not be irrelavent to add, that the more concentrated the vinegar, or the nearer it approaches to diſtilled or radical vinegar (58) it

(58) Vinegar diſtilled from verdigreaſe; but to ſpeak of this as well as other articles, new terms of

may be proportionably effective, both in reſpect to power and expedition: and ſmall beer or weak wines are known to give of little power. As to the age of common iron liquor, that is, ſuch as is procured in the old way, it is indiſputable that the particles of iron or its calx are found to cauſe a finer colour and of being more uniformly diſperſed, however lowered the mixture may be, than in the new iron liquors. In fact, it is this perfect ſaturation, and the eaſe is applicable to aluminous and other ſolutions, that denotes its excellency. And this is no where more evident (as well as with the red colour) than in the charging of copper-plates, where the engraving is very fine: for it is certain that the colour made at different grounds by different operators, will not ſuit the ſame engraving. Other circumſtances to be ſure may intervene, yet the above

---

of doctrine muſt be uſed, at preſent deemed incompatible

* As vinegar diſſolves iron ſlowly, and only then with acceſs of air, the tar acid, or more properly the acid of wood, has been lately much uſed and extolled, being applied immediately to the calx.

Digitized by Google

above is certainly one worth attending to (59) But in this inſtance it may be ſaid in one caſe, that, by the particles of iron being more ſaturated with the liquor, and in the other by the earth of allum being completely ſaturated with the vinegar, of courſe, both the calx of iron and the earth of allum are carried with their ſolvents into the fineſt interſtices.

N. B. With blue colour for copper-plate printing the difficulty is greateſt: hence the colour here cannot be too pure and free from adventitious matters, not only for filling the interſtices, but alſo for the ſake of the doctor or clearer.

Perhaps what tearers call vittry colour, or that which in boiling, or other ſtages of preparing black, appears frothy, ſcummy, lumpy, &c. is from the iron liquor not being free from plumbago (which is a combination of the baſe of fixed

(59) The perfect digeſtion of galls and other aſtringents; or their ſaturation with their ſolvents, is as fully needful in certain courſes; for in both caſes, the extreme diviſion of the particles produces the beſt effects.

Digitized by Google

fixed air or pure charcoal with iron. Of which much might be ſaid, but for reaſons juſt given, it is waved at preſent, except that being black lead, it is inſoluble in acids.

In the copper a decompoſition of the liquor takes place either by attriction (note 28) or by an attraction of the colouring matter of the madder, or elſe by an attraction of the cloth itſelf (60) to the calx held in union by the vinegar: which in this caſe is ſimilar to the earth of allum in combination with vinegar.

The writer will not yet pretend to ſay how the foxing of the purples (a common phraſe) may be avoided with little trouble, but he obſerves as it is ſure to take place if the water be heated to a certain degree, it renders the purple an iron mould, or a metallic ſtain; the combuſtion having decompoſed it, and ſeperated the colouring matter from it. For here be it obſerved that the purple on the cloth is a compound matter, formed

(60) The lateſt modern opinion is that the cloth itſelf in the copper undergoes a partial ſolution.

Digitized by Google

formed of the calx of iron and the colouring matter of the madder.

Why the red is not ſo eaſily decompoſed is from the cloſer attraction of the colouring matter of the madder with the earth of allum: and it has been obſerved, the black and conſequently the purple is deemed only a depoſition of the calx; beſides, as a proof of it, it is known that the deeper the purple, the eaſier it is affected, which only ſeems ſo from there being more ſubſtance to be acted on.

In maddering if the heat be too intenſe, a ſimilar circumſtance happens, that is, a browneſs enſues, ſo likewiſe does it in mere welding; only in the firſt caſe the colouring ſubſtance already on the cloth is changed, but here the colouring matter of the weld in the copper is changed, combuſtion being the cauſe of both.

Note. An iron liquor, not generally known, is obtainable from a decoction of rice in which red hot iron is thrown; it is then to be added to a certain quantity of vinegar in which red hot iron has likewiſe been thrown.

Concerning

Digitized by Google

Concerning permanent RED.

Allum, (that is, vitriolic acid and clay,) being mixed in ſolution with ſugar of lead, (which is compoſed of vinegar and calx of lead,) a decompoſition or change of union takes place according to the laws of affinity; the vinegar leaving the calx of lead to join with the clay, or more properly the earth of allum; while the vitriolic acid leaves the earth of allum to unite with the calx, forming with it an inſoluble and uſeleſs mixture (61) conſequently what remains, as uſeful, is the vinegar in union with the earth of allum (according to vulgar obſervation and language, ſugar of lead prevents the ſettling which would otherwiſe take place too ſuddenly) but in this mixture there being more acid than neceſſary, expreſſed in chymiſtry by the terms either of exceſs of acid, or a ſuperſaturation of acid, chalk being added, takes hold of it: the chalk at the ſame time undergoing a decompoſition (by the vinegar expelling the fixed air) (62) the effervеſcence which commences, evincing this operation.

Whether

---

(61) Thus, it is common for the colour at the bottom of the tub to be unfit for uſe. ſee ſomething ſimilar in Exp. 6 in note 40

Digitized by Google

Whether the neceſſity of this additament was diſcovered a priori, or by chance, or experiment, is no matter; it is certain that without it the colour is not ſo deep. For according to the common mode of proportions, without the uſe of chalk, there is a uſeleſs ſubſtance remaining, increaſing the bulk of the liquor without adding to its efficacy. (note 61) An alkali being added tends likewiſe to take up the exceſs of acid, hence ſome uſe aſh in the red colour.(63)

The reſult, however, being now vinegar and the earth of allum, neceſſarily diluted; when it goes

(62) Chalk is lime ſaturated with fixed air, or æriał acid. Lime is chalk deprived of it.

In this caſe the ſtronger acid, that is, the vinegar, expels the weaker, that is, the fixed air, and takes its place, according to the 5th rule of affinities in the compendium.

(63) If waters were carefully analyzed before being uſed, ſome would be found fit for black, though unfit for red, and ſo of other colours; in truth, few are aware of the conſequences of an indiſcriminate uſe of hard or ſoft water; in ſhort, it will render the proportions or articles neceſſary at one ground, perhaps uſeleſs at another.—ſee article preceding aſhing and note 37 to maddering.

Digitized by Google

goes into the madder copper, the union between the colouring matter of the madder and the earth of allum (which forms what is often ſpoken of in this work as a cement) is eaſier affected than if with only a mere ſolution of allum.—Here be it obſerved, a ſecond decompoſition takes place, that is, of the vinegar and earth of allum, by the interpoſition of the third ſubſtance, namely, the colouring matter of the madder or weld, as either is uſed.

The vinegar is likewiſe found to agree better with the thickening than a mere ſolution of allum will, it being in tearers language, not ſo vittry, lumpy or ſpecky; perhaps from not being ſo cryſtalizable.

In making red colour (64) various other articles, ſuch as ammoniac, corroſive ſublimate, tartar, calx of tin; arſenic, zinc, &c. are or have been occaſionally added. When arſenic is uſed, there certainly ſhould be aſh added: Reſpectable colour-makers are however very ſparing in the uſe of theſe articles (note 39.)

It

(64) The reader is again reminded colour here is a very improper term.

Digitized by Google

It is unneceſſary (and in fact for reaſons juſt added, not intended) to enter into a detail of their immediate effects, or the cauſes of them; their chief effects as ſaid already, being as alteratives, (65) but they are neceſſarily ſpoken of here again.

It is, however, juſt intimated that tartar in its union with allum, does not act like ſugar of lead: there is not a mutual decompoſition, though they attract each other; the attraction is nevertheleſs deſtroyed in the copper, and a decompoſition then enſues of the previous mixture, followed by a union of the colouring matter with part of it.

Calx of tin, ammoniac, &c. in their effects of brightening (as uſually called) are efficacious in conſequence of preventing that cloſe attraction of the madder, weld, &c. to the allum, &c.—Tartar uſed for yellow has this brightening effect in a particular degree; it likewiſe brightens chymical colours, ſuch as ſolution of cochneal,

(65) Their attractions to the principal ſubſtance or baſis of the colour is to be known by ſtudying the laws of affinities.

Digitized by Google

brazil, &c. and in printing kerſeymeres and other animal ſubjects this ſalt is very uſeful. Urine in ſome caſes ſtrengthens the colour; corroſive ſublimate tends to deepen it, but like as with tartar, alh ſhould be uſed with it. Common experience will ſhew the effect of other ſubſtances, though now few of them are uſed in callico printing, as juſt obſerved. (66)

It is not to a vegetable ſubſtance that the attraction of the earth of alum is confined, it acts readily on animal ſubſtances, as in the inſtance of lakes (ſee note 33) here the alkali ſeizing the ſubſtance ſuſpended in the ſolvent till then, is thrown down. In printing on woollen this circumſtance is very manifeſt: hence it may here be ſaid, that as in dyeing, a ſolution of iſinglaſs, or of glue, added to the decoction of the vegetable ſubſtance, helps the effects by its attraction to calces, which otherwiſe would not be attracted

(66) Some colourmakers nevertheleſs affect to be wonderfully ſecret in uſe of ſome of theſe. The writer knows of a great ſum being given not far from London, for a receipe for red, becauſe calx of tin was an ingredient.—ſee notes 35 and 79.

Digitized by Google

tracted by the colouring ſubſtances. (67)---(See calces further on.)

In want of ſugar of lead, it may eaſily be procured by diſſolving any of its calces, ceruſſe excepted, in vinegar.

Concerning YELLOW, &c.

The ſolutions of allum, ſugar of lead, and tartar united, is the agent for procuring yellow from weld; tartar is however not now much uſed. The natural operation here being ſimilar to that of maddering, excepting the colouring matter being yellow inſtead of red. (68) Various articles are ſometimes uſed as ſubſtitutes, but none excels it. The New-England oak

(67) The uſefulneſs of dung, as an animal ſubſtance, helps the colouring proceſs in callico printing.—See dunging.

(68) The action of allum and lime on the colouring ſubſtances is ſimilar to that of lime or alkalies on indigo.—See further on.

If allum be boiled in a copper veſſel, the liquor will be impregnated with copper, which vol. alk will detect.

Digitized by Google

bark, uſed by many in Lancaſhire may however be mentioned as the beſt.

A weed called by ſome Ladies Bed-Straw (ſee the ſheet with the table for proportions) has had a little undeſerved repute for bringing up ſeveral colours at once: it may nevertheleſs ſerve as a ſubſtitute for weld. The root gives a red.—Several fields near Bow in Middleſex are appropriated for the cultivation of this plant.

The varieties of drabs, teas, clays, dull-greens, &c. are eaſily procured by varying the proportions of ſumach, fuſtick, &c. as already ſtated.

An orange or ſnuff-colour, is procurable by not letting the maddering come up to a ſcald, ſo that the red is barely produced, and then welding it. It may be ſubjoined, that a repetition of maddering or welding by adding various ſalts or calces to what remains, will produce various effects. Variegated effects are likewiſe to be produced by welding firſt, then printing an after-courſe and maddering it: but theſe, however, are only tricks to be purſued with moderation.(69)

It

(69) Such practices helped to forward the failure of Liveſy and Co.—See further on, note 80

Digitized by Google

It has been obſerved (ſee note 30, maddering) that a philoſophical mind might come near to ſome proper criterion for aſcertaining the quantity of madder, &c. merely requiſite in all caſes. The hint there given may poſſibly be improved by the practice of dyeing, where the weight of the ſtuff that is to be dyed, regulates the weight or meaſure of the articles that procure the dye. There are however great obſtacles to ſuch aſcertainment in Callico-printing: but, if only for experiment ſake, cloth might be weighed before and after being printed, and the difference in weight acquired by printing, made to regulate the quantity of madder, weld, &c. taking into account the dry and wet ſtate of the cloth, the thickening, &c. But, at any rate, the ſuper-quantity of the colouring articles might, by certain proceſſes, be ſeperated from whatever elſe that may neceſſarily be left in the copper of the thickening, ſightening, &c. and the madder, weld, &c. not taken up, be ſeparated in a pure ſtate (this at a future time will probably be ſpecified, though deemed needleſs now, as the agency of chymiſtry muſt be brought in, in a rather particular and operoſe manner. The writer is aware, and has mentioned, (ſee maddering) that, in common, this ſuper-quantity is made uſe of for inferior purpoſes; and even in the colouring houſe in making yel-

Digitized by Google

low, &c. but ſomething like what is hinted as above, would be of much better advantage.

Concerning BLUE.

The chief, and, perhaps, only proper agent in the production of this colour is indigo; as woad, pruſſian blue (70) logwood and ſome other ſubſtances, have hitherto not anſwered not anſwered the hopes of any. Woad however is the cloſeſt of kin to indigo; in fact, indigo is obtainable from it.(71)

The

(70) Pruſſian blue is iron, in combination with pruſſic acid, which acid has precipitated it from its ſolution. The acid is prepared by calcining animal matters (generally oxes blood) with alkali. The common ſolution of Pruſſian blue is by ſolution of tin or marine acid; ſomething of which kind was lately hawked among London printers as a blue to print with, and called the true Switzerland blue. But the whole proved rather an abortion,—See further on, reſpecting metallic calces and precipitates.

(71) By the agency of lime, or by adding pure alkali to the woad, when fermented with water.

Digitized by Google

The common ſolution of indigo, or opening of it, as uſually termed, it has been ſaid is with aſh, lime, orpiment (72) and concentrated vitriolic acid: but, it is here further obſerved, that indigo, in order to be diſſolved, muſt be de-

(72) Forming a liver of ſulphur, which is the true ſolvent.—Livers or hepars being combinations of ſulphur, with alkalies and earths, and the orpiment here which is decompoſed, in the courſe of the proceſſes, contains ſulphur.

The properties of indigo are ſuch, that nature ſeems to have ſet a barrier to any attempt to uſe it like many other articles, when it is formed into the pencilling blue colour; (china blue colour being governed by other proceſſes) ſo as only to require rincing, with all the ingenious contrivances of wired ſieves, agitators &c. either in procuring fine lines, or evenneſs of colour, when the ſhapes are large and frequent (note 39) for as partly obſerved, note 37, till we can either diſplace or deaden the attractive powers of a component part of the atmoſphere, or elſe chain down, as it were, the volatility of a principle in the indigo, we muſt deſpair of having it in ſubjection. The new doctrine, however, of gaſſes, is at preſent employed with ſtrong hopes of uſing it, at leaſt, to more advantage than hitherto.

Digitized by Google

compoſed, and a ſubſtance which it has acquired, which ſee below, be expelled. Woad, in which putrefaction has commenced, affects this, and at the ſame time gives a blue. The appearance that indigo exhibits (note 37) in ſolution, is its becoming green, or ſhewing a green ſurface with lime, alkali or certain calces: The colouring matter here evidently flies off, and until that takes place it is inſoluble. (*) The copperas and orpiment are ſuppoſed to do this from certain powers of affinity or attraction.

The beſt methods for forming blue vats, accord- to the moſt reſpectable French chymiſts and dyers, are 1ſt, By macerating the indigo in a ſtrong ley, then grinding it, adding lime and water to it, raking it when the lime is ſlacked, and then adding green copperas or orpiment.--- After this, the indigo (previouſly ground) is to be added, raked and then ſuffered to reſt as uſual. 2nd, method, being more ſimple, is by adding certain proportions of indigo, green copperas, lime and water, and this compoſition, after raking, is fit for dyeing in a few hours.

In theſe and all other proceſſes in which lime and water are uſed, the lime muſt not be too chalky

* Vital air, which the indigo acquires during combuſtion, according to the new theory.—See Berthollet's memoirs.

Digitized by Google

chalky (73) nor the copperas too calcined, and the lime ſhould always exceed; or the ſolution of the indigo will be the more imperfect; neither neither ſhould it be in uſe but a few days, as it then gets weak.

Immerſing the cloth afterwards in diluted vitriolic acid heightens the colour; it is generally immerſed twice, the firſt time being called roughing, but this commonly hurts madder colours, hence chiefly uſed with china blue colours only, and theſe when dull may be mended by further immerſions. †

To make this blue, ſome make a ſolution of antimony firſt, and add indigo afterwards. A dry preparation in theſe proceſſes as well as in others is to be procured from indigo.

The curious may ſublime indigo, and thereby procure flowers as with zinc, ſulphur, &c. For

(73) Which will unavoidably be the caſe if kept too much expoſed to the air, by attraction of the fixed air* from the atmoſphere, chalk being lime ſaturated with fixed air, which when impelled by fire, or a ſtronger acid than the fixed air is, is extricated; but which the time afterwards, endeavours to regain. But this attraction if fixed is moſt manifeſt in lime water, and every one knows time gets moiſt ſoon in the air, eſpecially if the air itſelf be moiſt.

* *Which is a weak acid.*

† A blowing day is bad for drying the cloth, as it is apt to ſmudge; but when the blue is once fixed, it is not eaſily moved.

Digitized by Google

experiments in a ſmall ſcaleit may be done in a common flaſk over a common fire, defending the flaſk from the contact of the fire.

To ſpeak of the Saxon blue is hardly worth while, it is ſo very fugitive, being a mere ſolution (if it can be called ſuch) of indigo in vitriolic acid. If this, however, be added to a proper ſolution of indigo, a green may be procured; and if the acid be rather predominant, it increaſes the intenſity.

In blue dipping, if the cloth appear clean and white, as in other caſes mentioned under the ſection of copperwork, the preparation is generally diſpenſed with, on a preſumption the cloth has no oilineſs in it; but this does not always ſeem to be the caſe, and the writer cannot think ſubordinate blue dippers, printers, and cylinder workers, are always in fault, when ſtormont and other cloſe work appears uneven. And he knows, that faults are fewer where preparation is more indiſcriminate. Even for common chemical work, it may be more needful than perhaps many think; for it is certain, that if the aſhing be not properly or ſufficiently performed, the cloth will turn brown in time: and this, by the way, may account for the brownneſs that is obſerved to take place in cloth where

Digitized by Google

where chemical colours are brought up in lime water, unleſs it be ſuppoſed that the lime may depoſit ſome of its earth, or ſome ſubſtance that may be in union with it, (as lime itſelf is earth) which in time cauſes that brownneſs. In this caſe, how far an immerſion in ſome acid may diſlodge it the writer will not ſay, but the acetous acid ſeems moſt proper: as to the vitriolic that muſt unavoidably form a ſelenite. (74)

In making paſte colour (75) in order to preſerve certain ſhapes in white on a blue ground;

(74) A deſideratum in chin a blue, printing exbiting it, with deep and pale ſhades along with madder colours, without paſting or otherwiſe preſerving it. It is however to be done by certain preſervatives, though not by common paſte; and even a ſtrong blue to be formed by certain prepared vats, ſo as not to hurt the madder colours; and it is well known, the writer a few years ago drew patterns with two blues intermixed with chintz work (the houſe of Aſhby and Philpot had the firſt) but it was deemed impracticable; he however hopes thinks it will not long be deemed ſo.

(75) A compoſition of tobacco pipe clay, and ſoft ſoap.

Digitized by Google

waters impregnated with ſelenite or other earthy matters, are detrimental. (76) However, in any caſe where the ſoap is decompoſed, the paſte does not work freely. Inſtead of tallow to which it is requiſite to keep a heat continually applied; ſome of the fat oils; butter of cocoa, &c. might probably be uſed to advantage. In wax printing the wax is neceſſarily kept fluid over burning charcoal.

Lemon-juice being made uſe of in ſome caſes to procure ſimilar effects, by diſcharging the colour, it is intimated here how to procure it.

Expreſs

---

(76) If vitriol of lime or magneſia be in water, the vitriol unites with the alkali, and the lime or magneſia with the oil, forming an almoſt inſoluble ſoap, floating on the water having the appearance of a curd: hence here cannot be a perfect ſolution of the ſoap.

*** A ſolution of ſoap being poured on a metallic ſolution, its acid ſeizes the alkali of the ſoap.

Fat oils and bitumen make a fat varniſh. By combining fat oils with calces of lead, adding a quantity of water and evaporating the liquor, a thick ſyrup is obtained which does not cryſtalize

Digitized by Google

Expreſs the juice of lemons, of any ſort, ripe or unripe; expoſe it to the ſun till it depoſits a ſediment, filter it till the liquor is clear and ſet it in a ſand bath; change the receiver when the drops are acid: The acid preſerved in the receiver, is to be kept in veſſels ſecured from the air; Or, ſaturate the lemon-juice with lime, waſh it and pour it on a due quantity of vitriolic acid; the liquor poured from the precipitate is the acid of lemons.---*Lavoiſier's Chymiſtry.*

The beſt lime is that what effervesces the leaſt with vinegar, (77) or which mixes quickly with water, and with the greateſt heat.

To get the pureſt lime (though not ſo abſolutely needful in the above-mentioned proceſſes) is by boiling powdered chalk repeatedly, diſſolving it in radical vinegar, and precipitating it by concrete ammoniac. For pencilling blue, pure lime is, however, indiſpenſably needful; in fact, in all the ſolutions of indigo where it is uſed, as is the lime ſo will be the colour.

Lime

(77) Being moſt deprived of its fixed air (ſee note 73) and conſequently there can be little effervescence.

Digitized by Google

Lime water when uſed to bring up the colour, whether bright green, buff, chemick blue, &c. produces the effect by decompoſing the mixture applied to the cloth: the acid that held the articles in union being ſeparated from it, and the remainder left on the cloth.

From the preceding ſuggeſtions it is inferred, that good black and purple colour is only to be procured from well ſaturated iron liquor: good red, and yellow from pure vinegar and earth of allum; and good blue by the ſolution of indigo with pure lime, aſh, &c. but to enter here into a deſcription of the teſts and analyzation of theſe mixtures would be too complex and prolix, and for reaſons given, it would be almoſt uſeleſs, for it comprizes an analyſis of every article that is uſed both in its ſimple ſtate and when combined with any other ſubſtance. It is, however, certain that no man can properly be deemed a colour maker unleſs he can do it, if only reſpecting the common application of them, ſaying nothing of thoſe accidents that often confound the beſt colour makers that we have.

Of

Digitized by Google

Of CHEMICKS. (78)

Metallic calces, precipitates, and certain ſubſtances held in ſolution by acids, are here the common agents. Calces in general have more attraction for, or, perhaps, rather are more attracted by animal or woollen ſubſtances (79) than vegetable, viz.

---

(78) The reader is reminded, proportions are intentionally with-held, but particularly in chemical proceſſes; note to prel. ſug. for beſides the reaſons given, he will add here, that thoſe recipes which he has procured, contradict each other. He however would willingly give information of certain venders of them and whoſe indigence it would even relieve.

(79) Bright colours on Kerſeymere, and other woolen matters, are not the beſt on the ſcore of permanency. (note) Brightners however are eaſily obtained, as ſaid elſewhere.

A great ſum (as before intimated) was given for a recipe for red, (at Nixon's, the writer thinks) becauſe calx of tin was an ingredient, which acts as one of theſe brightners.

The writer knows of a firſt attempt to print hammer cloths, fabricated with a mixture of animal and vegetable

Digitized by Google

viz. linen, cotton and the like (calces of iron excepted) particularly if saturated with an alkali, from their affinity to them, as they leave the acid in which they are suspended, being at length thrown down, (note 33) Or it may be said, the solution of any metallic substance in an acid, produces the desired effect, by the substance it is applied to, having a power of decomposing it and joining the colouring part; therefore it may be observed the most likely circumstance in favour of forming chemical colours is the solution quitting its acid readily.

Where calces can be introduced along with the solvent, so as to form an union, it must be in consequence of the article intended to be coloured, having attraction for the calces; and hence the great advantage of woollen printing, as animal substances

---

vegetable matters; but the difference of the substances not being provided for, the endeavour failed (note 26 and 41) An ingenious artist (Naylor) has however done beautiful work on these articles, knowing how to provide for the mixture; as well as he has operated on the linings of carriages &c. and he now has deservedly the countenance of several of rank and fashion.

Digitized by Google

ſubſtances have ſtronger affinity to calces than vegetable. As to the circumſtance of iron-liquor cauſing a black as ſuppoſed by a depoſition of its particles. (note 28) the new idea of a partial ſolution of the cloth may be brought in to aid the operation.

The calces of gold, ſilver and mercury cauſe too much combuſtion to be rendered of proper ſubſerviency; or in other words, their tendency to affect too ſtrongly the articles to which they are applied; while copper, lead, or biſmuth approach the other extreme.

Many calces give a purple; Godfrey among his attempts has made ſeveral fine ones, note 4 to Prel. Sug. Ilet had one before the ſociety for the encouragement of arts; but without undervaluing the labours of any, and Godfrey's reſpectability as a chymiſt is well known, as well as the profeſſional practice of Ilet, and others, unfortunately moſt chemical colours, unleſs they contain within themſelves a proper buoyant, a buoyant or thickning is with difficulty incorporated with them, (note 49) and to temper them like aluminous and other ſolutions, deſtroys moſt of them at once, by the water taking hold of the ſolvent. Even the brilliancy makes them

Digitized by Google

them ſuſpected. Another thing is the articles and proceſſes being too expenſive. Further, among attempts of this nature, from the power of the menſtruum, not only an early injury will happen to the cloth, but a chance of the very prints being deſtroyed.(80) Hence ſolutions of animal and vegetable ſubſtances ſeem better calculated for ſervice in general, but particularly for cloth of vegetable fabric.

Various acids (81) will form many precipitates from brazil, but with ſolutions of tin the moſt general

(80) Among the cauſes of the failure of Liveſy and Co. may be included the irregularity and confuſion Hall occaſioned, as intimated elſewhere.

Brazil ſteeped in certain acids gives out a colour, which precipitated by an alkali, is a lake or inferior carmine

(81) Nitrous acid by its fumes, commonly called ſteaming, gives a dye to ſilk, which when dipped in an alkaline ſolution, is rendered orange; ſome other acids have ſimilar power.

The fuming of dilute nitrous acid, is ſometimes cauſed by its containing iron; which of courſe it much

Digitized by Google

general effects are obtained, and the moſt powerful is the ſolution in aquæ regiæ; on the goodneſs of which much however depends.

Among the effects thus produced, are,

1ſt, Red from cochineal:---The hue to be varied with tartar, ſal ammoniac and other ſalts, [note 41) From ſafflower effects are likewiſe obtainable. Archil in this ſolution has likewiſe conſiderable effect, Among calces, biſmuth may be uſed to advantage. On woollen, as before obſerved, moſt of the calces may.

2. Purple from logwood, and of ſome intenſity.

3. Blue, by the addition of verdigris.

4. A lemon or ſalmon from annatto; and

5. An orange by addition of an alkali. *

6. Bright or pale blue green from verdigris and ſpirit of ſal ammoniac, and ſometimes tartar. Vinegar was formerly uſed till the ammoniac

The

---

muchbehoves the operator to be very careful of. The acid rendering many ſubſtances yellow, by its contact with them, is from the combuſtion which it cauſes.

Among the new acids that bid fair to be of the greateſt advantage, are thoſe of phoſphorus and borax, from the fixity of their nature.

* The common peach or ſalmon is with aſh and annatto.

Annatto colours with blue will hardly ſtand the lime.

Digitized by Google

was introduced by a chymiſt at Manchester (82)The vol. alk. ſhould however be abſolutely pure; but its great pungency is no proof of that ſee teſts further on. A green has been beforeſaid to be procurable from the proper ſolution of indigo and the Saxon blue. Weld, brazil, aſh, and copperas will form a green, if ſteeped all night, the hue and ſtrength, of courſe varying with the proportions; but theſe decoctions or macerations ſhould be in ſoft water, otherwiſe the ill-effects of ſelenite (vitriolic acid and lime) being decompoſed will be too viſible. Greens are likewiſe procurable by decoctions of various barks and woods by rincing. Among metals whoſe calces are green, nickel ſtands prominent, and is to be uſed to advantage.

Note. Reſpecting the procuring of a green whether from calces of metals, or precipitates, or lakes, from vegetables or animal ſubſtances (note 72) it is obſerved that whatever may be the boaſts of operators, it muſt be allowed, none equal the green procured from indigo and ſubſequent welding: the others in general, being blue

or

(82) A chymiſt at Old Ford, Middleſex, and a manufacturer of ſal ammoniac, glaubers ſalts &c. likewiſe introduced this article to uſe about London.

Digitized by Google

or olave greens. In ſhort, nature ſeems to ſay, a ſimple green ſhall not be allowed (83) or in the language of printers, a faſt chymical green: for if we look round to all the operations of nature and art in producing a green, we ſhall find it the reſult of a combination of yellow and blue, and the combination evidently to be traced out, and in many inſtances decompoſed.

French berry yellow, whatever other ſubſtances may be added to it is ſo fugitive that it is rarely uſed now in reſpectable work.

Black of a moſt indelible nature, is procured by diluting a ſolution of ſilver in nitrous acid with diſtilled water, and a little gum; and imprinting it on a cloth impregnated with ſolution of iſinglaſs.

The

When vinegar was uſed, it is a certainty the quality of it was not properly inquired into, and without a knowledge of chymiſtry the ammoniac cannot be managed always with certainty. But a deal depends on the nature of the thickening.

(83) In the priſmatic colours, green is the point of contact between the extreme colours, and in this inſtance, ſome analogy may be found between permanent colours produced by dyeing, and thoſe by the priſm: the extreme colours or the moſt ſimple, being red and deep purple: but as the order of the rays approach to the green, they ſeem to coaleſce, till they advance to the green itſelf, which is a direct union of the blue and yellow.

The artiſt mentioned note 79, is in poſſeſſion of the beſt chymick green, of all the writer knows of.

Digitized by Google

The moſt modern teſt of the ſtrength of a colour is the dephlogiſticated marine acid, (ſee Berthollet's treatiſe on it, and ſee note 21 to Gen. Reflect.) as it operates very quickly, juſt as the air and ſun does in a long time. The change it produces is attributed to a ſlow combuſtion, on the ſame principle as it operates when uſed for bleaching; but in diſcharging colours, if there be iron in them it is not ſo effective.

After the gradation the writer has hitherto affected, from the language moſt commonly in uſe in the printing buſineſs, to ſomething cloſer to that of ſcience, he would willingly riſe to the moſt modern, which is daily getting ground: but this, were he ever ſo competent, he muſt not be diffuſive on yet (84) for, to exhibit now what little

(84) In a ſupplement, or elſe in the work hinted at note to prel. ſug. the new terms, the new theories, and new facts, will be exhibited both diſtinctly and incorporated with what is of practical concern, properly explained and exemplified. (Perhaps he may give a ſpecific views of proportions) As to what he has in this work attempted, he could here correct himſelf, eſpecially in ſome practical matters, but he defires the reader, particularly the critical reader, to note what is obſerved at the back of the dedication,

Digitized by Google

little he knows of the foundation on which it is raiſed, would be ſuppoſing an acquaintance with principles to exiſt among thoſe to whom he writes, that certainty does not (eſpecially about London) which he here means to mention for the laſt time. However, what he now advances, he does only with a view to ſtimulate thoſe few who know ſomething of the old chymiſtry, to a beter acquaintance with the new.

The greateſt agent in moſt natural operations is called oxygen, and its effects oxygenation; which is, that certain ſubſtances in conſequence of certain powers of attraction or affinity abſorb the vital air of the atmoſphere.

The diminution of oxygen, or vital air, in the oxyd or calx, and of Hydrogen, or inflammable air, in the colouring ſubſtance, is the cauſe of colouring effects. If the oxygen combine with the colouring particles, the hydrogen is retained and conſequently the colour; but if the hydrogen be diſengaged, the carbone, or charcoal, manifeſts

---

tion, and what is affixed to the end of the work as an advertiſement; only begging to repeat here the time he had to ſpare from his engagements. (See prelim. ſuggeſtions) was little, he durſt not have riſked expences of editors, reviſors, &c. and laſtly that he had to combat the ill will of thoſe who deemed the publication a mere divulging of practical ſecrets.

Digitized by Google

feſts itſelf by the colour appearing brown or yellow (this theory is applicable to what is called foxing the purples as juſt ſpoken of) for carbone being contained along with hydrogen in all vegetable ſubſtances, according to the proportion of carbone left by any operation it will be ſeen by the hue it leaves. Indigo has more carbone in its compoſition than muſt ſubſtances.

Thus the proceſſes of aſhing, ſouring, raiſing the colour, fielding, &c. are accounted for by oxygenation having taken place, that is, an abſorption of vital air; and its attendant and conſequent combuſtion of the colouring matter (85) or, in ſome caſes, as in unbleached flax, ſilk, thread, or cloth, what may be called the diſcolouring matter.

Of new terms, the chief acids, vitriolic, marine, and nitrous, are called ſulphuric, muriatic, and nitric. Allum is ſulphat of alumine. Copperas acetite of copper, &c. &c. The combinations of vitriolic acid with various other ſubſtances are ſulphats or ſulphites; marine acid, muriats, &c. (ſee note preceding) as already alluded to before.

(85) In branning, the bran acts only on the colouring ſubſtance, which an alkali would do, but the alkali would diſturb the acids that hold the colouring ſubſtance, of courſe the whole would be diſturbed.

Digitized by Google

A conciſe Diſplay of ſeveral Teſts or Reactives for aſcertaining the Qualities of various Articles in Uſe among Callico-Printers; with a few Experiments illuſtrative of the Modes of applying them. (85)

Note. It is to be underſtood though ſolution is not always mentioned, the articles mentioned are moſtly uſed in a diſſolved ſtate, and the ſolvents, whether acids or water, muſt be perfectly pure. Water muſt be diſtilled. (86)

LIXIVIUM *of Pruſſian blue* detects iron in any liquid by turning it blue.---*Tincture of galls*, by

(85) Sets of theſe teſts may be had of ſeveral Chymiſts; or ſee Gottling's Treatiſe, from which advantage is here taken.

(86) Thus, ſuppoſe it be required to know if iron be in alum, the ſolution of the alum muſt be in diſtilled water, otherwiſe the alum. though pure, may be diſſolved in water that itſelf contains iron; of courſe, the iron that is detected will be no proof of the impurity of the alum. Or, a teſt itſelf may be impure; and have within itſelf the very

Digitized by Google

by turning it violet or black. (87)---*Tincture of litmus* ſhews an acid by turning the liquid red---*Paper coloured with braſil liquor* an alkali by turning it violet. (acids turn it red again)---*Turmeric paper* detects alkaline ſalts by a brown (acids turn it yellow again.)--*Litmus paper made red with vinegar* ſhews alkaline ſalts, and earth held in ſolution by fixed air by the red turning blue--*Vitriolic acid*, ſhews fixed air, by a ſlight efferveſcence; alkaline ſalts and earths by a ſelenite or inſoluble ſubſtance; ponderous earth, by a ſparry one; nitrous acid, by the fumes produced by heating the liquor, moiſtning the ſtopper with vol. alk. and holding it over the heated liquor; marine acid by the ſame teſt---*Nitrous acid*

---

very ſubſtance it is wiſhed to detect in another: hence, the effect muſt be obviouſly inconcluſive; and hence, though theſe teſts are here diſplayed, and juſt ſaid to be certain, they can only be ſo, according as they are pure, or as they are properly applied; and to do which, requires no ſmall ſhare of chemical knowledge and experience; but in ſhort, like other documents in this work, theſe are offered, to ſhew how needful a chemical knowledge is to a colour-maker, and as an inducement to try to attain it,* rather than as any thing like what may be deemed perfect, or concluſive in point of practice, or fit for the chemical adept to look at; for the writer repeats, he does not addreſs himſelf to proficients.

(87) Unleſs held in ſolution by fixed air.

(88) This

Digitized by Google

acid detects fixed air by a slight effervescence, liver of sulphur by the smell of rotten eggs, and a white prec.---*Lime water* detects fixed air by a chalky prec. corrosive sublimate by a dirty yellow prec. copper by a green, emetic tartar by a white. ---*Acid of sugar* detects lime by a selenetic prec. and rendering the liquid thick; magnesia by a similar selenite---*Vinegar* detects vol. alk. by holding the outside of a glass tube over the liquor by fumes arising from the surface; nitrous acid by the same---*Pure vegetable alk.* detects magnesian earth by a white prec. likewise lime, earth of alum and iron partly---*Mild veg. alk.* precipitates all earths and metals held in solution by means of an acid; detects an acid by little bubbles of air; corrosive sublimate by a white or orange prec.---*Caustic vol. alk.* precipitates all the earths and iron almost in a metallic state: Copper by a blue.---*Mild vol. alk.* seperates all earths; detects copper by a blue---*Soap* shews fixed air or any other acid; or it is decomposed by earthy or metallic neutral salts, shewing a flaky substance (note 76)---*Solution of silver* in nitrous acid, detects vitriolic and marine acid, after saturating them with nitrous acid first. It shews vitriolic acid by a white powder, the marine by a flaky substance; liver of sulphur by a black prec.---*Corrosive sublimate* detects min. alk. combined with fixed air by an orange coloured prec. chalk by a white; hepatic air by a black---*Sugar of lead* detects

Digitized by Google

detects vitriolic or marine acid by a white prec. liver of sulphur or hepatic air by a dark one---*Arsenic* detects hepatic air by a yellow prec.---*Epsom salt* detects caustic alkaline salts by its being decomposed;--- *Sal ammoniac* shews alkalies by augmentation of cold, and extrication of vol. alk.----*Roman vitriol* detects veg. alk. by a dark green; min. alk. by a bright apple green; magnesia by a dark sea green; lime by a yellowish green; earth of alum by a verdigrease green; sulphur or liver of sulphur by a blackish brown. ---*Cuprum ammoniacum* detects arsenic by a yellowish green prec.----*Highly rectified spirit of wine* decomposes all solutions in vitriolic acid; and in large proportions the solutions in nitrous and marine acids, the metallic solutions excepted; it decomposes salts in solution by throwing them down. It likewise separates resinous and ætherio-oily substances.---*Hepatic water*, i. e. water impregnated with hepatic air, detects lead, or any deleterious metal by a dark prec. and iron by the addition of tincture of galls.

Instances of some of the foregoing Tests applied to several articles, by way of examples.

VITRIOLIC ACID containing iron, copper, or lead, a solution of mild vegetable alkali being added, it will throw down a more or less dark coloured precipitate. If the prec be then dried and edulcorated, and pure caustic veg. alk. poured

Digitized by Google

poured on it, if copper be in it, it will appear blue. If the prec. be dried, and hepatic water added, if lead be in it, it will appear blackiſh. If iron be in it, it will be found in the liquid after ſeparation. If it contain ammoniac, by adding acid of tartar, cream of tartar will be produced. ----*Nitrous acid*, containing vitriolic or marine acid, by adding ſolution of heavy earth, or ſugar of lead, ponderous ſpar, or vitriolated lead will be produced. The marine acid is detected by ſolution of ſilver (in aqua fortis) yielding a horny precipitate.----*Marine acid*, containing vitriolic acid, a ſolution of heavy earth or ſugar of lead, will produce white clouds. If it contain copper, by adding an exceſs of mild veg. alk. it will appear blue. If iron, it will appear blackiſh by ſaturating the acid with fixed alkali, and adding tincture of galls ----*Vinegar*, containing vitriolic, marine, or tartarous acid, a ſolution of heavy earth or ſugar of lead will throw down a white inſoluble prec. if marine acid, a white prec. by ſolution of ſilver. If tartarous acid, a white powder by ſaturating the vinegar with potaſh. If copper, a light bluiſh or green prec. by ſaturation with ammoniac.----- *Salt of tartar* or *pure veg. alk.* containing any of the earths, they will be thrown down by ſaturating the alk. with an acid. If vitriolic acid, an inſoluble prec. of a white appearance by ſaturating it with pure nitrous or acetous acid, and adding ſolution of ponderous

Digitized by Google

ponderous ſpar, or ſugar of-lead. If marine acid, a horny ſubſtance by ſolution of ſilver.---*Mineral alkali*, (88) containing vitriolic or marine acid, detected as ſalt of tartar above. If it contain ſalt of tartar, it yields cream of tartar by adding acid of tartar.---- *Cauſtic ſpirit of ammoniac*, or *vol. alk.* containing fixed air, yields a chalky ſubſtance by adding ſolution of lime in marine acid.----*Concrete ammoniac*, containing ſalt of tartar or ſal ammoniac, by heating it on an iron inſtrument, a digeſtive ſalt will be left behind; but if it be pure it will entirely volatilize. Spirit of wine being offered to it cryſtals will be thrown down.---- *Spirit of hartſhorn* containing lime, effervesces by adding an acid; or it yields *no* cryſtals on ſpirit of wine being added.---- *Sal ammoniac* if pure, will entirely volatilize by heat; if not, it will form a prec. by adding ſolution of ſilver or ſugar of-lead.---- *Nitre*, containing marine acid, the marine acid is detected by ſolution of ſilver, ſhewing a horny prec.---- Glauber's ſalt, by an inſoluble prec. or heavy ſpar, by adding ſolution of heavy earth; impure nitre is likewiſe detected by its bitter taſte and weak detonation.——*Alum* (which ſhould be mere earth of alum, vitriolic acid and water,) (89) containing iron, the lixivium of Pruſſian blue

(88) This alk, has lately got much into uſe about Mancheſter, in preference to aſh.

(89) Concrete ammoniac added to a ſolution of pure alum, the alkali and earth unite, and the clay precipitates with a ſmall quantity of fixed air.

Digitized by Google

blue produces a blue; tincture of galls a black: If it contain copper, an alkali tinges the liquor blue.---- *Corrosive ſublimate* containing arſenic, mild vol. alk. will precipitate it, and if the liquor be filtered, and cuprum ammoniacum added, a tranſparent blue liquor will be formed, and the pure corroſive ſublimate left free; but if it contain arſenic, the prec. will be green.---- *Cream of tartar* containing vitriolic ſalts, yields a white prec. inſoluble in nitrous acid, by adding ſugar of lead. If it contain copper, it is detected by vol. alk. held over the fumes. If genuine it is known by its peculiar ſmell.----- *Sugar of Lead* containing nitre, gives the ſmell of aqua fortis, by warming the ſolution, and adding vitriolic acid.----*Roman vitriol*, if pure, by adding cauſtic vol. alk. to the ſolution, will at firſt appear turbid; but more of the alk. will render it tranſparent. If it contain iron a black calx will be thrown down; if it contain zink, it will be white.----*Green Copperas* containing copper, a piece of poliſhed iron being put into a ſolution of it, it will be covered with a coat of copper.(90)---- *White copperas*, or vitriol of zinc containing copper, is detected by vol. alk. held over the fumes. If iron, it is detected by tincture of galls.----*Tin* having lead combined with it, or pouring ſtrong aqua fortis on it and ſetting

(90) This gave riſe to the vulgar idea of iron being turned to copper, by the Angleſea copper company, as they purchaſe large quantities for the purpoſe of immerſion.

Digitized by Google

ſetting it in a warm place, the tin will be calcined while the lead will remain free. Vol. alk, liver of ſulphur, hepatic water, and ſugar of lead, will detect arſenic, if any be in it beſides the lead, by ſhewing a yellowiſh green precipitate, by firſt adding an alkaline ſalt, and then adding cuprum ammoniacum to the filtered liquid. *Verdigreaſe* containing lime, a ſelenite will be formed by offering diluted vitriolic acid to it Gypſum, i. e. vitriolic acid combined with lime, may be detected the ſame way.---- *Iron* containing copper, is ſhewn by a blue appearance, on digeſting the iron with cauſtic vol. alk. or if a ſmall quantity of the filings be diſſolved in marine acid, and a poliſhed plate of iron be added, it will be coated with copper.

N.B. The Writer has ſaid (note 85) *teſts may be had at ſeveral Chymiſts, but it is here added* C. O'BRIEN *will give any one, who is known by him, as of congenial wiſhes with himſelf, particular and uſeful intimation reſpecting them, by applying to him perſonally, or at his houſe Iſlington, his views being (as ſeveral times ſaid) to advance the reſpectability of the buſineſs beyond every other concern,* (ſee Prel. Sug. General Reflections, and elſewhere.)

* *The want of requiſite time among Printers and Colour-makers for ſuch a ſtudy, has been noticed, (and juſt ſaid, to be for the laſt time) but ſtill, though the writer has great reſpect for ſome as men of good natural talents, as well as of great experience, yet he cannot but ſubjoin, that the neglect of ſuch a ſtudy muſt certainly be a drawback on their merit, be it of what caſt it may, or however they may be preſſed with other immediate concerns.*

Digitized by Google

A Retroſpect, or abſtracted View of the Subject juſt diſcuſſed, with occaſional Obſervations, and a conciſe Corrollary educed from the whole.

IN the cloſe of the ſection on copperwork, it is obſerved, and neceſſarily here repeated, that all operative effects, however complex they may appear in proceſs, are to be traced to certain ſimple or elementary ſources, depending on principles that give energy to the whole of the operations; and the cloſer theſe principles are attended to, or inveſtigated, operations are to be proportionably ſimplified, and more eaſily and with more certainty carried into (1) effect; thus as

(1) This conſideration of principles (attempted to be the ruling one throughout the work) may be applied to mental operations, or works of fancy; and is ſo exhibited in the ſection of pattern drawing where genius is ſpoken of, as that principle or vivifying ſpark (there ſo termed) which is the ſpring of excellence in works of invention.

By the term principles (ſo often mentioned) it is concluded is underſtood, not thoſe ſubtle points that

Digitized by Google

as illuſtrating the above poſition, in conſidering the proceſſes treated of in the two preceding ſections, they may be comprized in four parts, which here, ſimilar to the elements of any art or ſcience, are the points from which the ſubſequent operations ſpring, or to which they may all be referred.

Firſt, Cleanſing, or ſo preparing the cloth, that the aſtringent and colouring atoms are not prevented from entering.

Secondly, Expanding the pores when cleanſed, ſo that theſe particles find a ready admiſſion.

Thirdly, Cementing fixing or binding them when entered into the pores when cleanſed and expanded.

Fourthly, Securing or cloſing them in the cloth, when thus cemented, ſo that no future natural nor artificial operation can fairly remove them.

Now

---

that refined theoriſts conteſt; much leſs thoſe more remote ones, enveloped almoſt in metaphyſical obſcurity. But thoſe only, as obſerved in note 28 to copper-work, from which we can form reaſonable conjectures, as the ſprings or commencements of phyſical operations, and which are univerſally allowed to be valid, and in certain degrees immutable.

Digitized by Google

Now, in order to enforce a conſideration of theſe principles, and to ſimplify and bring together the operations treated of, it is neceſſary to aſk in general terms, what are the means to procure thoſe effects, and wherein and how far lies the efficacy of thoſe means? or to ſpeak ſtill cloſer to the ſubject, what are the ſubſtances neceſſary to be removed or applied, according to the quality of the cloth, and what are the articles and proceſſes neceſſary to be uſed for that purpoſe?

In the firſt place, the ſubſtance to be removed being allowed to be of an unctuous quality (whether naturally ſo or as applied to the threads previous to weaving, ſee note 12 to copper-work) it can only be removed by applying another ſubſtance that will attract and mix with it, in preference to whatever elſe it may be offered to; and as alkalies when joined to certain unctuous matters, are known to form a ſoap, they are therefore here applied, and a kind of ſoap being conſequently formed, the hot water looſens it, mixes with it, and eaſily removes it; but as the ſalt of the alkali chiefly acts in this caſe, the earth is ſuppoſed to be left in the pores (2) which the water

(2) Alkaline ſalts are changed into abſorbent earths by frequent ſolutions and evaporations.—See the compendium of chemiſtry.

Digitized by Google

water not being deemed able to remove commodiouſly and ſufficiently, recourſe is generally had to ſouring; as acids more readily effect it (3) the abſorbent earths attracting the acid particles from the liquor in which they are ſuſpended, forming a neutral ſalt, eaſily diſſolved in water, and of courſe eaſily waſhed out (4) and the whitening is facilitated from the abſorbent earths being thus thus neutralized.

Theſe operations therefore are deemed needful to cleanſe the cloth, which is only effectually performed, when its pores are ſufficiently clear to receive the ſaline or aſtringent atoms, that are to attract the colouring ones.—See note 29 in copper work.

The above, it muſt be plain, only reſpects cleanſing; the other parts, including the operation of printing, fixing the colour, &c. being dwelt

(3). Hot water, every one knows, will diſlodge oil or greaſe, and, as in this caſe, alkalies and abſorbent earths; but it is not ſufficient, unleſs what diſlodges them retains them [redacted] combining with them.

(4) Mineral acids act ſimilarly to alkalies in removing the brown or unctuous ſubſtance.

Digitized by Google

dwelt on in other places, the reader is therefore referred to them; but in view of enforcing the idea of conſidering operations as proceeding from a certain point, it may be aſked, how are thoſe various colours and ſhades produced? the anſwer is, by the agency of certain ſaline ſubſtances, (ſee a few pages back) ſuch as allum, ſaccharum ſaturni, &c. which after their application, form an union with certain colouring particles, as of madder, weld, &c. aſſiſted by various and ſucceſſive operations; and which if looked into will be found proceeding from that point into certain direct or lateral connections, that otherwiſe would ſeem confuſed and in many caſes ſuperfluous.

All the circumſtances included in this conſideration, cannot poſſibly be ſpecified, but was every perſon, concerned in theſe or indeed any other operations, to enquire from what points they originate, how they branch out, and to what they lead, it would by degrees form an habitual deſire of acquiring knowledge, which when only partially acquired the ſummit is the eaſier to be attained.(5)

Concerning

(5) As the writer affects to bring in caſes ſomething in point, he here mentions a circumſtance of a perſon

Digitized by Google

Concerning aſhing, ſouring, &c. or more commonly ſpeaking, the preparation, it is much ſimplified

a perſon being employed to repair a copper-plate preſs, having been much uſed to ſuch work; he accordingly took it to-pieces, as the beſt way towards making (as his phraſe was) a good job of it; and after working at it three or four weeks, it was deemed completely in order by a few trials that were made; but that, it ſoon appeared, was far from being the caſe, for though he knew what parts ſhould be together, he did not ſeem to have an idea of tracing their relative connections, as proceeding from the firſt movement; and thus overlooked the firm ſituation the cylinders ſhould revolve in, towards performing with the neceſſary preſſure: for the gudgeon, or pivot-hole, that the pivot or ſpindle at one end of the upper cylinder turned in, was ſo inſecurely placed, that in the paſſing of the plate, it was lifted up a third of an inch, and the conſequence was always evident in the impreſſion, and when the cauſe was diſcovered it was by mere accident.

It would be like affectation to enter here into a copious mechanical diſquiſition of the matter, but it may be ſaid the conſiderations in this caſe, ſhould have been, 1. what the effect required, 2. what the power or velocity to procure that effect, 3. what the diſtance

Digitized by Google

plified to what it formerly was; (6) and of late years, the proceſſes among profeſſed bleachers, have

---

reſiſtance to that power, and 4, what the method to obtain it and likewiſe to ſecure it? and then to have proceeded accordingly.

It is however ventured to obſerve, that in copper-plate printing preſſes, the ſituation of the winch does not ſeem to be properly attended to in working quarter or ½ quarter plates; for, as it is in the pinch that the force is moſt requiſite, the winch (which mechanically ſpeaking is a lever of the ſecond kind) ſhould be ſo fixed, as to be at that time either in the higheſt or loweſt part of the circle which it deſcribes; or, if but one perſon acts, in that point from which he pulls, as in any other the perſons, who turn it, cannot uſe their ſtrength to the moſt advantage, though with the aſſiſtance of the flier; which, by the way, as an aſſiſtant, is contended among mechanics wherein it is ſo, in fact, for reaſons which will not here be entered into, there ſhould be a winch at each ſide of the preſs, but then for whole plate printing, they ſhould not ſtand one up and the other down, as for quater, or half quarter plate work, but rather thus. |—

(6) Some at this time lay very little ſtreſs on the utility of dunging, &c.

A groſs error is prevalent among Printers, reſpecting

have been so altered or retrenched, that in respect to practice two elaborate and judicious writers, Dr. Home and Mr. Curry, are growing obsolete

---

respecting the introduction of dunging, which is, that a Cow having got among goods that were laid to whiten, where her ordure fell they were observed to be the whitest; but the use of dung was common long ago, in many cases, on the Continent; some however think it might be spared from Callico-Printing, though some imagine it rouses the colour, but what effect it has is supposed to proceed from its volatile alkaline quality (as said already). Dogs excrement is used in the Levant for brightening the lee used in dyeing goats skins; and it is common here in the dyeing of thread to use sheeps dung.

Now, according to the intention of this Retrospect, it should here be asked, what is the quality of dung? which when answered, we may then judge of the propriety of using it; as an answer, it may be said, it is a vegetable putrefaction; of course it is alkaline, and should not be indiscreetly used.—See the section of Dunging.

In agriculture, the salts in it are supposed to open the roots of vegetables, and that thereby they are more disposed to receive that humidity from the earth

Digitized by Google

obsolete; (7) to which the great improvements lately made in the cotton manufacture, and that of British callicoes, have undoubtedly contributed, and even at this time (1790) bleaching is undergoing a considerable improvement.(8)

The

---

earth necessary for their nourishment, and fruitfulness.

The above suggestions may be applied to branning; and if the purpose for which bran is used, be investigated, other articles would be found as useful, which are far more œconomical: but for cleansing, some acidity is required, and there, perhaps, the writer has forced a meaning in deeming it souring.

(7) Dr. Home says, that among Bleachers by profession, the pieces are first soaked in warm water; but this is not done now in Lancashire. He likewise says, in souring, the foulness in the cloth so much attracts the acid particles, that the water is tasteless; this however is not the case in souring among printers.—See however note 12 to copper-work, and the article maddering.

(8) The writer now knows a Chymist of repute, who says, he has discovered a mode cheaper and more efficacious than any yet used; and the same with iron liquor; which will perhaps shortly be publickly announced.

Digitized by Google

The above causes a suggestion, that though the metropolis ever must be the center of taste and fashion, and though (turning to the subject of this treatise) some Printers about town have had sufficient reason to complain of certain practices of many in the country, but which by a late legal process it is probable will be checked, (9) yet it is in the country that improvements, as

(9) The case was a pattern of Messrs Greaves' Newton and Co's being closely imitated by Watson and Co. the fact not being contended, but only a misconception of the meaning of the act, Lord Kenyon in his charge, severely reprobated the practice of such piracies, as bidding defiance to *law*, and the protection Parliament had granted to genius and industry; and plainly intimated, that if such a case came again before him, of an imitation being so near the original, as to pass for it, very little indulgence indeed might be expected.—See notes 13 and 15.

Of the performances in the country, on the principle of expedition, none have more surprized Printers about town, than those of cutting and finishing various patterns; but respecting the mode of doing it, no more, for sufficient reasons, will be said, than that it has been frequently done to answer a very illaudable purpose, and generally with the

Digitized by Google

as generally called, have chiefly originated (ſee note below) though very likely the offſpring of ceſſity more than choice, or from the low price

---

the power only of printing a piece or two, as the whole was often cut over again, to execute a courſe of work.—See note 32 to copper-work.

An inſtance has been lately given of ſimilar expedition in copper-plate work, in the imitation of a celebrated and truly excellent dark ground pattern, (ſee further on) the imitation being executed in a tenth of the time the original took: the execution, however, it muſt be owned, is neither to the credit of the drawing, nor the engraving, whatever engraving there may be in it; and on the principle juſt reprobated, of ſtill leſs to the publiſher of it; but, notwithſtanding theſe practices, it is plain the infatuation of ſetting up printing grounds in the country on a monopolizing or underſelling plan, has, like other furors, had its paroxyſm (ſee note 13) and the fallacy of the prediction, that the buſineſs would be nearly all done in the country, is now evident enough: as land, labour and proviſions are not to be had on ſuch eaſy terms as formerly; excluſive of the little credit of country paper currency, ſince the failure of Moſney, and the many ſubſequent ones, and the market being overſtocked by the quantity of wretched work, latterly diſembogued by that houſe as well as by ſeveral others.

Digitized by Google

country work in general is rated at; they have however, from the modes of purſuing them, ruined, or helped to ruin many; though perhaps a few who act with foreſight and on ſome plan, are profitting by them; (10) for inſtance, the greateſt

(10) Innovations, particularly on a mechanical principle, are ſpreading pretty widely in the country; and machines of various conſtructions are increaſing about town; and perhaps many town Printers will hardly credit that engraved cylinders perform as expeditiouſly as the common pin ones, that a machine for block printing was invented and uſed ſome time, with which any one could *print* as eaſily as turn a winch, (the ſpecification for a patent was even made out) and that in machine printing, four cylinders may be uſed at once in different colours.

The writer can ſpeak of this with confidence, having the advantage of knowing what has been done, and what has been farther attempted; and was abſolutely in a concern where an almoſt general courſe of printing by machines only, was to have been adopted, a ſyſtem being formed for that purpoſe; but certain conſiderations, among which the idea of ſuch modes being ultimately injurious, from enabling the proprietors to underwork others, operating not a little with him, ſet the plan aſide.

But this is a ſubject neither ſafe nor proper to ſpeak

Digitized by Google

greateſt houſe of all (Liveſy's and Co) where every thing that was deemed an improvement

---

ſpeak of, at leaſt for the preſent; unleſs it may be permitted to ſay, (as having ſome relation with it, and being among the cauſes) that a ſpirit of combination has unfortunately prevailed, oppoſition will inevitably follow, and few ultimately will have occaſion to rejoice; for when the neceſſary diſtinction between principals and ſubordinates is deſtroyed, who will willingly enter into a buſineſs liable to be thus cramped, or remain in it unleſs under very particular conſiderations, without ſeeking the means of executing work with leſs manual aſſiſtance? and that ſuch means are to be obtained, the writer, from his own knowledge can ſay, is, under certain circumſtances, to be performed beyond what many imagine, or will perhaps believe; beſides, without affecting a prophetic ſpirit, let it be conſidered, that in the mutation of ſtile or faſhion, callico printing has to fear a decline, or at leaſt a ſuſpenſion; and then the ſpirit of combination muſt evaporate;—even at this very time (1790) ſomething may be apprehended from the countenance given by Royalty (and Vice-Royalty) to a manufacture, that for ſome years has been little encouraged.

It is very far from affectation or oppoſition, that theſe

was put in practice, and where labour was had at

these matters are freely treated; for it is to be feared that those who boast of having carried their point, (which by the bye, a favourable coincidence of circumstances forwarded perhaps more than wisdom or sagacity) are too much blinded by it, to see the certain consequences, that sooner or later *must* follow*, as to their plea on a legal score, it would have little countenance in a court of justice, if we may judge by the severity with which several late combinations have been *treated*, the letter of the law itself being directly pointed to inflictions of that nature, without opening for escape or evasion; and why the law is so pointed, is on the principle that combinations obstruct trade: and in this case, what master Printer can venture to engage patterns, when

* *When subordinates or lower classes acquire power in any shape, it is rarely used with temperance: and in this case, it would not be wonderful, if the Congress, as usually called, hindered certain disapproved masters from having any men at all; or perhaps some of them might be for prescribing what kind of work they chuse to print, as well as they have often condemned certain prints; these suggestions are only intimated to the intemperate, as the few intelligent men that are among them, or those that through necessity closed with the scheme, do not need them; and many, it is well known, find it very heavy to contribute to the fund; which, by report, can hardly answer the demands on it.*

Digitized by Google

at the lowest price, has, to appearance, irretrieval

when he doubts (which he may now) whether he may be allowed men to work them, or men to even work at all; thus, if the regular channel of business is impeded, stupidity itself must see the certain consequences; as to the restraint about apprentices, it would be proper enough if every apprentice proved to be a tolerable workman, but that is not the case with one in ten; of course, a proper succession of hands is prevented; but, if the association had been winked at, or if certain exertions for moderating this refractory spirit, and procuring an equilibrium of interests between master and man, had been aided, an extremity of proceedings (which will undoubtedly be the case) would have been prevented; however, at any rate, and for reasons which those who look only as far as a Saturday-night,* cannot see or will allow, power, in this instance, should be in the hands of the Principal.

At the same time let Principals be reminded, as a counter charge, that compacts between them respecting journeymen have been broken;† and were any to be made, and confirmed and sanctioned by law, various

* *Though some may not be pleased at mentioning it, yet great wages is an evil to those who know no use of money, but to get rid of it at that period.*

† *In a late trial (July 1790, at Guildhall) 500£. damages were given, for one Manufacturer inticing men away from another: heavy damages being directed by Lord Kenyon to be laid.*

Digitized by Google

bly failed; (11) while its great and avowed rival *seems* (see however what is said further on) to

various causes will still tend to break them: for when men are wanted they must be had; but a junction of interests in such a case is hard to be formed.—See something relative to this in the essay respecting masters and men.

Something on a combinatory principle, has been in agitation among another class, but of which no more will be said, than that the writer laments any proposals should ever be made, to sell works of genius or fancy at so much per inch.*

(11) It is said this place was the means of giving bread to near 20,000 persons; cloth in whitstering has occupied ground 12 miles in length, near 300 tables have been employed, and near 40 coppers at work at one time; 6 or 700 cylinders have been cut or pinned; common prints, &c. innumerable; and it is well known, one man, at the beginning, made a decent fortune by the cutting of them; but, as observed above, the price of labour was latterly reduced as much as possible: by converting (as done at other places) herds of Lancashire boors into drawers, cutters,

* *A Plan of Mr. Lukey's (included in the general one) to excite emulation among Designers, merited consideration; but Master Printers and Drapers must join for that purpose before it can be effected; and being for their mutual credit and interest, it were well if they would. It however can never be too late to adopt something of the kind.*

Digitized by Google

to have hitherto profitted by adopting ſimilar modes; and by attending to quality as well as

cutters, printers, machine-worker &c. and the work was latterly proportionably execrable.

Of the failure it may be ſaid, who in times paſt would have believed, or who in times to come will, that a connection reputedly worth above 150,000l. at its commencement, ſhould in a few years crumble under the deficiency of near a million and a half; and that among thoſe involved in the accommodation labyrinth, who fell in conſequence (excluſive of Gibſon and Johnſon) ſome were for 10 or 20,000l. who, comparatively ſpeaking, poſſeſſed little indeed? ſaying nothing of thoſe who lingered ſome time, or thoſe who were more or leſs ſhaken, or may be ſhaking at this moment.

It muſt however be obſerved, that in trying to reinſtate the firm, it was endeavoured to prove that if it were ſupported till affairs could be arranged, there would be a balance in hand of 60,000l. but the attempt was in vain; the anſwer in general being, in effect, that ſuch egregious folly and extreme madneſs had little title either to ſuccour for the preſent, or confidence for the future.

As to the manœuverings to raiſe ſupplies, they were carried to ſuch enormous and unprecedented heighths, branched out into ſuch complicated mazes and ſo finely ſpun, as hitherto to have baffled the

powers

Digitized by Google

quantity, it has in ſome caſes exhibited reſpectable work; but without a compliment to the principal

powers of a Thurlowe or Kenyon to unravel*, but perhaps it was thought the magnitude of the concern was ſo great, its connections ſo wide and important, the reſources ſo various, and the bank ſo expedient, that it would be upheld in defiance of common contingences; and probably the blow was at leaſt, not ſo ſoon expected.

But whether or not that was the caſe, many muſt ſmartingly remember the immediate effect of the ſhock was an awful gloom, diffuſing itſelf as if credit were at its laſt gaſp; or, as if that ſpecies of honour on which the very exiſtence of Trade, Manufactures, and Commerce depends, had approached its diſſolution; Manufacturers and Traders of various deſcriptions, crouding to town, tremblingly anxious to know their fate; the *miaſma* expanding ſo widely that few in any trading connection knew on what ground they ſtood. The conſequences however muſt tranſmit a warning to future adventurers, how they precipitately adopt ill-digeſted plans, purſue immethodical operations, or execute deſperate reſolutions, eſpecially if on a mo-

* *At the writing of this, the principle of their fictitious notes was under the conſideration of the twelve Judges.*

Digitized by Google

Principal, his labour, attention, investigation and systematical arrangement of the business, as well as his conception of trade in general, must have been very great to reach the height to which he is now arrived; and, judging by what has happened, unless vague politics now distract his attention, (12) he is the man of resolution and enterprize, whom other Printers (a very few excepted) have either to fear or emulate.

monopolizing and underselling principle, or, as if determined either to be the greatest gainers, or greatest bankrupts; but in short, of the whole it may be suggested in a few words, without distortion or aggravation, and a lamentable remembrancer it is to hundreds, that its commencement was rash, its prosecution desperate, and its termination *** !!!

(12) Being returned a Member of Parliament. See a Pamphlet ascribed to him on the national debt. (Something similar was published a few years ago under the title of "The national debt, "no national grievance."

In the political *mania* existing among Manufacturers, if Money had stood, it is probable the competition between it and Bury would have extended

to

But, while praiſe is beſtowed where merited, it is here freely ſaid, may thoſe practices juſt ſpoken

---

to this object; for as it was, the Principals ſeemed latterly to have loſt ſight of Callico Printing, among their various ſpeculative practices; indeed one of them (Smith) generally had political buſineſs enough on his hands; (his interference reſpecting the Callico-Printers' bill, is as well remembered, as his argumentative powers were acknowledged) but with what propriety Printers, Manufacturers and Tradeſmen in various and extenſive dealings and connections, plunge into the abyſs of politics, beyond what concerns their immediate vocations, is not attempted here to decide; as it may be partly gathered from the rebuff Lord Thurlowe gave Joſiah Wedgwood, in ſaying, whatever he might be as a Potter, he was an indifferent politician.

Of the pamphlet above alluded to, it may be obſerved, that moſt men in buſineſs, in what they write, naturally have an eye to their immediate vocations and intereſts: thus Mr. P——e dwells upon the increaſe of manufacture, but paſſes over thoſe practices that, however they overload the market, leſſen the value of commodities, and is ſilent about that reſpectability which keeps up the ſpirit of any profeſſion, or that is a proper inducement for genius to exert itſelf; for of the vaſt quantities he himſelf

Digitized by Google

ſpoken of, (too notorious to need ſpecifying,) be ever ſtigmatized, diſcountenanced, and repro-

 bated

himſelf has thrown into the market, a great part is well known to have coſt him little on the ſcore of deſign and execution, the ſale at the ſame time being undoubted.*

And the writer cannot but lament, that while the Miniſter in the late diſplay of the proſperous ſtate of the nation, on opening the Budget for 1790, was attributing it to the increaſe of manufactures, and the conſumption of articles, he was ſilent on the probability of ſome of the manufactories going to decay at the ſame time, as he only regulated his deciſions by the ſtate of the exciſe and cuſtoms; thus to come home to the ſubject, he can only eſtimate the proſperity of the Callico-printing buſineſs by the entries, which in this caſe is the ſame, whether work ſells at 10d. per yard, or 10s. (if the ſame kind of cloth is uſed) but it is evident while this has been encreaſing, Printers have been ruining themſelves, by aiming at quantity rather than quality, and lowering the market to get off that quantity. Here the caſe of Lively and Co. offers itſelf, for

* *What a triumph it is, that notwithſtanding this, there are Printers ſtill gaining by a reſpectable line, and though their work ſells high.*

bated, as they must *eternally blacken* the character of the practiser of them, in the eyes of those who have a regard for the present and future respectability of the business, or the protection and reward that genius

for, while they were deluging the home and foreign markets, they were rapidly declining, in credit at least; and undoubtedly many 1000 yards that paid duty years back, are not disposed of yet: therefore the quantity they did, as appearing in the Excise books, was no proof of prosperity, but quite the contrary.—See note in General reflections about the Minister's knowledge of the minutiæ of trade.

And, here it is repeated, is the oversight in the Pamphlet, in no notice being taken of that respectability which ought to be preserved in any business, that by proper means the market be kept open, and that one Manufacturer should not, by illaudable practices, render his profession, and what he produces, of such little value, that at last it is neither beneficial nor creditable in any respect whatever.

Of the point chiefly dwelt on in the above-mentioned pamphlet, it may be just remarked, that national credit, like that of tradesmen, can only reach a certain height without breaking; and high as England is now in political health, or firm in constitution, who can say how long she may remain so, or that even the means employed to keep her so, may not defeat the intent, or that another Gibbons, some centuries hence, may not attempt to account for

genius, and a spirited exertion to maintain that respectability, has a right, not only to *expect*, but to DEMAND. (13)

---

for the decline of the British Empire? as every century produces great political and commercial Revolutions; and the present appears remarkably pregnant.

(13) As there always were, and always will be, men who bid defiance to legal obligations, as well as mere moral ones, those piratical practices, unwarrantable in intention, disgraceful in execution, and destructive in their tendency, will probably never be stopped; and the check they have received, (see note 9) is far from remedying the evil, for an elaborate pattern of the same Parties was soon after imitated.—See note 14, and the General Reflections, &c.

Respecting monopolizing and underselling by means of *cramming* the market with low priced work, it must inevitably, in the course of things, help to bring Callico Printing into disrepute; and, as it has been said, if it could be supposed for a moment, (see the end of colour-making) a chemical course were universally adopted, printing would soon loose its repute; so here it may be said, without that being the case, if what is called fast-work be brought into such a disreputable stile, similar consequences must happen; and if three or four houses about town, which in regard to design, execution, and an adequate price, keep up its respectability, were to decline the business, the time would

In regard to the buſineſs itſelf, it may be intimated, as a further attempt to reduce the whole of

would not be far off; but ſuch an idea is unpleaſing, and it is therefore waved.

Perhaps it is fortunate the original plan of the Linen Hall intended to have been opened on the Continent, Apr 1788, has not been purſued; for certainly it would have cauſed an opening for large depoſits of wretched work; but of that matter, what the writer can ſay about it will be particularly reſerved for another occaſion.*

Having ſpoken of cheapneſs of labour, &c. in the country, it is here ſuggeſted, that what has been done, and perhaps is now doing there, cannot be ſo done about town; for at the great country houſes the ſubordinates have been uſed to look up to the principals as a ſuperior kind of beings; and were therefore held as much as poſſible in a ſtate of mental ſubjection, (perhaps the ſchool at Bury is an exception; though who can judge the founder's views) but ſubordinates about town have higher ideas; and it is ſaid here to a certainty, how diſappointed principals uſed to ſuch implicit obedience, and, procuring on almoſt what terms they pleaſed, the extremity of ſervice at a nod, have found themſelves in attempting the ſame about town; this however is probably gone by, for it

* *It need hardly be ſaid, that now, Public Sales are perverted to* partial *inſtead of general accommodation: hence that great ſcheme would have miſſed its proper end.*

Digitized by Google

of what has been said in both parts of this work, as much as possible into a contracted view (for it seems

is fact, that at this time (1790) the first houses in the country begin to find, that in the intoxication of temporary gain, they overshot prudential caution, having nurtured what now proves rebellious; and would willingly compromise with tow Printers for the suppression: and likewise finding they have brought the marketable price so low, as to destroy the balance between that and the price of labour, would gladly join in reducing it, and fixing it by law: (tho' that always renders workmen doubly rancorous against Principals) but the evil is of very natural growth, and the folly or impolicy is now seen and felt, of putting at one time and another, 50 or 100 rude country hinds to printing, cutting, copper-work, &c. as they now begin to be of consequence, considering themselves as something more than machines, and pretend to dictate about price, time, apprentices, cylinders, &c. for in compliance with their demands one of the first Printers has put down one third of his machines, and submitted to other injunctions; and it seems as if apprentices had caught the influenza, for two grounds have advertised for about 30 each, that have absconded, and two others for near 20 each (see the Manchester papers for June and July 1790*) and it is not quite irrevalent to say the minister is not likely now † to be threatened

* *A threatening Letter was sent to Roe and Kershaw, demanding the suppression of Machines. See the same papers.*

† *See P—le's examination by the Lords and Commons.*

Digitized by Google

seems impossible to bring it absolutely to a point) that in the establishment and management of it, it is naturally divisible into three distinct parts, *Firstly*, The inventive and mechanical, as treated of in the first part of this work: *Secondly*, The chemical and philosophical, as discussed in this second part: and *Thirdly*, (what has not come within the plan of this treatise) the trading and commercial, or, in printing for Drapers, the home accounts and town business; thus, pursuing the same mode as in the Retrospect of bleaching and copper-work, if a train or connection of all the operations in the business could be formed, it is presumed it would be something like what follows; for the necessary distinction above made, prevents a regular chain of *process*; one part being to prepare utensils for conveying colour to the cloth, while the other is preparing the cloth to receive the colour; though afterwards, the processes go on in a single series.

---

threatened with their being transplanted along with the business to another place.—See General Reflections, and note 19 to the same.

In fact, town Printers have partly to blame themselves; having first supplied country ones, by selling them their old prints; and old Mr. Peele has often said, the sending of goods into the country to be whitstered, forwarded the establishment of Printing Grounds.

Digitized by Google

One diviſion therefore undoubtedly comprehends, with their ſubordinate conſiderations,* thoſe of

1. DRAWINGS, or Patterns, which, whether originals, imitations, or direct copies, the principle conſiſts in adapting them to certain markets.

2. PUTTING-ON, or transferring them to blocks, plates, cylinders, &c. requiring as its principle, an even face, and joining, or ſuch management, that in the end the effect of the pattern is obtained: In this department is included the management of blocks.

3. CUTTING (comprizing pinning, &c.) on the principle of a ſound bottom and clear face.

4. ENGRAVING, requiring diſtinction in the ſtrokes, and depth combined with ſtrength and neatneſs.

The other diviſion comprizes, with the uſual or occaſional intermediate operations of branning dunging, waſhing, pencilling, after grounding, &c. the conſiderations of

1. STEEPING THE CLOTH, or removing dirt or certain ſlight ſtains.

2. ASHING,

* It cannot be enforced too much, that every conſideration includes that of what will be the effect at laſt

Digitized by Google

2. ASHING, or removing brownness, grease, &c.

3. SOURING, (sometimes alone sufficient) for removing grease, iron-moulds, stains, &c. the principle of which, as well as of ashing, being to open and enlarge the pores of the cloth, that it may properly imbibe the astringent and colouring particles.

4. CALENDERING (including stretching, occasionally stiffening, stowing, &c.) requiring an attention chiefly to keep the woof, and shoot as square as possible.

Here the division of processes ceases, consisting in the operation of

PRINTING, the principle of which, whether with blocks, plates, cylinders, &c. is properly furnishing them, and regularly impressing the colour into the cloth.* As to colour-making it cannot be brought into either of these trains of processes, it standing by itself in providing those agents applied to the cloth by printing, for procuring the colour, assisted by the two distinct preparatory trains of processes just exhibited.

After this junction, the considerations then are

1st. STOWING, or drying or keeping the cloth in a dry state, that the saline particles in the colour

* This being the case, the capacities of lads put to the printing table should be better considered than they are; and were it done, the dulness of journeymen would not be so proverbial as it is. In

colour may not be dispersed, or as the phrase is, that the colour does not run.--- See note 34 to colour-making.

2. CLEARING, or removing the sightning and thickning, so that as little else as possible, besides the astringents be left in the cloth.

3. MADDERING, WELDING, &c. or using certain substances, on the principle of their colouring particles being attracted and retained by the astringents already in the cloth, as applied by printing.

4. FIELDING, or displacing the superfluous particles of colour, by laying down, planking, &c on the principle, that certain effects are procured by friction, pressure, evaporation, &c.

As to the mode of managing the business, it would be absurd and highly presumptuous in the writer, to advance any thing particular for reasons repeatedly given, except that to conduct it properly, requires an understanding beyond what is conceived as a common one, or even one acquired merely by experience; for leaving it to superintendants is always attended with more or less

---

fact, every thing depends on it, for unless the colour is properly imbibed by the cloth, (as said already) the Drawer, Cutter, and Colour-maker, have laboured to little purpose; and the Copperman cannot possibly remove nor cover the evil.

Digitized by Google

less inconvenience; and servants, who make their employers interests their own, or even able to advise with, are rarely to be met with; but generally speaking, it may be said, whether in the commencement or prosecution of it, resources or connections to supply work, and conveniences to execute it, are equally of the first concern; next to these, as far as such a complicated business will permit, is forming an estimate of certain expences, in the price of drugs, labour, and utensils, as well as the probable profit; which includes the knowledge of the nature and value of drawing, cutting, &c: whatever else is necessary to be considered in respect to theory, system, &c. is so often spoken of, that it must be needless dwelling on it here; it is however earnestly again recommended to be thought of (see note 7 to copper-work, and note 51 to colour-making) that from the complicatory nature of callico-printing, and the difficulties attending the prosecution of the various requisite processes, (which a slight survey even of this tract will evince) it must be folly superlative for any person rashly to enter into it (14) on an idea he can in a year or two

(14) The numbers who have not succeeded, particularly in the country, are strong proofs of this; even at Mosney, not one of the Principals could

two, acquire a proper knowledge of it; as to thoſe who are in it, it has been repeatedly intimated they ſhould turn their thoughts towards its principles, the parts that compoſe it, and the relation they bear to each other, (ſee note 28 to copper-work, and note 1 of this retroſpect) for merely knowing whether work is done well or not, may be ſufficient for a Draper, or Saleſman, but a Callico-Printer ought to know why work badly done is ſo, and conſequently, how it ſhould be done otherwiſe.

Similar now to what is ſaid at the end of the firſt part of this treatiſe (there neceſſarily placed, and chiefly applicable to practice, and what could be partly reduced to rule) are annexed here, a few poſitions gathered from the ſubſtance of the ſecond

---

could be ſuppoſed nearly competent, according to what is frequently advanced in this work; but to look round and ſee men, and of ſome underſtanding, ruſhing into a buſineſs abſolutely requiring a junction of mechanical, chemical and philoſophical knowledge; excluſive of the common concerns of all buſineſſes, leaves little room to wonder how ſoon they get confuſed in every ſenſe of the word, and that what they produce is diſgraceful, and of courſe unprofitable.

Digitized by Google

cond part, as more applicable to theory, or those principles, without which, practice must ever be uncertain in its operation, or incomplete in its effects; therefore, be it well remembered, that

THEORY is the BASIS of PRACTICE.

ALL OPERATIONS ORIGINATE FROM A CERTAIN POINT, HOWEVER DIFFUSIVE THEY MAY PROVE AFTERWARDS.

ALL SYSTEMS ARE COMPRIZED OF PARTS THAT HAVE A RELATION WITH EACH OTHER.

PRINCIPLES SHOULD BE CONSIDERED BEFORE OPERATIONS ARE PURSUED.

IN OPERATIONS THERE IS A CERTAIN POINT OF TIME WHEN AN *EFFECT* IS OBTAINED, AND GOING FURTHER IS SUPERFLUOUS OR INJURIOUS.*

And, as in the positions at the end of the first part it is said, EXPEDITION WITHOUT PRECIPITANCY IS THE ESSENTIAL SPIRIT OF BUSINESS, so here it is said, that

CERTAINTY

* See note 16 to Copper-work, and about the scald, at the end of Maddering.

Digitized by Google

CERTAINTY OF EFFECT IN ANY PROCESS IS THE MATERIAL OBJECT, the ULTIMATE POINT, or the GRAND DESIDERATUM to be, IF POSSIBLE, OBTAINED.

Hence, for the laſt time, it is obſerved, that in purſuit of this MATERIAL OBJECT, and, in order to it, to procure a familiary with cauſes and effects, the ſprings of operation ſhould be diſcovered, the channels traced which flow from them, theſe channels re-traced to their ſprings, and the various connections conſidered as intently as poſſible; thus from the conſequences of thinking as well as acting, a capability of looking through every ſtage of proceſs to the laſt will neceſſarily follow, the general cry of the difficulty of managing the buſineſs be partly removed, and a greater CERTAINTY of EFFECT be obtained, with its conſequent appendages of profit and credit, as well as of mental ſatisfaction, (15) and

(15) If it be not too ludicrous, it may be here ſaid, though ANXIETY be not entered in the Journal or Ledger, yet much may very often be placed to its account.

The anxiety here alluded to, is not ſo

Digitized by Google

and the writer will go ſo far as to ſay, that under ſuch circumſtances, from the nature of many of the proceſſes, in which fancy, taſte, arts and ſcience, lend their influence and powers, it would (extravagant as all this may ſeem to the mere drudge) be to an active and penetrative mind, a perpetual ſource of rational exerciſe; and ſupply an extenſive fund for philoſophical inveſtigation, and intellectual enjoyment. But, he muſt go further, and ſay, that until men of this complexion, able to render that a pleaſure, which to others, however profitable, is perplexing and burthenſome, are more engaged in it, than now are; little may be expected beyond its preſent confined powers of execution, and *relative* degrees of effect.

ſo much that which ariſes from the cauſes hinted at, in note 51 to Colour-making, or thoſe that are inſeparable from buſineſs, ſo much as that reſulting from miſtakes in operations. To preſcribe equanimity in ſuch caſes is uſeleſs; the remedy muſt be a preventative; but, nevertheleſs, though a man is not to be reaſoned with in a perturbed ſtate, ſomething may be advanced at other times, which if imprinted on the mind, may prevent or leſſen that mental ebullition. Of which ſee the Eſſay on the relative duties of Maſters and Men to each other.

Digitized by Google

GENERAL REFLECTIONS,

or

DESULTORY SUGGESTIONS

relative to

CALLICO-PRINTING;

and various articles allied to it;

which may be considered either as improveable hints, monitory effusions, or mere occasional observations.

AS one excitement to forming the whole of this work, was the disagreeable reflection of many being at the head of the business treated of, little competent to the management of it, even in its present state; so the writer would be happy to see every Callico Printer, what he ought to be, a man of genius, as well as a man of business, or any other quality; as emulation would undoubtedly be one consequence, and the effects of emulation among men of genius, no one can be ignorant of, is aiming at superior excellence over each other, or the exaltation of their respective professions; for supposing, instead of two or three Printers maintaining a respectability, because it is certain the majority of them cannot reach

Digitized by Google

it, that the performances of every one were equal to the beſt now done; what is it thoſe *very* few who are at the top of the profeſſion would not attempt in order to retain their pre-eminency? (1) and what is it that might not *further* be done for furniture, hangings, ornaments, and other appendages of Opulence and Taſte, were Callico-printing countenanced (to carry on this illuſion) as the great Colbert, under the auſpices of the great Lewis, countenanced the art of dyeing? (2) and what advantages would not attend it in various caſes, were it rendered as much an object of the Great and Refined, as many articles of faſhion, taſte, and

(1) What is it a certain ſenatorial Printer would not attempt, were he in a line of commanding a price? for who is more capable or ſpirited? in ſhort, what is it any man would not attempt, whoſe maxim is, "A Man may be a Lord if he *will*?" — See the retroſpect!

(2) The reign of Lewis XIV. has been deemed the third Auguſtan age; and in Lewis's SPLENDIDLY DESPOTIC reign, ſo emphatically termed by Burke, Colbert had only to ſuggeſt, and Louis commanded it to be done.—See 5th note.

Voltaire makes four ages, i. e. of Alexander, Auguſtus, Medicis, and Lewis.—See likewiſe Gwin on deſign.

Digitized by Google

and luxury are, though of leſs intrinſic value? as nature, by exquiſiteneſs of execution, might be more cloſely imitated, and fanciful deſigns farther aſſiſted, than they can poſſibly be by the common modes now in practice; but, at preſent, perſons of taſte and judgment in drawing, painting, ornament, &c. (if unintereſted in the buſineſs) rarely find any thing worth their notice in the beſt execution of the beſt full chintz patterns, as being far behind a tolerably decent imitation of nature, either by painting, tapeſtry, weaving, needlework, or even paper printing (which by the way is now in a riſing ſtate) (3) even the neceſſary out-line is a ſufficient bar; and to inſtance an eſſential part of ſuch patterns, a roſe, how little like nature in ſhadow, folding, ſhape and colour, is the beſt three red roſe that ever was, or even can be, printed in the uſual courſe of

(3) See a French paper pattern of roſes, (the writer thinks imported by Middleton,) which at a proper diſtance has the effect of a painting;—But when had cloth ſuch an effect?

In France, paper printing, in many reſpects, throws Engliſh callico printing to a great diſtance; but it is there made worth employing firſt-rate artiſts as deſigners.—See the advertiſement at the end.

Digitized by Google

xecuting patterns! perhaps the neareſt approaches to nature in drawing, as far as cutting would allow, and in colour, as far as three reds, three purples, buffs, olaves, and ſo on would permit, have been in various patterns of Kilburn's; (4) and particularly ſo, in reſpect to drawing, in his late excellent dark ground tinted plate patterns; but how ſoon was one ſhabbily imitated, and underſold? (ſee note 9 to the retroſpect) as has been the caſe with many of his coloured patterns; and what is diſagreeable to mention, when ſpeaking

(4) His patterns for 1790 run chiefly on an imitation of ſea weed, and in effect, at leaſt, excelled what any other printer exhibited, and is particularly noted here, as being an inſtance of what might be done, were Printers not confined to a certain expence; for the cutting in them is ſuch, that no other Printer could or would execute them; and no other Draper, but he for whom they were done, would have dared to engage them: in fact, ſtrange as it may ſeem to many, and incredible to ſome, it is without flattery here obſerved, that out of the great number of Drapers in England, Scotland and Ireland, there is but that one who boldly ventures, in concert with the Printer above mentioned, to ſtrike into unbeaten tracks, and conſequently prevents that *langour* in exertion and *ſicklineſs* of complexion which otherwiſe would be the caſe.

Digitized by Google

ing of such exertions, probably the retailers' ends were better answered; hence, how can persons of taste, fashion or opulence be expected to countenance a business, while (by way of instance) for what such persons would willingly give five or six shillings a yard, their very servants can have an imitation of, or what has nearly the effect, for two or three? and what stimulas has genius and industry to exert themselves, when exertions are liable to be quickly imitated, most commonly in a slovenly manner, and shamefully undersold? this alone is enough to quash the spirit of exertion; therefore the writer confidentially says, if any regard be due to the improvement of a profession, requiring genius and a philosophical understanding to conduct, it has a claim on the attention of the highest legislative powers, that such a distinction and regulation be established (beyond the meaning of the late act), so as to annihilate such practices; but this can only be done by preventing that confounding of the excellent and execrable, where inferior work, whether original or imitative, chymick or fast, answers the general marketable purpose as well as, or better than, the best.—See the retrospect.

Digitized by Google

In whatever light this ſuggeſtion may be looked at, by thoſe whom it concerns, or thoſe to whom it is immediately directed, it is affirmed that the great Miniſter juſt mentioned, as he deemed the art of dyeing worth his endeavour to fix on an eſtabliſhment, which comprehended ſuch a diſtinction and regulation (confirmed ſince his time) (5) would no doubt have extended his wiſhes to this object; and the rather, as Callico Printing, by exhibiting figures, flowers, and fanciful objects, on certain articles, inſtead of merely colouring them, is indiſputably a great improvement on dyeing.—See note 49 to colour-making,—and from ſuch conſiderations, however preſuming

(5) They are carried ſo far, that Dyers who profeſs dyeing faſt colours, are not allowed even to keep in their ſhops, the drugs uſed for falſe or fugitive ones.—See the end of the ſuggeſtions on Chymick Printing. And this by the way, may ſerve to juſtify what is advanced about Chymick Printing; on the neceſſity of ſome regulation on that point, as well as the apprehenſion of the conſequences of an overflow of inferior and low priced work, though executed with faſt colours.

Digitized by Google

presuming it may appear to direct any thing like dictation to a Premier, he is notwithstanding here told, that though an interested individual may naturally enough say, 'What value I the disrepute attending my productions, or even the execrations of my practices by posterity, so I gain my pecuniary ends? yet a Minister, from his situation as a general Guardian of Manufactures, is bound to take the matter up on a more liberal scale, and to regard the reputation and prosperity of the rising generation, as well as the present; therefore, pressing forward the immediate subject of these suggestions, before the Minister is again applied to by deputations (6) from town or country

(6) And why should not the Minister attend to a deputation from those who have the respectability of the business, and its advancement in point of execution, at heart, as well as giving an ear to deputations from others, who have only an idea of doing a great quantity, upon plans calculated for immediate emolument, however highly they may talk of sinking vast capitals, employing 5, 10, or 20,000 hands, forming extensive connexions, encreasing the revenue, &c. &c? for, annexing the writers

Callico-Printers, for partial or other illaudable pur-

writer's ideas of improvements to this political one, advancing the respectability of the buſineſs muſt advance the pecuniary worth of its operations; and by procuring new and more reſpectable openings for its reception, it would bear higher duties, compenſating for what deficiences there might be in quantity of work, if that ſhould be a conſequence; which however, on the ſuppoſition of ſuper demands only for what is ſuper-excellent, would have little to do with what may be done in common, as is at preſent.

Beſides, as ſuch an improvement would *require* the moſt reſpectable perſons to carry it on, there would not be the probability of the Revenue being defrauded, as frequently done by indigent or deſperate adventurers; and which many probably ſuppoſe is oftner the caſe than it is, when work is ſold in the ſhops for hardly more than the prime coſt of the cloth, every one not knowing why it can be ſold ſo.

(☞ Whenever improvements are ſpoken of, it is begged to be underſtood that the uſual courſe of practice ſhould firſt be rendered certain.)

As to what is ſaid of a Prime Miniſter's knowledge of trade (if ſuch a topic may be here ventured

purposes, let him be here informed, that a profession, which is a great source of revenue, instead

tured on) it can only be on a general scale, as he cannot know much of the minutiæ of it, and much less of particular points, where every individual is differently interested and circumstanced, from each other;* and in this case it will well admit a query (some may think not) whether those deputies from the country, when closeted with the Minister, a few seasons back, were as ready in explaining to him the nature and consequences of those practices that caused the Town-Printers to apply for a remedy,§ as they perhaps were

* *It is just remarked, as apposite to this observation, as well as relative to the subject of this work, that, at the late trial about copying a Pattern, a common Putter-on must have smiled at Mr. Erskine's attempt to inform the Jury how patterns were transferred to the block.*

§ *It can be said, that those whom such practices have particularly injured, are not solicitous about what printing is done in the country, so it were but done upon that principle of honour which ought to actuate Tradesmen, as well as any other class; and as a proof of the above suggestion, it is on record, that on the late trial, Lord Kenyon paid high compliments to the honourable behaviour*

Digitized by Google

instead of being properly nurtured, is not only kept back

---

were quaint, fluent, diversified or energetic, on the injury they might receive from (innocently to be sure) printing a pattern likely to be construed a copy?

Note, *It* is begged to be observed, that it is not because the practices often alluded to, are execrated, as done by this or that particular person in the country; since the first Printer, Draper, or any other concerned in the business about town, would have been treated just as freely in a similar case; for whether in Town or Country, he only is pointed who spiritedly and honorably *holds* his situation as a Tradesman, or as dastardly and disreputably contaminates it. Sheer necessity may perhaps plead for indulgence, and on that score pity is due rather than indignation, and pity is bestowed.

---

sion of the Prosecutor, on the conciliating compromise that previously took place between the parties; evincing that the Plaintiff only wished his "exclusive right" to be legally ascertained.

Digitized by Google

back from gaining maturity, but even its present scarcely budding state, has been and is attempted to be

---

lowed.—See note 51 to Colour-making. And well would it be for many, into whose hands these suggestions may fall, if they prevent their being added to the list of those active or passive undermíners and debasers of that respectability in operation, and that liberality in dealing, which is the proper foundation and prop of any profession, trade, or manufacture whatever.

Of piratical or invasive oppressations, the late adjudicated repulse (see note to the retrospect) adds to the triumph of legitimate exertions; and genius and industry may look forward with a hope of proper encouragement and protection; for in this case it may on an equitable principle be said (and Lord Kenyon's oral testimony (see note 9) was to that effect) patterns should be considered like literary property.

It is said "attempted," because all have not succeeded. The firm of Livesey & Co. must never be forgotten, and as yet may be ranked first among monsters of this kind; being equivocal in its generation, misshapen at its birth, irregular in its accretion, and premature and infectious in its dissolution.—See this retrospect.

Digitized by Google

be nipped and debaſed, by certain individuals, in view of making that profit in a few years, which ought to be a patrimony legally deſcending to after-ages; as well as preventing it from rivalling moſt other profeſſions depending on the exertions of genius, by bringing it entirely under marketable conſtraint:(7) let him likewiſe be told, it was undoubtedly in this light that the great Colbert would have viewed it (making allowance for local and temporary circumſtances) ſince he acted not as if he conſulted a few intereſted individuals, or as to throw immediate riches into the Treaſury, much leſs as if he wiſhed to *force unnaturally* any art to its higheſt ſtate, for the pride of beholding it ſo himſelf, no matter how ſoon after his time it withered; no, that admirable

(7) *Mere mechanical or manual operations perhaps are proper to lay under ſuch reſtraint; thus the plain cloth as being a mere piece of labour may be under ſuch regulations; but when an excellent piece of fancy is exhibited, it ſurely ought not to come under marketable or manufacturable regulations, or at leaſt it ſhould be conſidered as a diſtinct article.—See the end of note 1 about combination in the retroſpect.*

rable man was ſatisfied with the dawn of ſuch a proſpect; he was content to plant the arts in ſuch a ſoil, that the roots might take firm hold, and the growth be natural, though it might require ages to bring the fruits to their higheſt ſtate of cultivation; or before individuals, the nation in general, or the world at large received emolument or pleaſure from them.

Being on this ſubject of improving the profeſſion treated of, it is intimated, that ſome years ago, an artiſt of repute (Mr. Edwards, F.S.A.) was employed in painting flowers, &c. as patterns for working furniture, &c. for the Queen; now here, looking forward in an effervescence of hope, for the exaltation of Callico-Printing, what would not a high price (ſuppoſe it is ſaid 30 or 40 ſhillings per yard) enable an ingenious Printer to perform, by uſing a greater number of ſhades of colours, more blended, or leſs abrupt in their gradations and tranſitions, with the pencilling applied to more advantage in attempting to imitate, on various materials, patterns ſo drawn and coloured? it is ſurely to be inferred, he could do ſomething that the firſt Artiſt in the kingdom would applaud for its effect; and a ſuggeſtion,

geſtion is preſumed on, that Royalty only waits to know ſomething could be done for furniture, ornaments, &c. to match theſe paintings; which being known and noticed, no one will diſpute the influence ſuch notice would have on the ſubordinate degrees of rank and faſhion; and then (ſtill indulging a deluſive hope) from ſuch an operoſe mode of execution, elevated degree of effect, and proportionate value of the performance, the Artiſt above-named, and others of acknowledged capability, would have that juſtice done to what he or they could produce, not poſſible to be obtained by the preſent higheſt efforts! then would the uſual uncouth imitation of nature, the reſtricted diſplay of fancy, the unmeaning appearance of what are even called good patterns, and that criterion of excellency by what will ſuit the market, be ſuperſeded by performances, that in effect, would be compatible with nature, taſte, and propriety, and accordingly would be judged by a ſtandard juſt and immutable, totally diſtinct from that of the market, or the caprice of the day! and then would commence an æra in the hiſtory of Callico-printing, honourable and celebrious to the commenceers, and ſuper-eminently reputable to every one concerned in the operation, or in the diſpoſal of what may be performed!

Digitized by Google

Before the closing of this digression, it may be mentioned that an eminent Printer (Arbuthnot) had a pattern cut for Queen Caroline, but though elaborate and well executed, it was in the common stile of effect, with 3 reds, 3 purples, an outline, and so on, and produced by the usual and uncertain course of process; but this the writer cannot help saying is what remains, not only to be rendered more certain in operation, but, to be exceeded in effect; and must be exceeded before Callico-printing can approach to even a very humble degree of perfection.

But, notwithstanding what has been said, it is too obvious, that the settled œconomy of the market, which says nothing beyond such a price will sell, is the most insurmountable obstruction to any considerable improvement in execution and effect, or even to equaling what is done on the Continent; for the most elaborate of our work, that, as the phrase is, will pay, is only an approach towards the excellency of our neighbours.(8)

Another

(20) It is known such work is done on the Continent, that, according to the price of labour here, would

Another impediment results from the common idea received among many Printers, that rendering

would require 12 or 15 shillings, or more per yard, to execute, if it even could be done; *but many Drapers look now more for profit from bargains than from a regular custom of giving so much for printing, and advancing it on the buyer; and as this is an irregularity that must be removed, before an improvement can take place, it would be beginning a new æra in trade, and new modes of conducting it: and possibly, notwithstanding what is said note 51, *some* Drapers, in their connections with *some* Printers, would not wish work always to be so well done, as not to have occasion for a Damage-book. —See the last note but two to Putting-on.

* *It is particularly in the article of pencilling that the best Continential work excels ours (see Pencilling, Vol. I) but why the cutting and printing should, is not so clear; some late efforts, however, shew emulation is not wanting, but to effect an equality; the tyranny of the market must be crushed in certain cases, as above alluded to.*

The above is applicable to paper printing on the Continent, (as before spoken of) but what is imported not being under a marketable controul, no more than Foreign prohibited Chintz, it can command a proper price, and is therefore in request by the opulent.

Digitized by Google

dering operations cheap, easy, and expeditious, are the only points proper to be deemed as aiming at improvements, from being of immediate pecuniary consideration (9) besides, it is a very difficult matter to get journeymen out of an old track.

In

(9) This it is granted is so in this sense, but then the consequence is lowering the price of the articles, which (as often particularly dwelt on) strikes at the very root of that respectability which only can render Callico-printing more worth the notice of the opulent and fashionable.* But according to the writer's idea of improvement, totally the reverse of that mentioned above, the consequences would be a greater demand for works of genius, an increase of mechanical and manual operation, and a more extensive request for utensils, drugs, &c. with a sufficient inducement for men of scientific knowledge, to make proper experiments on articles not in common use, at least in printing (see the notes at the end of the account of Colouring Drugs, and the end of the Retrospect) for thus it was, by calling forth the powers of Philosophy and Genius, in conjunction with the knowledge of the mere Practitioner, that the illustrious

Patron

* *This destructive principle, the writer is sorry to say, seems to crush any further progress in that elegant improvement, copper-plate printing.— See note* 10 *to the retrospect.*

Digitized by Google

In another light, a great hindrance lays in the lukewarmneſs with which Government liſtens to propoſals of countenancing any art, unleſs they tend to an immediate increaſe of revenue, or at leaſt do not interrupt the channels of it.

From theſe conſiderations, enthuſiaſtic as the writer may be in his wiſhes for the exaltation of the profeſſion in which he has a concern, it is feared, that what has been advanced muſt remain an ideal proſpect little likely ever to be ſubſtantiated; or be conſidered as an airy excurſion, productive only of a deluſive hope, or an imaginary advantage; and as thoſe who are particularly cramped and injured by piratical and debaſing practices, can do little more than complain, ſo, in reſpect to improvement, whatever may be ſaid for bringing the uſual courſes of operation into more certainty of effect, the buſineſs muſt nevertheleſs remain in this reſtrained and imperfect ſtate; which ſtrictly ſpeaking, is, that two

---

Patron and aggrandizer of the arts, above-ſpoken of, ſo advanced the art of dyeing, as to give France that pre-eminence in it which ſhe even retains to this day.

Digitized by Google

two or three can command a price to enable them to execute decent work (which is only so in a comparative view,) and the reſt fill the market as well as they are able; and thus, ſeaſon after ſeaſon, Calico-Printing retains the ſame complexion, only the features are now and then a little altered, and frequently diſtorted.

However, according to the mode the writer affects of bringing what he advances to a point,* ſo here it may be ſaid that

The improvement of any profeſſion depends on a knowledge of its principles, and the application of them to practice.

Increaſing the reſpectability of any profeſſion increaſes its intrinſic value.

Under-working, under-ſelling, and piratical practices, are, on the contrary, deſtructive, or ſubverſive of it; and this conſideration comprizes, the uſual conſequences of adopting cheap and expeditious modes of operation.

Turning now to the treatiſe itſelf, the writer is aware it may be ſaid by ſome, that what he has propoſed (and what he may offer) is unattainable by

* See the ends of the firſt and ſecond volumes.

Digitized by Google

by the generality of those to whom addressed: and even romantic in some cases; or else that it does not give information such as many expect, who think nothing but practical directions can, or ought to be spoken of:—to the first remark he can only say, he certainly attempts to go out of a beaten track; to the other, (as often repeated) it is as little in his inclination, as in his power, or perhaps any other persons', to exhibit such directions; his intention being to pursue a middle course, offering the chief of what he says, not to amuse novices, deceive the credulous, or oppose the reasonable, but as almost mere matter of reflection, to those who are in a certain state of practice; as well as earnestly recommending it to those who may be inclined to enter into the business, to consider the nature of it; or, if determined to enter, to be equally aware of the difficulty of conducting it.*

Whether what he advances under either idea, is equal to the intention or not, he will not use any thing like the insipid hacknied apology of "leaving it to a candid Public to determine," but he will venture to say, that as *his* highest idea of the usefulness of this work, is the probability of its rousing reflections on the principles of

Callico

* See note 7 to copper work.

Digitized by Google

Callico Printing, which otherwiſe might have lain dormant, his views muſt appear as tending ultimately to encreaſe it in beauty, taſte and expreſſion. This however, it is enforced, cannot be attained till a philoſophic ſpirit is rouſed and diffuſed among Callico Printers in this country, (which if theſe humble efforts may any way aſſiſt, the writer will be amply conſoled for any treatment they may meet with) and as he thinks he could point to two or three, whoſe latent powers only want rouſing, it is here diſtinctly intimated* that if modern philoſophy be called in to aid what is already known and performed (21) it will appear it does not only eſtabliſh theory on grounds more directly applcable to practice, but

* It being only catually mentioned in this work.

(21) See Delaval on Colours.—Berthollet on Acids—Bergman on Indigo—but ſee eſpecially the annals of Chymiſtry.

Mr. Delaval's doctrine is, that colour is produced by light tranſmitted through tranſparent particles, from its reflection on a white ground or medium. —In Berthollet's memoirs, are particulars reſpecting the dephlogiſticated marine acid, of wonderful efficacy in ſolutions, bleaching, clearing the ground after boiling off, a teſt of the fixity of colour, &c. &c. —It is however as yet little uſed in England, in fact, a Revenue concern, that formidable *Remora*, is againſt it. (See likewiſe Nicholſon's Elements.)

Of the diſcoveries reſpecting air, much ſurely

Digitized by Google

but to render practice itself more simple and efficacious; and not only detects and removes impurities and imperfections in articles that oppose the severest common tests; but analyzes, rectifies and applies them beyond conception or belief: In short, it rivets speculation with practice, and the agreeable with the useful.

But

(as observed in the article of Maddering) might be turned to advantage. Fixed air having the property of renovating certain vapid liquors, of keeping meat sweet a long time, giving water a sparkling appearance and a most lively taste, as well as superlatively purifying it. (To convivialists it may not be inexcusable to add, that the beverage of punch is much improved by it.) The inference, however, to the Callico-Printer is, that water any how purified and joined with salts equally pure (note 36 to maddering) must be incontestably advantageous in colour-making, as the water likewise must be in bringing up colour. And every Printer has by him, the principal ingredients, viz. chalk and vitriol.*

*** An odd idea is adopted by some, that the Indian fast colours are raised by sand; some add the sun; of this, the writer has often enquired, but what *he* has heard is too absurd to repeat.—In truth, the principles of Indian fast colouring processes are like ours, for no other is known; and as they have existed some thousands of years (note 40 to colour-making) so there is no appearance of their ever being otherwise. A deal too is vaguly said of all the colours being put in with pencils. But this will be discussed in a history of Callico-Printing.

* *It has been mentioned how needful a stil would be in a colour-house. Chemists in their processes are particularly careful in this respect, and why not callico-printers, dyers, &c.?*

Digitized by Google

But while thus paying tribute to the exertions of philosophy, may the writer just glance at consequences which philanthrophy, however it may admire those exertions, cannot but deplore? namely, the depriving many of their (perhaps) only means of subsistence, and exciting them to acts of turbulence and desperation(22) and is the rather mentioned, as the present disturbances in the Callico Printing business are partly owing to such causes.(23) Hence, at any rate, in order to

(22) Sir Richard Arkwright is said to have cleared 50 or 60,000l. per annum by his Cotton Mills; but how fared it with the hundreds "turned over to Providence" by the invention?

N.B. A work is just published on the subject of granting patents.

What was it the ever to be execrated Firm of L——y, H———e, A——e, S——h and H—ll, wished to do with machine printing? (note 11 to the Retrospect.*)

(23) By Cylindrical printing. The report of a Patent for printing green (as has been mentioned) has caused a ferment among Pencillers: and so might the new mode of Bleaching above spoken of, from

* *One execrable attempt (rather extraneous here) not universally known, was to draw a certain Printer in Surry (see note 4) into their connection, not a month before they failed! It was however treated deservedly with the highest disdain.— Lay and Adams offered the same person 500l per annum to draw for them just before their failure:—Was this, folly or any thing worse?— See note 50 to colour-making.*

Digitized by Google

to compenſate, in ſome meaſure, for ſuch partial injury, by inſtituting ſomething generally advantageous (as often enforced) the improvement of effect, and procuring new and more reſpectable channels for diſpoſal, in all poſſible caſes, *ſhould* be always kept in view.

May it likewiſe be obſerved, though dwelt on elſewhere, that, as merely practical men in extenſive buſineſſes, are more alive to immediate "Loſs and Gain," (like Miniſters to certain ſources of Revenue) than to diſtant advantages, which require deviations from eſtabliſhed modes of practice or ſupplies, the greateſt diſcoveries ſometimes produce only a tranſient blaze, and are, alas! conſigned to oblivion, unleſs accommodated in ſome degree to what is already in practice. In ſhort, as the *mere* practitioner cannot

---

from the idea of its rendering watering, &c. unneceſſary, have ſome effect on Fieldmen.—See ſimilar thoughts where ſpeaking of chemick printing in the ſection of colour-making.

Of the diſturbances above alluded to, (allowing the above cauſe as ſome extenuation of them) it is juſt ſaid here, (ſee note 10 to the Retroſpect) while funds are ſupported, and the diſtinction of fair and foul ſhops retained; while different Maſters have different intereſts, and ſome actually benefit by the diviſions, it is impoſſible to conceive any end but a ſelf-deſtructive one, or until the members clearly ſee the evil conſequences, as above referred to, or at leaſt hinted at, or when it is taken up by the legiſlature, in an alarm for the revenue.

Digitized by Google

cannot understand the language of theory, till by gradual information his doubts and prejudices are removed, it is an overſight in ſcientific writers (with trepidation it is ſaid) to publiſh reſearches only as theoretical; greater, if announced applicable to practice with no practical matter incorporated with them; but greateſt of all, openly to avow a total ignorance of the practice of what they are offered to improve; as that at once precludes further notice from the merely practical man, who looks for practical information.(24) But, notwithſtanding theſe and all other impediments, and ſurely it is but fair to ſtate them; if a proper emulative ſpirit be but once raiſed, the writer ſtill hopes, deluſive as he may repreſent his hopes, he ſhall ſee London Callico-Printers' names in the liſt of the Royal Society, as well (with ſome little reproach to London Printers be it ſaid) as there are two or three country ones in that of the Mancheſter Philoſophical Society.---That he ſhall ſee practice grounded on philoſophical principles; and conſequently

(4) As for inſtance, will not a merely practical Dyer rather turn to the tranſlation of Hellot by Haigh, a profeſſed dyer, than to a late excellent one where the tranſlator avows his ignorance even of common technicals?—See likewiſe Dr. Eaſon's paper on bleaching. Vol. II. Mancheſter Phil. Tranſ.

Digitized by Google

ſequently rendered more certain and of better effect.---That he ſhall ſee this combination of Theory and Practice patronized by a Premier and vivified by Royalty ;(25) and that then he ſhall ſee England, as ſhe excels all other nations in arms and commerce, likewiſe excel, among other arts, all other nations in

THE ART OF CALLICO-PRINTING

---

(25). A premium coming from a Royal ſource, and adequate to the expence of the attempt, would go much further towards improvement than the premium for patterns. For one excellency there, is adapting them the beſt to the preſent reſtrained mode of execution ; but as this *would* much improve that mode, drawings would not be under the reſtraint they now are.—(See the end of note 9 to the retroſpect) and then Engliſh Artiſts, in their deſigns, would find inducement to emulate French ones. In fact, reſtrain in this firſt ſtage precludes excellency in the ſucceeding ones. (See notes 3 and 20 to this ſection) and until it be remedied, Engliſh Callico-printing will ever be behind that on the Continent, eſpecially what is *now* (1791) attempting at Juoy, near Verſeilles in France.

Digitized by Google

† Several articles ſpoken of or referred to in the preceding work are intended for a ſupplementary part, with an appendix of certain articles of undoubted utility, and all the appoſite *liberal* animadverſions, and even ill-natured truths, which the writer can procure. For as the developement of the ſubject is what he has in view (ſee Preliminary ſuggeſtions) he is on that account as willingly hoſtile to his own errors as any other perſon whatever can be, or as he would be to thoſe of others.

† This work not being formed to meet, indiſcriminately, the public eye, and the art of *Book-making* of courſe not being rigidly attended to, it, among other informalities, was not paged, that the ſections might be interleaved for the purpoſe of making *memoranda*, and that any one might form an index to his own mind. Beſides, it was of ſervice to the writer, in the deſultory, indeterminate and detached manner in which it was compoſed and publiſhed.

Books ſold by C. O'BRIEN, Bookſeller, &c. Iſlington, (late Deſigner to Mr. Kilburn) Pattern-Drawer and Operator in Metal for Block or Cylindrical Printing in Sets and Trails, to Callico-Printers in general, at (as cuſtomarily) the *Sun*, *Foſter-Lane*, and the *Burton* and *City Coffee-Houſes*, *Cheapſide*, *London*, or his occaſional Town reſidence.

Octavo Works, as frequently referred to in the preceding Work, moſtly Modern.

Nicholſon's firſt Elements of Modern Chemiſtry
Lavoiſier's Elements
Kirwan on Phlogiſton, in oppoſition to Lavoiſier

Digitized by Google

Cronſtedt's Mineralogy
Fourcroy's Chemiſtry
Berthollet's ditto
Bergman's ditto
Scheele's ditto
Watſon's ditto
Higgins on Acetous Acid, Air, &c.
Prieſtly on Air, &c.
Crawford's Theory of Heat
Higgins' comparative View of the old and new Doctrines
Annals of Chemiſtry, publiſhed periodically
Philoſophical Tranſactions of various Societies.

Quarto's.

Weiglib's Chemiſtry
Lewis's Philoſophical Commerce of Arts
Pomet on Drugs.

Octavo's.

Art of Dyeing Wool, Silk and Linen, from Hellot, D'Apligny, Macquer and others
Macquer's Elements of Chemiſtry
Neumann's Chemiſtry
Wilſon's ditto, &c. &c. &c.

*** Quarto Volumes are about 1l. 4s.—Octavo's about 7s.—Plain Bindings.

N.B. Any order or intimation left at the *Sun*, *Foſter-Lane*, will be carefully tranſmitted to him.

☞ Paper-hangings of exquiſite deſigns and adequate execution (chiefly foreign) and ſcarce Books, Prints, and Muſic, procured on proper notice. Specimens of the Hangings may be ſeen.

Digitized by Google

Digitized by Google

Digitized by Google

Digitized by Google

Digitized by Google

Digitized by Google